



SPECIFICATION CONTROL DRAWING

TECC0019C7

Issue 8
15-Apr-21
Page 1 of 2


COMMUNICATION CABLE - FOUR PAIR 22AWG S/FTP CAT7 LSZH

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of the referenced specifications. This document takes precedence over documents referenced herein.

PRODUCT DETAILS

DESCRIPTION		PHYSICAL CHARACTERISTICS		
Application:	100BASE-T4, 100BASE-TX, 100VG-AnyLAN, 1000Base-T (1 Gb Ethernet), 1000Base-TX, 155Mbps ATM, 622Mbps ATM, 10Gb Ethernet	Structure	Construction Number of Pairs	S/FTP 4 Pairs
Rated temperature:	75°C	Conductor	AWG Conductor material Conductor dimension(mm)	22 AWG Stranded Annealed Cooper (7/0.245) ± 0.02mm
Reference Standard:	61156-6,ISO/IEC 11801	Insulation	Insulation material Insulation dimension(mm) Nom. Thickness (mm)	Foamed PE 1.65 ± 0.05 mm 0.42 mm
Flammability Rating:	IEC 60332-3-25 & IEC 60332-1-2	Cabling	Twisting lay length Cabling lay length	≤ 30 mm ≤ 200 mm
Stranded Tinned Copper Conductor		Filler	Material	N/A
Colour-coded PE Insulation		Binder	Material	N/A
LSFRZH Jacket		Shield	Individual shield & material Primary overall shield & material Shield nom. Coverage Drainwire	AL-Foil Stranded Tinned Copper 35% Min. N/A
Packaging: Per customer request		Outer Jacket	Outer Jacket material Outer Jacket Thickness (mm) Overall Nom Dimension (mm) Outer Jacket Rip cord Outer Jacket Colour	LSFRZH 1.0 mm Nom 9.90 ± 0.30 mm N/A Per Customer Request

CROSS SECTION

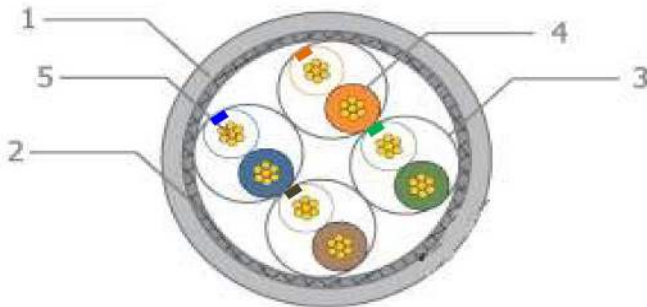

1	Jacket
2	Braid
3	AL-Foil
4	Insulation
5	Conductor

MECHANICAL CHARACTERISTICS

Outer Jacket	Operating Temp Range Bulk Cable weight Max. recommended pulling tension Min. bend radius (Install) Tensile Strength Elongation Ageing Condition After Ageing Tensile Strength After Ageing Elongation Cold Bend	-20°C to +75°C 94 kg/km 80 N 8 x O.D. ≥9 Mpa ≥100% 100°C x 168hrs ≥70% of Unaging ≥50% of Unaging No cracks -20°C/4hrs
---------------------	--	---

ELECTRICAL CHARACTERISTICS

Finished Cable	Nom. Mutual Capacitance Pair-Ground Unbalance Nom. Velocity of Propagation Max. Delay Skew Max Conductor DC Resistance Resistance Unbalance Min. Insulation Resistance Max. Operating Voltage - UL	≤ 5.6 nF/100m (@1kHz) ≤160 pF/100m 65% 25 ns/100m 145 Ω/km (@ 20°C) 2% 5000 MΩ·km 300 V
-----------------------	---	--

JACKET MARK

"TE CONNECTIVITY - TECC0019C7 - 4PR 22AWG STRANDED CAT 7 CABLE - YEAR OF MANUFACTURE - BATCH NUMBER - <metre mark>"



SPECIFICATION CONTROL DRAWING

TECC0019C7

Issue 8
15-Apr-21
Page 2 of 2

COMMUNICATION CABLE - FOUR PAIR 22AWG S/FTP CAT7 LSZH

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of the referenced specifications. This document takes precedence over documents referenced herein.

ELECTRICAL CHARACTERISTICS CONTINUED

Frequency	Impedance Upper Limit	Impedance LowerLimit	ATT	RL	NEXT	PS NEXT	FEXT	PD
(MHz)	Zu (Ω)	Zl (Ω)	(Db/100m)	(dB Min)	(dB Min)	(dB Min)	(dB Min)	(ns/100m Max)
1	-	-	3.0	20.0	78.0	75.0	70.0	570.0
4	115.2	86.8	5.6	23.0	78.0	75.0	70.0	552.0
8	112.6	88.8	7.9	24.5	78.0	75.0	70.0	546.7
10	111.9	89.4	8.8	25.0	78.0	75.0	70.0	545.4
16	111.9	89.4	11.1	25.0	78.0	75.0	70.0	543.0
20	111.9	89.4	12.4	25.0	78.0	75.0	70.0	542.0
25	113.2	88.3	13.9	24.2	78.0	75.0	70.0	541.2
31.25	114.6	87.2	15.6	23.3	78.0	75.0	70.0	540.4
62.5	120.2	83.2	22.3	20.7	75.5	72.5	70.0	538.6
100	125.3	79.8	28.5	19.0	72.4	69.4	70.0	537.6
200	135.7	73.7	41.2	16.4	67.9	64.9	70.0	536.5
250	140.0	71.4	46.5	15.6	66.4	63.4	70.0	536.3
300	139.8	71.5	51.3	15.6	65.2	62.2	70.0	536.1
600	139.8	71.5	75.1	15.6	60.7	57.7	70.0	535.5

Remark : Cable that meet the requirements of the template are not required to be measured for return loss; alternately cables that meet the return loss requirements are not required to be measured for characteristic impedance.

Mechanical performance Requirements for the tests for outer jacket.

EN 45545 R15&R16 HL3	T09.01 EN 60332-1-2	Single vertical flame	IEC 60332-1-2
	T09.03 EN50305 (for	Bunched cable flame	IEC 60332-3-25
	T13 EN 61034-2	Smoke emission	≥ 70%
	T15 EN 50305	Toxicity index	ITC ≤ 6
Ozone resistance	(0.00015-0.00025%)(40±2)°C	No Crack	EN50305 7.4.2
Mineral oil resistance	IRM902/(25)°CX24h	Tensile strength Variation ≤±30%.	EN 60811-2-1 10
		Elongation at break Variation ≤±40%.	
Fuel resistance	IRM903/(25)°CX24h	Tensile strength Variation ≤±30%.	
		Elongation at break Variation ≤±40%.	
Cold bend	- (20±2) °C,8D	No Crack	EN 60811-1-4 8.1
Assessment of halogens	HCl and HBr	≤0.5%	EN50267-2-1
	pH	≥4.3	EN50267-2-2
	Conductivity	≤10µS/mm	

Approval Electronic sign off - no signatures will appear.