
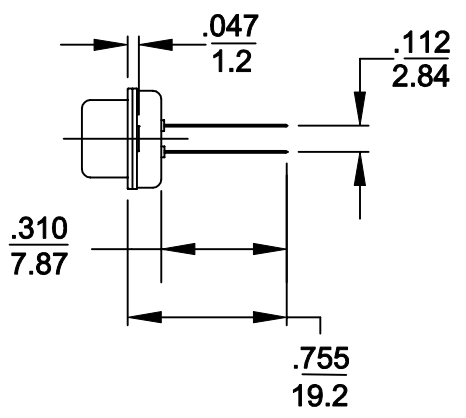


**DESCRIPTION: WIRE WRAP FILTERED D-SUB**

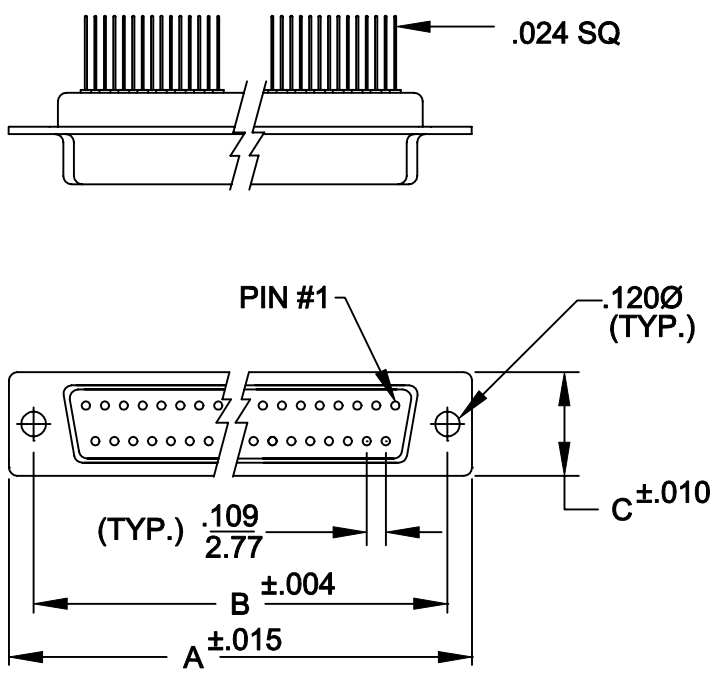

	A	B	C
9	1.204	.984	.480
	30.60	25.00	12.20
15	1.535	1.312	.480
	39.00	33.30	12.20
25	2.078	1.850	.480
	52.80	47.00	12.20
37	2.724	2.500	.480
	69.20	63.50	12.20
50	2.622	2.405	.598
	66.60	61.10	15.20

477-XXX-242-XX1

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 009 \_\_\_\_\_  
 015 \_\_\_\_\_  
 025 \_\_\_\_\_  
 037 \_\_\_\_\_  
 050 \_\_\_\_\_  
 GENDER \_\_\_\_\_  
 1 = MALE \_\_\_\_\_  
 2 = FEMALE \_\_\_\_\_  
 TERMINATION \_\_\_\_\_  
 4 = WIRE WRAP \_\_\_\_\_  
 SHELL PLATING \_\_\_\_\_  
 2 = TIN \_\_\_\_\_  
 HARDWARE OPTIONS \_\_\_\_\_  
 00 = NO HARDWARE \_\_\_\_\_  
 PLATING OPTIONS \_\_\_\_\_  
 1 = GOLD FLASH \_\_\_\_\_

**SPECIFICATIONS:**

**MATERIALS:**

- SHELL: STEEL, TIN PLATED
- INSULATOR: UL 94V-0 RATED PBTP GLASS-FIBER REINFORCED

**ELECTRICALS:**

- INDIVIDUAL CAPACITOR VALUE = 1000 pF
- OTHER VALUES AVAILABLE: CONSULT FACTORY
- CURRENT RATING: 5 AMPS
- CONTACT RESISTANCE: <10 mOHMS
- INSULATOR RESISTANCE: 1010 OHMS
- VOLTAGE: 1 KV / AC
- TEMPERATURE: -55°C TO +125°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: <b>WAYNE ROBBINS</b>	DATE: <b>9-03-98</b>
		CHECKED:	DATE:
<b>NorComp</b>	SCALE: 1:1	SHEET 1 OF 1	REV 2
	DWG NO. <b>477-XXX-242-001</b>		