

DESCRIPTION: 21WAS Female Connector -40 Amp Contact

Specification:

Shell: Steel, Tin Plated

Insulator: PBT +30% Fibre-Glass,  
Black, UL 94V-0

Contacts: Brass - Gold Flash over Nickel

Current Rating: Signal - 5 Amps




Current Rating: Power - 40 Amps


Contact Resistance: 15mΩHMS MAX.

Insulator Resistance: 1000 MΩHMS MIN.

Voltage: 500V AC for 1 minute

Temperature: -50°C to +100°C

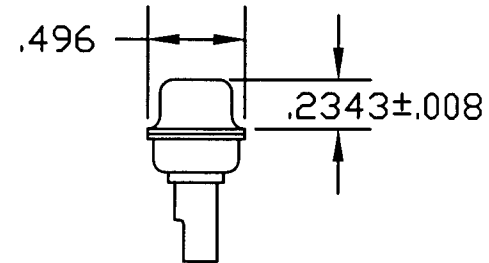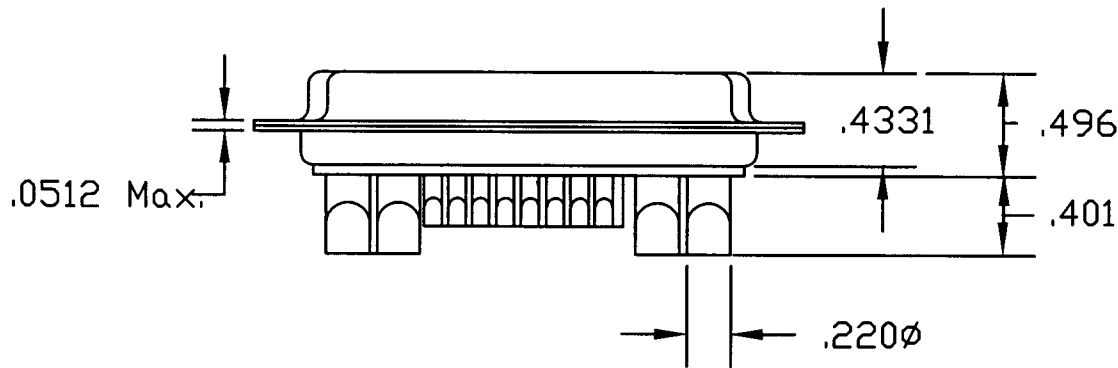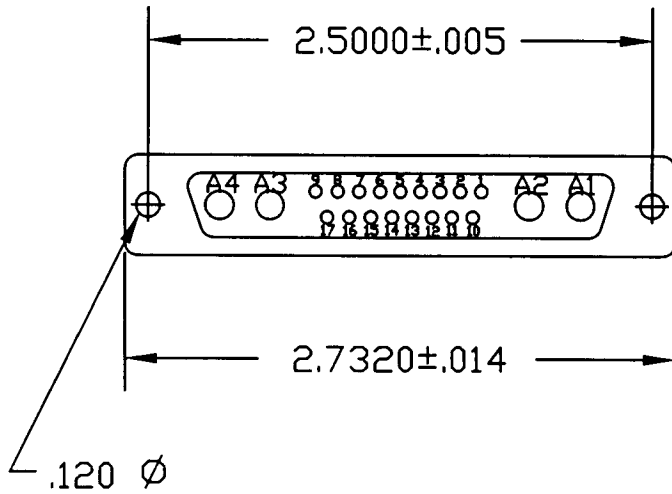

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 4-11-01
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE:	SHEET 1 OF 1	REV 1
		DWG NO. 680-21WAS-401		