

т	۵	<b>п</b>	m	0



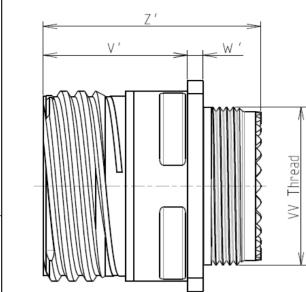

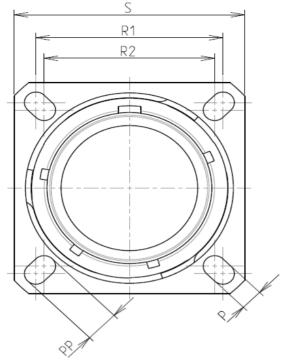

## CHARACTERISTICS

4

ω

 $\sim$ 

\_

-Shell Material	: Composite
-Shell Plating	: Olive drab Cadmium
-Insulator	: Thermoplastic
-Contacts	: Copper Alloy
-Seals & Grommet	: Silicon Elastomer
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minin
-Durability	: 500 Mating cycles
-Delivered with Souriau	contacts and Accessories
-Temperature Range	65℃ to +175℃

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	20.62			
R2	18.26			
S	26.2±0.3			
V'	19.5+1.4/-0			
W'	2.1/3.65			
Ζ'	32 Max			
VV THREAD	M15x1-6g			

G	П	т			0	σ	A		_
		S R1 R2 I I I I I I I I I I I I I I I I I I				WWN AS EXAMPLE			4
CHARACTERISTICS  Standard : Based on MIL-DTL-38999 Series III	Keying Shown	Connector dimension Dim Nominal P 3.25±0.2							
-Shell Material: Composite-Shell Plating: Olive drab Cadmium-Insulator: Thermoplastic-Contacts: Copper Alloy-Seals & Grommet: Silicon Elastomer		PP         4.93±0.2           R1         20.62           R2         18.26           S         26.2±0.3           V'         19.5+1.4/-0           W'         2.1/3.65			due to a use of the Pro the Specifications issued b		oly with a third party ice.) tion & Control List		
<ul> <li>-Contact Plating : Gold over copper Alloy 0.8μm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> <li>-Temperature Range : -65°C to +175°C</li> </ul>		Z' 32 Max VV THREAD M15x1-6g	_			FR D011J04JN	Not Listed	] ] 	2
-Salt Spray : 2000 hours				A 06-10-201 ISS DATE Designed By:	16 First Release Latest modification - by Date:		CUSTOMER DRAWING	MOD N°	
				TITLE Composite Receptacle 8D series					
BASIC SERIES:     8D     0     -     11     J       SHELL TYPE     : Square Flange Receptacle     -     -     11     J	04 J N			SCALE NA	-[	ral linear rances: ±	NPRDS / PROJECT 859	norty of	1
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 11		ORIE CONTACT TYPE : SOCKET (15	NTATION : N 500 Matings)	SOURIAL	J WWW.SOUF	RIAU.COM	This document is the pro SOURIAU it must not be reprodu communicated without p	ced or	
PLATING : J = Olive drab Cadmium		CONTACT LAY	1	FORMAT A3	80	IRIAU DRG N° 011J04JN-C		SHEET 1/2	
H G I	F	E		D	С	В	A		

	т	۵	п П	т	D	0	
		Contact Layout				ı	Panel Cutou
4	-×	$ \begin{array}{c}                                     $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0)	
	Shell Arrangement Numt size no. cont 11 -4 4	V-axis (mm)         Y-axis (mm)           + 0.65 (1.65)         .065 (1.65)           + 0.65 (1.65)        065 (1.65)           - 0.65 (1.65)        065 (1.65)           - 0.65 (1.65)         +.065 (1.65)           - 0.65 (1.65)         +.065 (1.65)           - 0.65 (1.65)         +.065 (1.65)           - 0.65 (1.65)         +.065 (1.65)           - 0.65 (1.65)         +.065 (1.65)           - 0.65 (1.65)         +.065 (1.65)				ØA	<u>ØT</u>
ω						Dim ØA ØAA R1 ØT	A
	+					SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products wh by either of
N						PN: {	Country FR 8D011
					A 06-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:	
<u> </u>					SCALE NA	Gen	eral linear lerances: ±
					SOURIA		
					FORMAT A3	81	URIAU D011JC
	Н	G	F	E	D	C	

