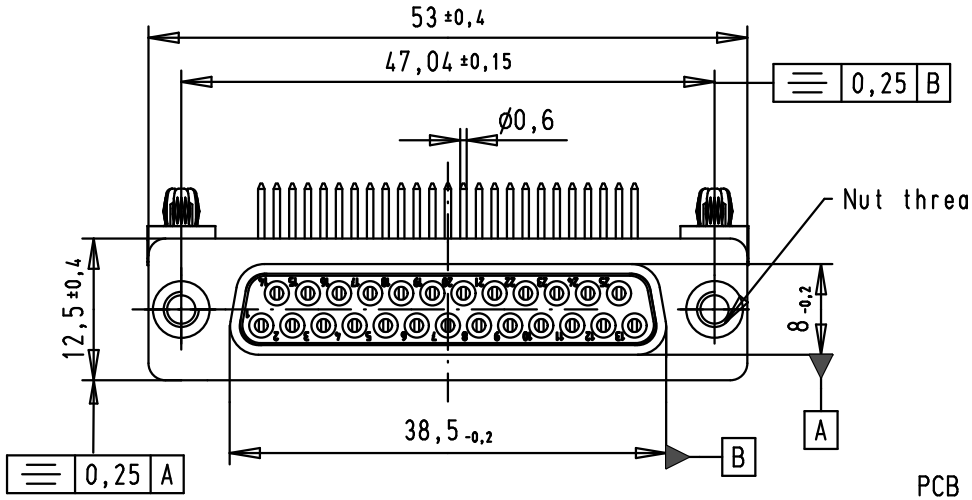

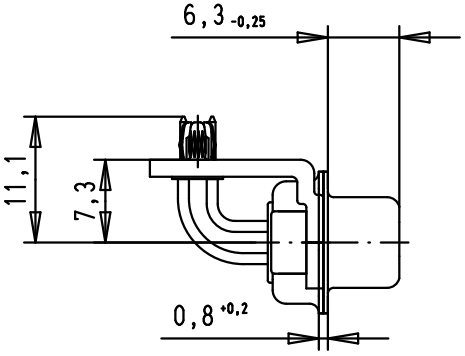

SPECIFICATION

Peformance level	PL2
Filter type	C
Capacitance	1000pf±20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

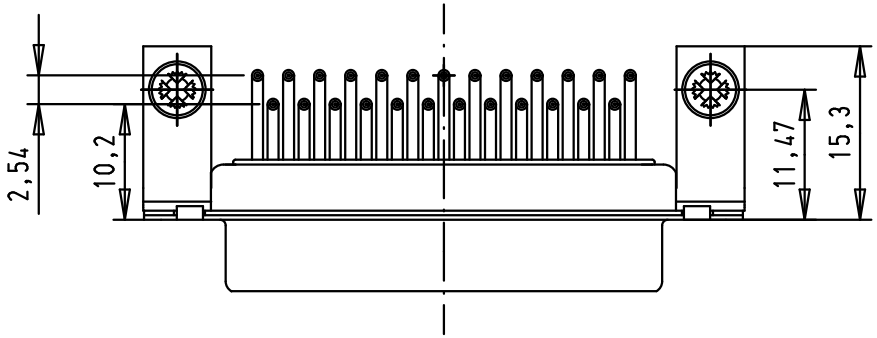

PCB Layout, Component side, thickness 1,6 mm

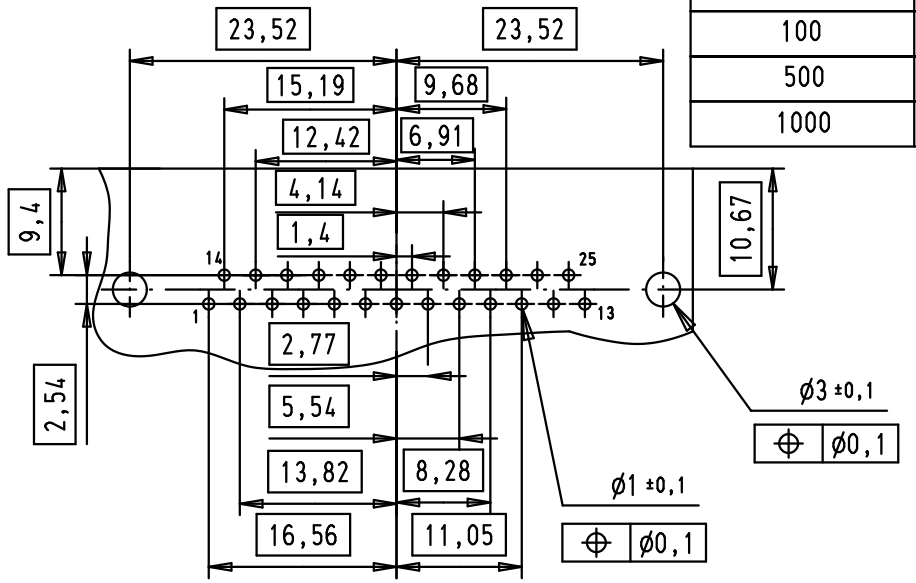

							Dat.	Name			
						Detail.	8-JUL-02	CV	All Dim. in mm Orig. Size DIN A 4	D-Sub, female, angled, 25 Poles, turned solder pins, board-locks and clinch nuts	Ma?Mstab/ Scale 1.5:1
						Insp.	12/01/12	JB			
			36283	12/01/12	SD	Stand.					
09643147233	M3		33416	19/01/06	JMDR	HARTING EURL F-95972 Paris				TB 0964314723x	Blatt/ Page 1/4
09643147232	UNC 4-40		31058	8-JUL-02	CV						
Part number	Nut thread		Mod.	Dat.	Name					Sub.	