


AMP Signal Double Lock

TE Internal #: 316088-1 Housing, Plug, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, AMP Signal Double Lock

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

STD Temp Signal Double Lock Cap

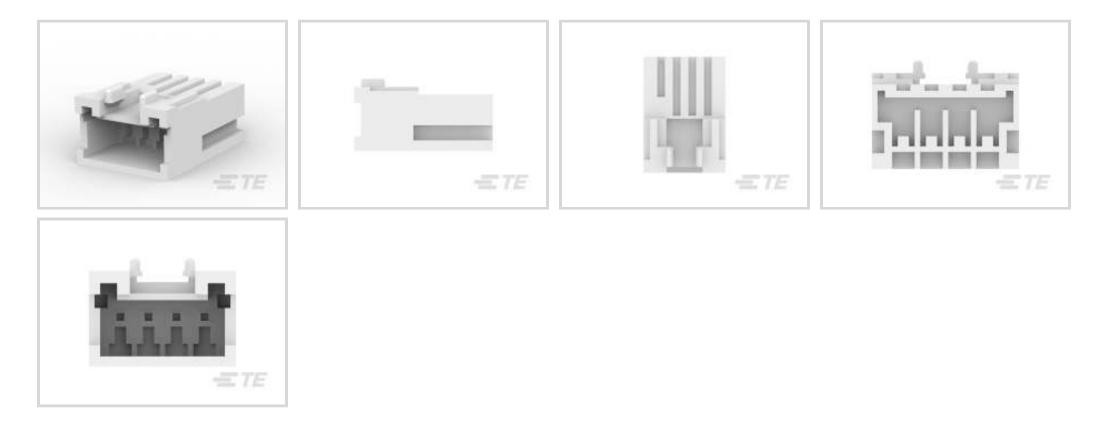

Connector Product Type: Housing Connector & Housing Type: Plug Connector System: Wire-to-Wire Number of Positions: 4

Centerline (Pitch): 2.5 mm [.098 in]

All STD Temp Signal Double Lock Cap (21)



Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	4
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	

Housing, Plug, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, AMP Signal Double Lock



Primary Product Color	Natural
Contact Features	
Contact Layout	Inline
Contact Type	Tab
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	3 A
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Nylon 66

Centerline (Pitch)	
--------------------	--

2.5 mm[.098 in]

Dimensions		
Connector Length	13.1 mm[.516 in]	
Connector Height	9.6 mm[.378 in]	
Wire Size	26 – 20 AWG	
Usage Conditions		
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Glow Wire Rating	Standard Part - Not Glow Wire	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	200	

Housing, Plug, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, AMP Signal Double Lock



Packaging Method

Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Not applicable for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Housing, Plug, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, AMP Signal Double Lock





Also in the Series AMP Signal Double Lock



Rectangular Caps & Covers(1)	Rectangular Connector Housings(23)	Rectangular Connector Locking(2)	Rectangular Connector Seals(10)
			AND AND AND
Rectangular Power Connectors(3)	Standard Rectangular Connectors(1)	Wire-to-Board Connector Assemblies & Housings(76)	Wire-to-Board Connector Contacts(6)

Customers Also Bought



Housing, Plug, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, AMP Signal Double Lock





Documents

Product Drawings 2.5 SIGNAL D/LOCK CAP HSG 4P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_316088-1_K.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_316088-1_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_316088-1_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

1773458-3_2.5MM_SIGNAL_DOUBLE_LOCK_CONNECTORS

English

Product Environmental Compliance MD_316088-1_06062018822_dmtec

English

MD_316088-1_06062018822_dmtec

English

Agency Approvals CSA Certificate English CSA Certificate

English

Housing, Plug, Wire-to-Wire, 4 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, AMP Signal Double Lock

