

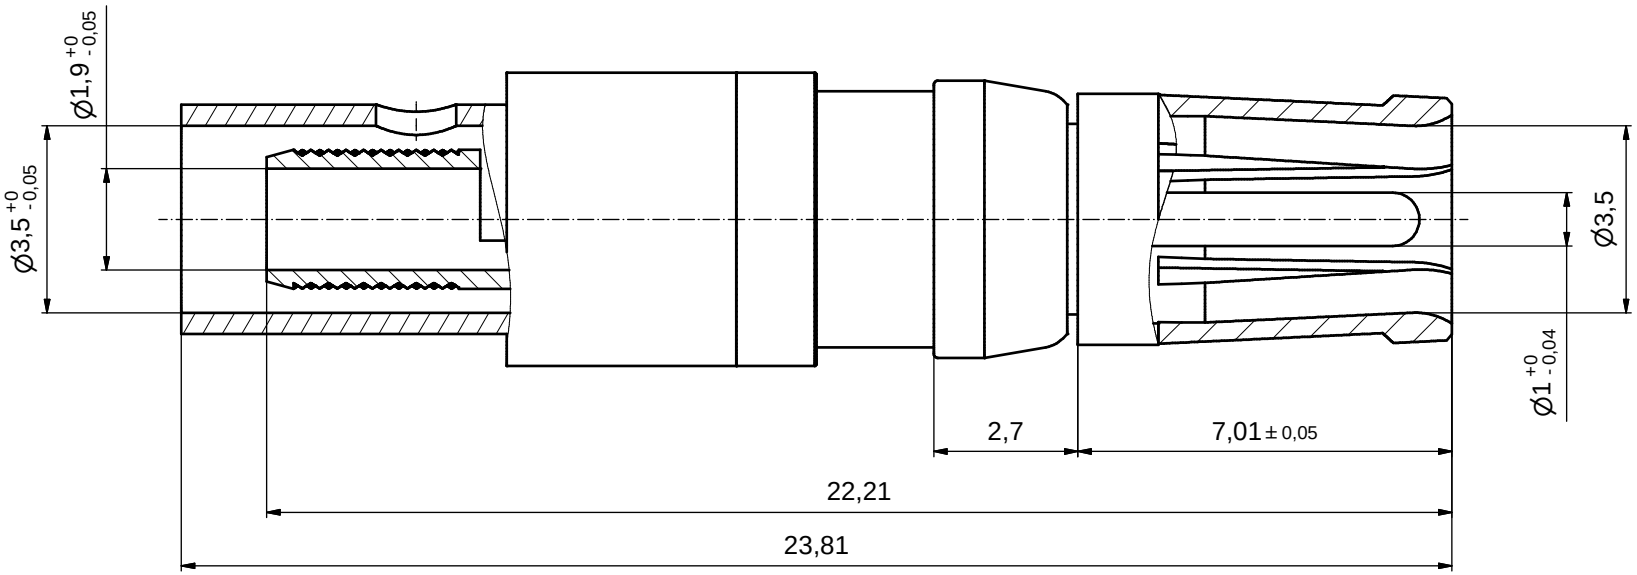

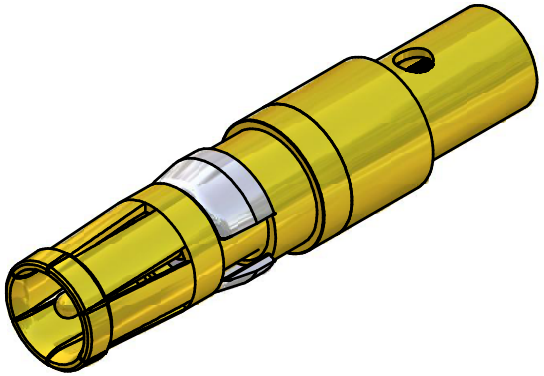

Directive 2002/95/EC „RoHS" Compliant

NOTES:
1. PLATING MATING SIDE.
   INNER CONDUCTOR: min. 50µin HARD GOLD over min. 50µin NICKEL
   OUTER CONDUCTOR: min. 30µin HARD GOLD over min. 50µin NICKEL
2. FOR CABLE S2

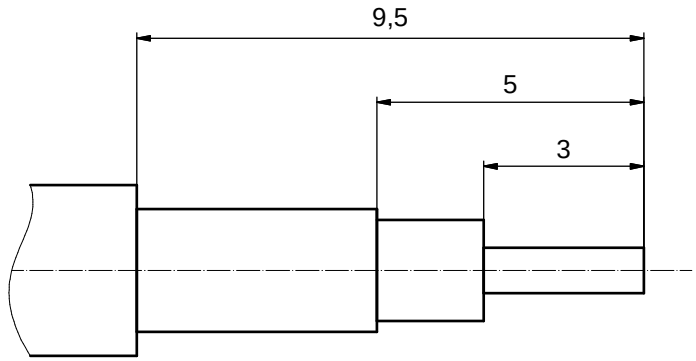

STRIPPING DIMENSIONS

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance: dim. in mm

	date	name
drawn	20.04.2009	Sonnenberg
appd.	20.04.2009	Fischer
norm		
d-old		

scale: 10:1 (5:1)

material:

title:
COAXIAL CONTACT FEMALE 50 OHM
inner conductor for solder termination
outer conductor for crimp or solder termination

dwg no: 13K2A031A | Inventor 10 | DIN-A3 | sh: 1

part no: 132J20059X