



C201367A Series



Hologen Free

1. Features of C201367A Series :

- 31.5 × 23.5mm Max.(L×W), 35.0mm Max. Height.
- Inductance range: 1.0mH~5.0mH, Custom values are welcomed.
- AC common mode noise filter for Power Supplies and Lighting Application.
- Rated Voltage: 250VAC.
- Dielectric strength:1500Vrms,winding to winding.
- UL 94 V-0 Material.
- Operating temperature: -40 to +125°C.
- RoHS & HF Compliant Components.




2. Electrical Characteristics of C201367A Series:

ITG Part Number	OCL ¹ (PIN1-4/2-3)	DCR (mΩ) Max. @25°C	I _{rated} ² (A) Max. @25°C	Dim. A (mm) Max.	Dim. B (mm) Max.	Dim. D (mm) Max.	Dim. E1 (mm) ±0.50	Dim. F (mm) Nom.	Fig
	(mH)								
	±30%								
C201367A-102NHF	1.00	8.00	12.00	31.50	23.50	30.00	17.50	Φ1.50	1
C201367A-152NHF	1.50	11.00	10.00	31.50	23.50	30.00	17.50	Φ1.30	1
C201367A-222NHF	2.20	14.00	9.00	30.50	21.00	35.00	15.00	Φ1.00	2
C201367A-332NHF	3.30	25.00	6.80	30.50	21.00	35.00	15.00	Φ1.00	2
C201367A-502NHF	5.00	45.00	5.00	30.50	21.00	35.00	15.00	Φ1.00	2

3. Mechanical Dimension of C201367A Series (Unit:mm):

A Max.	B Max.	C ±0.50	D Max.	E1 ±0.50	E2 ±0.50	F Nom.
See table above	See table above	5.00	See table above	See table above	25.00	See table above

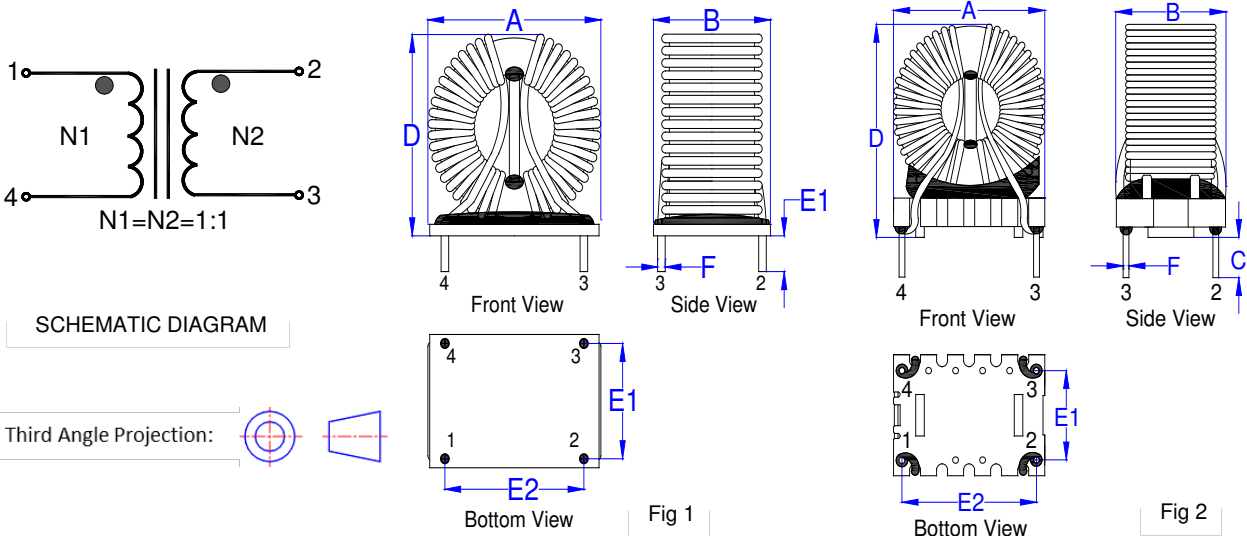

● New York 1 914 347 2474 ● Taipei 886 2 2698 8669 ● Kaohsiung 886 7 350 2275
 ● Japan 81 568 85 2830 ● Shenzhen 86 755 8418 6263 ● Shanghai 86 21 5424 5141 ● Hong Kong 852 9688 9767
 ● sales@ITG-Electronics.com ● www.ITG-Electronics.com Revision A.0: August 18, 2020

*Due to continuous product improvement, all specifications are subject to change without prior notice. Kindly contact an ITG field application engineer or a sales representative prior to purchase.



Notes:

1. Open Circuit Inductance (OCL) measured at 10KHz, 0.1mA @ 25°C.
2. Irated: Irated is defined as the applied current level that cause 40 °C temperature rise without force air flow.
3. Impedance measures with both windings in parallel and at ambient temperature(25°C).

4. Impedance vs Frequency Curve of C201367A Series :

