

EC4-20-NO2

Industrial Nitrogen Dioxide Sensor (Application : Portable Gas Detectors)

PERFORMANCE

Range	0 – 20 ppm
Maximum Overload	250 ppm
Sensitivity	450 to 750 nA/ppm NO ₂
Zero in Air at 20°C	< ±0.4 µA
Baseline Drift (-20°C to +40°C)	0 to -0.5 ppm equivalent
Resolution	0.1 ppm NO ₂
Linearity	Linear Across Range
Response time (T ₉₀)	< 30 seconds
Long-term Output Drift	< 2% signal/month
Warranty	1 year
Bias	No Bias

OPERATING CONDITIONS

Temperature Range	-20°C to +50°C
Operating Humidity	15 – 90% RH (non-condensing)
Pressure range	90 to 110 kPa
Operating Circuit	See Application Note 2
Storage life	6 months in original packing
Storage Temperature	0°C to 20°C
Expected Operating Life	2 years in air

PHYSICAL CHARACTERISTICS


Weight	5 g
Orientation Sensitivity	None
Dimensions	See Outline

SGX Europe Sp. z o.o. T: +48 (0) 32 438 4778 Building 11 Ligocka St. 103, 40-568 Katowice, Poland

E: sales.is@sgxsensortech.com www.sgxsensortech.com

OUTLINE

All Dimensions are in mm All tolerances are ±0.2mm

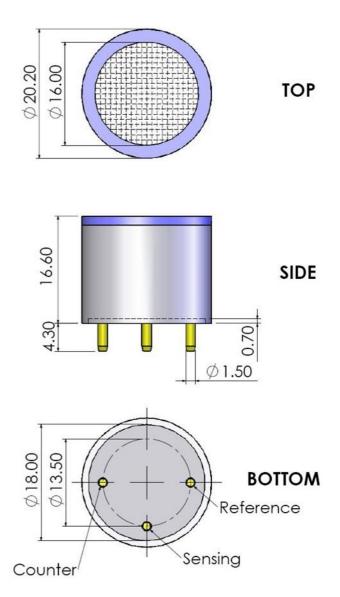

Whilst SGX has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. SGX accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of SGX products in accordance with information contained herein. In case of modification of the product, SGX disclaims all liability.

SGX Europe sp .z o.o. Poland REGON: 362332227



SGX Europe Sp. z o.o. Building 11 Ligocka St. 103, 40-568 Katowice, Poland

T: +48 (0) 32 438 4778

E: sales.is@sgxsensortech.com www.sgxsensortech.com

CROSS-SENSITIVITY DATA

GAS	CONCENTRATION (ppm)	OUTPUT SIGNAL (ppm NO ₂ equivalent)
Carbon Monoxide	300	0
Hydrogen Sulfide	15	-1.2
Sulfur Dioxide	5	-5
Nitric Oxide	35	0
Chlorine	1	-1

* See Important Notes

IMPORTANT NOTES

- 1.) Do not solder to the connector pins as this may damage the sensor and thereby invalidate the warranty.
- 2.) Details on recommended connector pins can be found in the Frequently Asked Questions within the Gas Sensor section of the SGX website.
- 3.) All performance specifications are based upon the following environmental conditions: 20°C, 50% relative humidity, 101kPa.
- 4.) Cross Sensitivity Data is for information only. Calibration is recommended with target gas as the accuracy of calibration and measurement cannot be ensured.
- 5.) The cross sensitivities are including but not limited to the gases stated in the table. It may respond to other gases.
- 6.) The cross sensitivities may fluctuate between ± 30% and may differ from batch to batch or across sensor's life time.
- 7.) The device is designed to be RoHS compliant.




SGX Europe Sp. z o.o. Building 11 Ligocka St. 103, 40-568 Katowice, Poland

T: +48 (0) 32 438 4778

E: sales.is@sgxsensortech.com www.sgxsensortech.com

TEMPERATURE

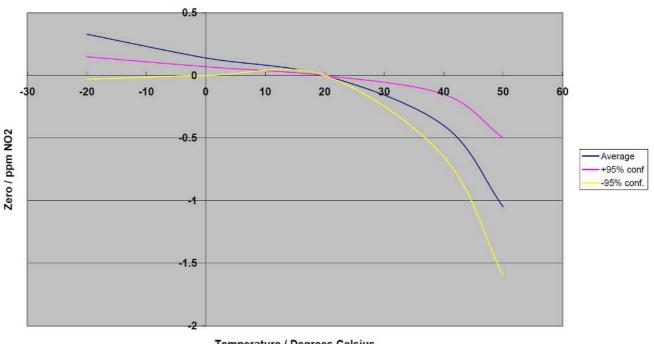

EC4-20-NO2 Graph of Zero vs Temperature

Temperature / Degrees Celsius

EC4-20-NO2 Graph of Sensitivity vs Temperature

