


# SARA-R510AWS module



## LTE-M AWS IoT ExpressLink module

### Designed to directly access AWS IoT Services securely over LTE-M

- Direct AWS IoT cloud access secured with hardware-based root of trust
- Optimized, easy-to-use AT command set for accelerated time-to-market
- Unburden the host processor from connectivity and cryptography tasks
- Access to AWS IoT Device and Fleet management and 200+ optional AWS services

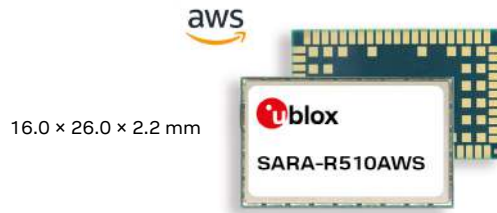

### Product description

The SARA-R510AWS is an AWS IoT ExpressLink module based on the u-blox UBX-R5 cellular chipset, aimed at fast and easy development of secure IoT devices.

By bridging the u-blox in-house chipset platform with the market-leading cloud computing services of AWS, this solution provides long-term availability and lifetime support from silicon-to-cloud.

The LTE-M module supports a comprehensive set of 3GPP Rel. 14 features that are relevant for IoT applications, like improvements to power consumption, coverage, data rate, mobility, and positioning. They are 5G-ready, meaning customers will be able to (software) upgrade their deployed devices, once 5G LTE has been fully rolled out by mobile operators, greatly improving end-product scalability and lifetime.

The embedded AWS IoT ExpressLink certified software provides a new tailored AT command set that paves the way to AWS cloud access straight out-of-the-box, which significantly accelerates time-to-market.

SARA-R510AWS provides AWS cloud service access without the need for the customer to integrate any additional API on their MCU; every single step is handled inside the IoT module. SARA-R510AWS is the perfect fit for new applications requiring accelerated time-to-market. It is also an ideal way to renew resource-constrained legacy applications that cannot accommodate the additional code and APIs that are usually required to access AWS cloud services.

SARA-R510AWS has been optimized for extremely low power consumption, using less than 0.5 µA of current in deep sleep mode, and is ideal for battery-powered applications. Combined with an internal, hardware-based secure element, a lightweight set of AT commands, and seamless access to AWS cloud, the solution protects your business-critical data from device to cloud without heavily investing in R&D resources to master provisioning, authentication, certification, and security.

SARA-R510AWS


	SARA-R510AWS
<b>Grade</b>	
Automotive	
Professional	•
Standard	
<b>Regions</b>	
	Multi-region
<b>Access technology</b>	
LTE bands	1, 2, 3, 4, 5, 8, 12, 13, 18, 19, 20, 25, 26, 28, 66, 71, 85
Data rate	M1
LTE Power class	23 dBm
<b>Compatible u-blox services</b>	
CellLocate®	☐
<b>Compatible AWS IoT services</b>	
Control	AWS IoT Core, AWS IoT Jobs, AWS IoT Device management, AWS IoT Device Defender, AWS IoT FleetWise
Analytics	AWS IoT Analytics, AWS IoT Events, AWS IoT SiteWise, AWS IoT TwinMaker
<b>Interfaces</b>	
UART	2
USB (for diagnostics)	1
USIM	1
<b>Features</b>	
Root of trust: secure element	•
Secure boot, updates, and production	•
MQTT *	•
Ultra low deep sleep	•
FW update via serial (FOAT)	☐
uFOTA	•
Host OTA	•

M1 = LTE Cat M1 (375 kbit/s DL, 1200 kbit/s UL)

\* = Protocol used by AWS IoT ExpressLink, not exposed.

☐ = Available in future FW version

# SARA-R510AWS module



## Features

LTE	<b>3GPP Release 13 LTE Cat M1</b> <b>3GPP Release 14 LTE Cat M1:</b> Coverage enhancement mode B, Uplink TBS of 2984b, Clot optimizations, and Release Assistance Indication (RAI) Cat M1 Half-duplex, 375 kbit/s DL, 1200 kbit/s UL
-----	--

## Compatible u-blox services

Location	CellLocate <sup>1</sup>
Security	Zero Touch Provisioning for AWS IoT ExpressLink

1 = Planned for future firmware

## Software features

Protocols <sup>2</sup>	Embedded TCP/IP Embedded MQTT Embedded TLS/DTLS
Firmware upgrade	Via UART uFOTA client/server solution (firmware upgrade over the air) AWS IoT ExpressLink Host OTA (firmware update of the host MCU)

2 = Protocols used by AWS IoT ExpressLink, not exposed.

## Interfaces

Serial	UART pre-configured with AWS IoT ExpressLink UART settings USB for diagnostics
(U)SIM	Supports 1.8 V and 3.0 V

## Package

96 pin LGA: 16.0 x 26.0 x 2.2 mm, < 3 g

## Environmental data, quality & reliability

Operating temperature -40 °C to +85 °C

RoHS compliant (lead-free)

Qualification according to AEC-Q104

Manufactured in ISO/TS 16949 certified production sites

## Certifications and approvals

SARA-R5 series FCC, ISED, PTCRB, Verizon, AT&T

SARA-R5 series AWS IoT Core qualified  
AWS IoT ExpressLink qualified

## Electrical data

Power supply 3.8 V nominal, range 3.0 V to 4.5 V

Deep sleep current consumption 0.5 µA

eDRX current consumption 180 µA

LTE Cat M1 195 mA (at 23 dBm)

Connected mode current consumption

## Support products

EVK-R510AWS Evaluation kit for SARA-R510AWS

## Product variants

SARA-R510AWS Secure LTE-M AWS IoT ExpressLink module for multi-regional use with ultra low power deep sleep mode

## Further information

For contact information, see [www.u-blox.com/contact-u-blox](http://www.u-blox.com/contact-u-blox).

For more product details and ordering information, see the [product data sheet](#).

## Legal Notice:

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, or modification of this document or any part thereof is only permitted with the express written permission of u-blox. Disclosure to third parties is permitted for clearly public documents only.

The information contained herein is provided "as is". No warranty of any kind, either express or implied, is made in relation to the accuracy, reliability, fitness for a particular purpose, or content of this document. This document may be revised by u-blox at any time. For most recent documents, please visit [www.u-blox.com](http://www.u-blox.com).