

Voltage Variable Attenuator

5.8 - 16 GHz



MAAT-010521-L1

Rev. V5

Features

- 5.8 - 16 GHz Frequency Range
- 2.0 dB Insertion Loss @ 10 GHz
- >30 dB Attenuation Range
- High Linearity, 30 dBm IIP3
- Lead-Free 3 mm, 16-Lead QFN Package
- RoHS* Compliant

Applications


- Cellular

Description

The MAAT-010521-L1 is a voltage variable attenuator with analog control and >30 dB of attenuation. Excellent linearity is maintained over the full attenuation range. The attenuation level is set by two control voltages of 0 to -2 V. This device is assembled in a lead free 3 mm 16 lead PQFN plastic package.

Applications include transceivers for cellular infrastructure.

Functional Block Diagram

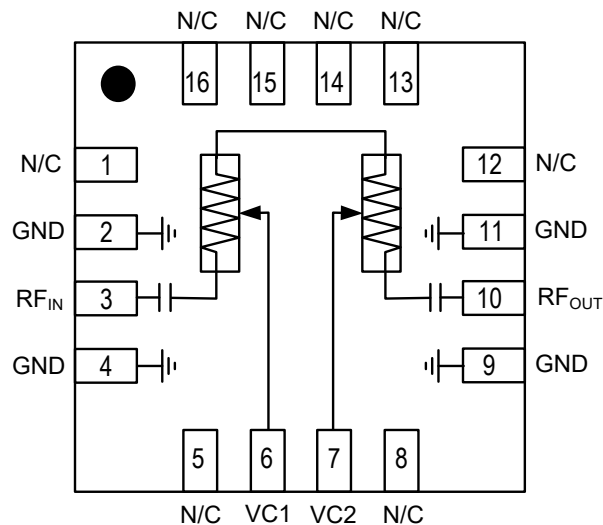

Pin Configuration^{1,2}

Pin #	Function
1, 5, 8, 12 - 16	No Connection
2, 4, 9, 11	Ground
3	RF Input
6	V _{C1}
7	V _{C2}
10	RF Output

1. It is recommended to connect No Connection (N/C) pins to ground.
2. The exposed pad centered on the package bottom must be connected to RF, DC and thermal ground.

Ordering Information

Part Number	Package
MAAT-010521-L1TR05	500 Part Reel
MAAT-010521-L1TR1K	1000 Part Reel
MAAT-010521-L1BSMB	Sample Board

* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

Voltage Variable Attenuator

5.8 - 16 GHz



MAAT-010521-L1

Rev. V5

Electrical Specifications: $T_A = +25^\circ\text{C}$, $Z_0 = 50 \Omega$, $P_{IN} = -10 \text{ dBm}$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss ($V_{C1} = V_{C2} = -2 \text{ V}$)	5.8 - 7.1 GHz 7.1 - 8.5 GHz 10.0 - 12.0 GHz 12.7 - 15.4 GHz	dB	—	2.0 1.8 2.0 2.4	4.0
Attenuation ($V_{C1} = V_{C2} = 0 \text{ V}$) ³	5.8 - 7.1 GHz 7.1 - 8.5 GHz 10.0 - 12.0 GHz 12.7 - 15.4 GHz	dB	—	26.0 28.0 33.5 37.0	—
Dynamic Range	5.8 - 7.1 GHz 7.1 - 8.5 GHz 10.0 - 12.0 GHz 12.7 - 15.4 GHz	dB	— — — 31.8	24.0 26.0 32.5 35.0	—
Input P1dB ⁴	5.8 - 15.4 GHz	dBm	20.0	23.0	—
IIP3	$P_{IN} = 10 \text{ dBm/tone @ } 5.8 - 15.4 \text{ GHz}$ $V_{C1} = 0 \text{ V} \ \& \ V_{C2} > -0.8 \text{ V}$ $V_{C1} \leq 0 \text{ V} \ \& \ V_{C2} \leq -0.8 \text{ V}$ $V_{C1} = V_{C2} = -2 \text{ V}$	dBm	27.8 29.0 32.0	29.0 30.5 38.0	—
Input Return Loss	—	dB	—	10.0	—
Output Return Loss	—	dB	—	10.0	—

3. To increase attenuation from minimum attenuation state ($V_{C1} = -2 \text{ V}$ and $V_{C2} = -2 \text{ V}$) to maximum attenuation state ($V_{C1} = 0 \text{ V}$ and $V_{C2} = 0 \text{ V}$), V_{C1} increases to full range prior to adjusting V_{C2} . Typical attenuation measured on MACOM Sample Board in state : $V_{C1} = 0 \text{ V} \ \& \ V_{C2} = -0.8 \text{ V}$ is 20.5 dB for 12.7 - 15.4 GHz band.
4. Guaranteed on MACOM Sample Board only.

Absolute Maximum Ratings^{5,6}

Parameter	Absolute Maximum
Input Power	30 dBm
Voltage (RF pins)	30 V
Voltage (control pins)	+1 V to -6 V
Storage Temperature	-55°C to +150°C
Case Temperature	-40°C to +85°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. MACOM does not recommend sustained operation near these survivability limits.

Handling Procedures

The following precautions should be observed to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1A devices.

Voltage Variable Attenuator

5.8 - 16 GHz




MAAT-010521-L1


Rev. V5

Typical Performance Curves: @ +25°C



Gain

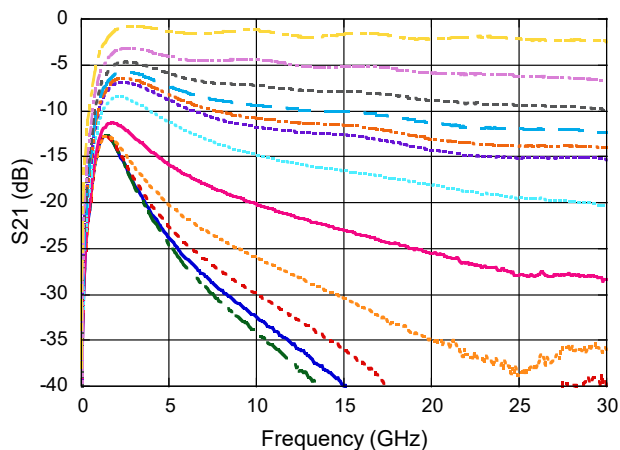


Input Return Loss

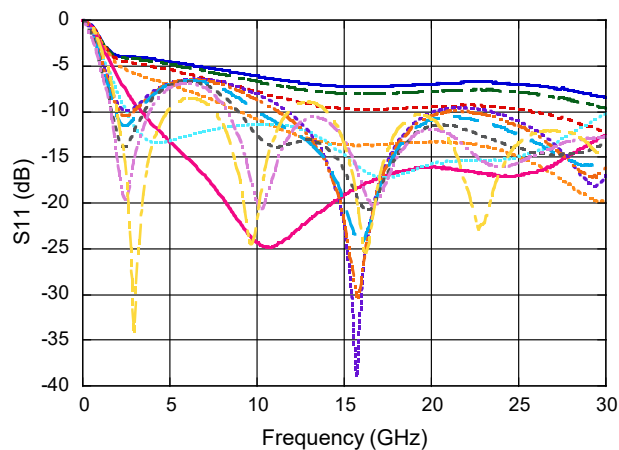

Output Return Loss

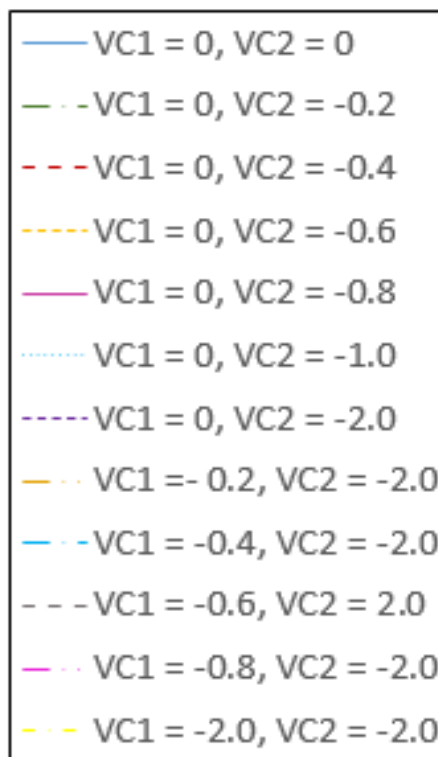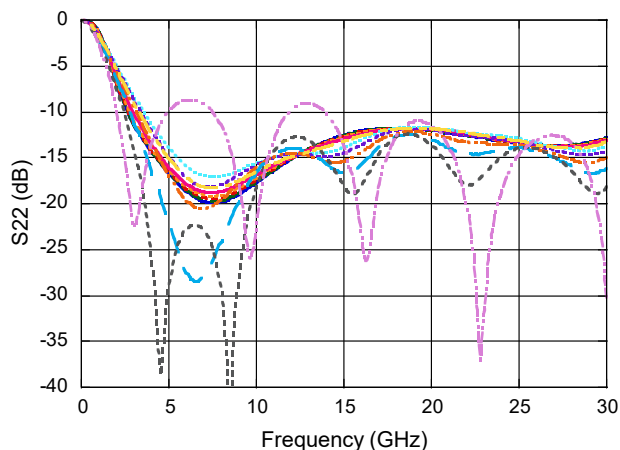

Dynamic Range

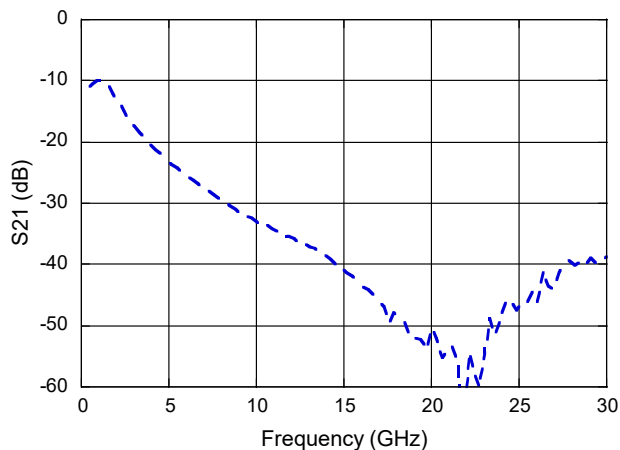

Voltage Variable Attenuator

5.8 - 16 GHz




MAAT-010521-L1


Rev. V5

Typical Performance Curves: S-Parameters @ +25°C


S-Parameters $V_{C1} = -2.0$ V, $V_{C2} = -2.0$ V

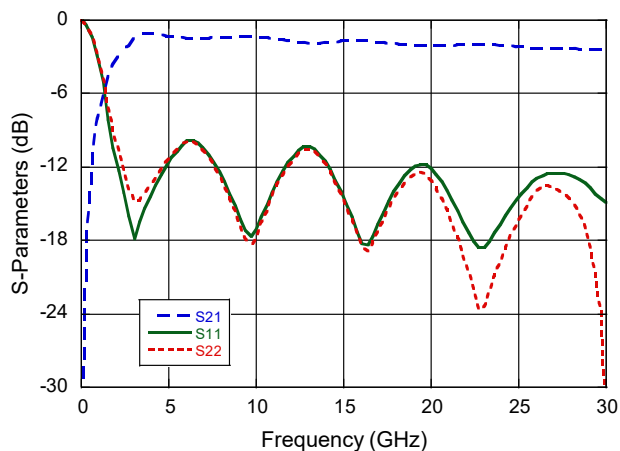


S-Parameters $V_{C1} = -0.6$ V, $V_{C2} = -2.0$ V

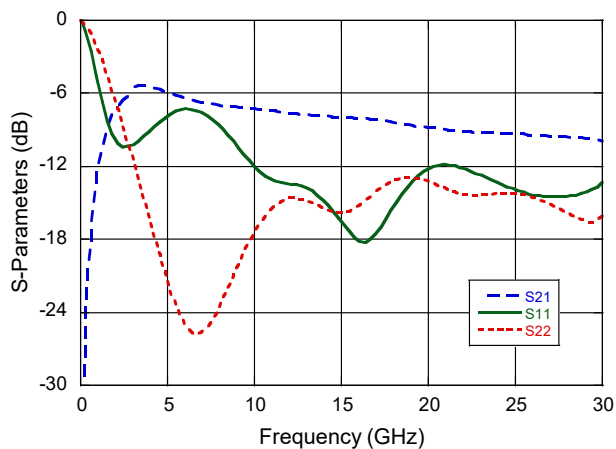


S-Parameters $V_{C1} = -0.4$ V, $V_{C2} = -2.0$ V

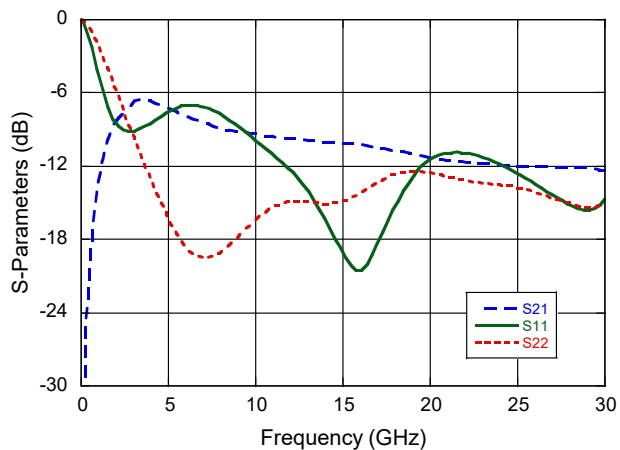

S-Parameters $V_{C1} = -0.2$ V, $V_{C2} = -2.0$ V

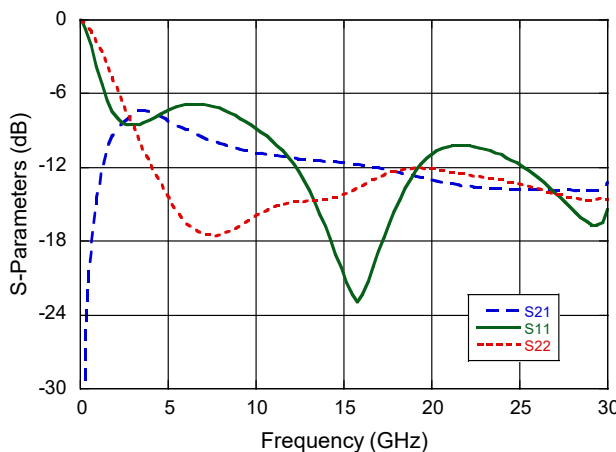

S-Parameters $V_{C1} = 0$ V, $V_{C2} = -0.6$ V

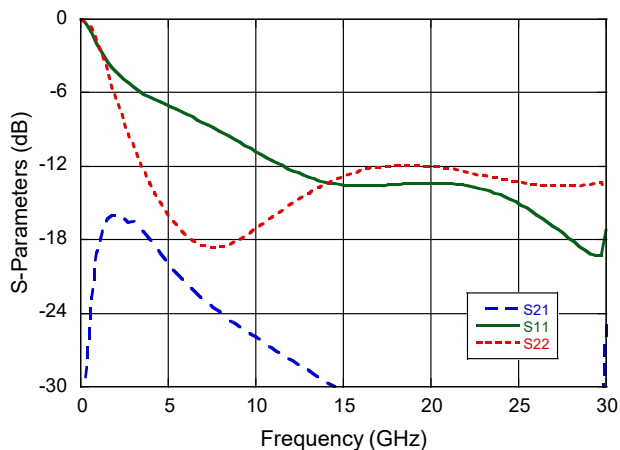

Voltage Variable Attenuator

5.8 - 16 GHz




MAAT-010521-L1


Rev. V5

Typical Performance Curves: Power Gain @ +25°C


Power Gain @ $V_{C1} = -2.0\text{ V}$, $V_{C2} = -2.0\text{ V}$

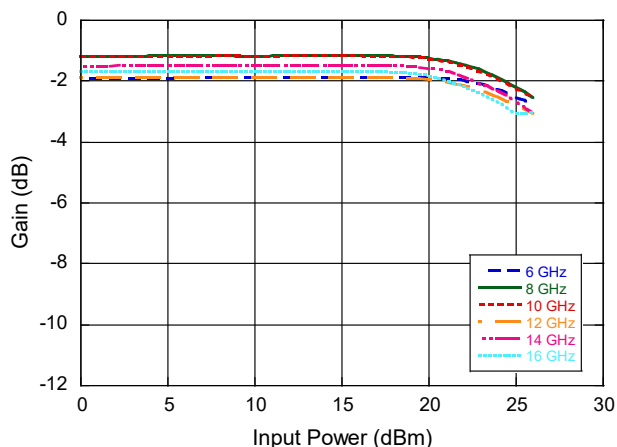


Power Gain @ $V_{C1} = 0\text{ V}$, $V_{C2} = -2.0\text{ V}$

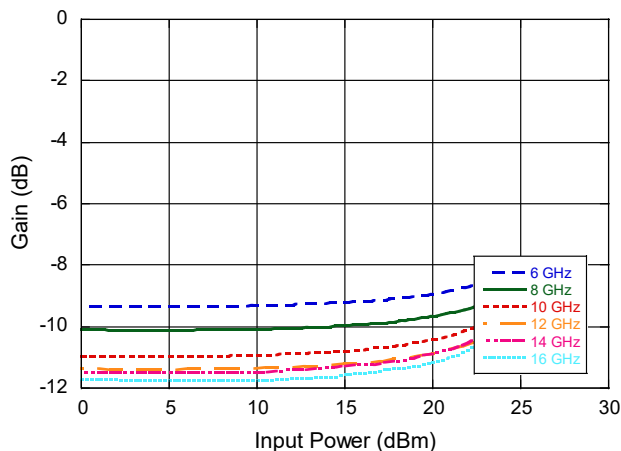


Power Gain @ $V_{C1} = -0.4\text{ V}$, $V_{C2} = -2.0\text{ V}$

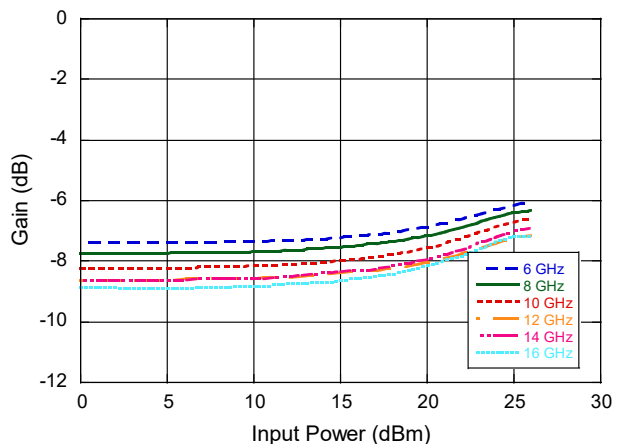

Power Gain @ $V_{C1} = 0\text{ V}$, $V_{C2} = -0.6\text{ V}$

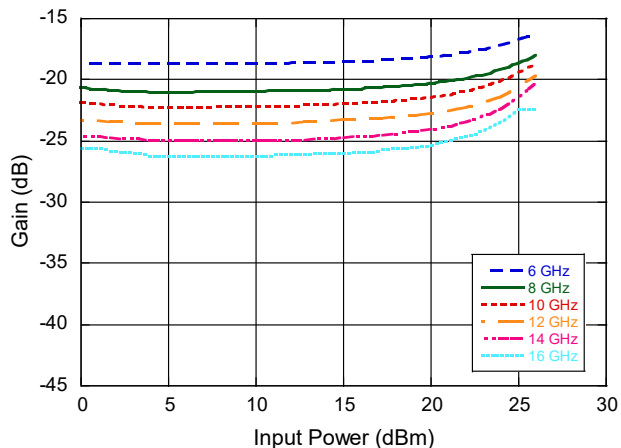


Power Gain @ $V_{C1} = 0\text{ V}$, $V_{C2} = 0\text{ V}$

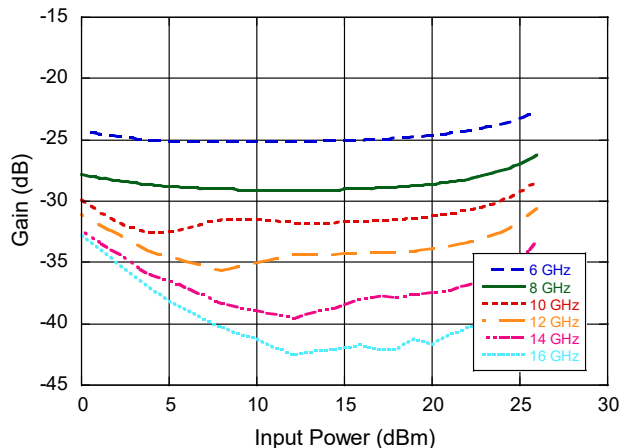


Typical Performance Curves: Input IP3


Input IP3 vs. Frequency
 @ $V_{C1} = -2.0\text{ V}$, $V_{C2} = -2.0\text{ V}$

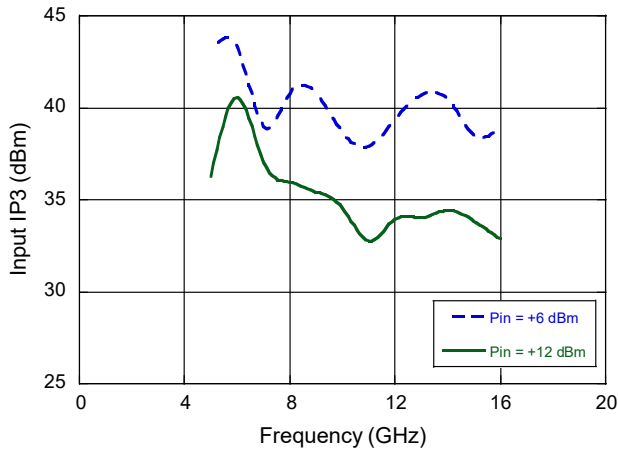


Input IP3 vs. SCL Input Power
 @ $V_{C1} = -2.0\text{ V}$, $V_{C2} = -2.0\text{ V}$

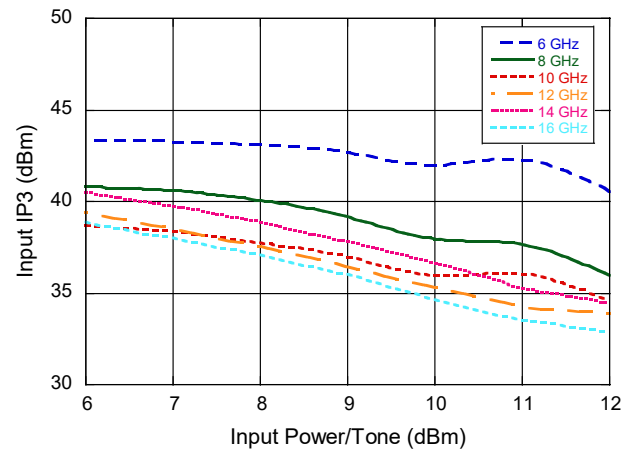

Input IP3 vs. Attenuation, SCL $P_{IN} = 6\text{ dBm}$

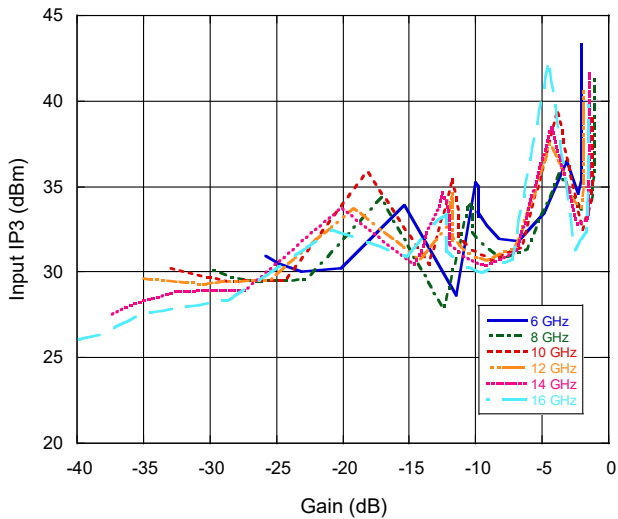

Input IP3 vs. Attenuation, SCL $P_{IN} = 12\text{ dBm}$

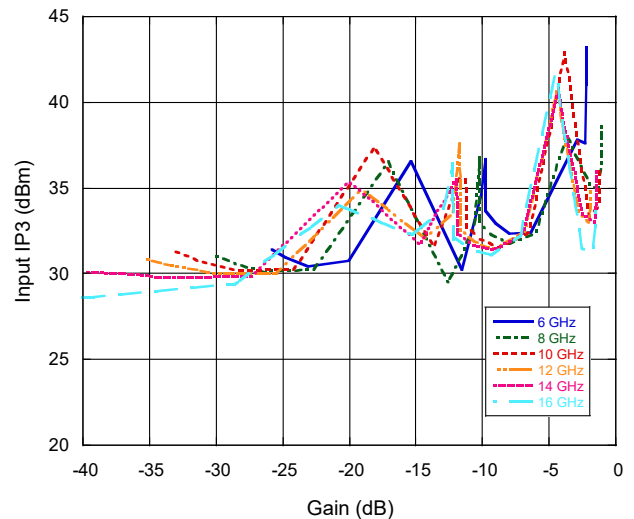

Voltage Variable Attenuator


5.8 - 16 GHz



MAAT-010521-L1

Rev. V5

Lead-Free 3 mm 16-Lead PQFN[†]

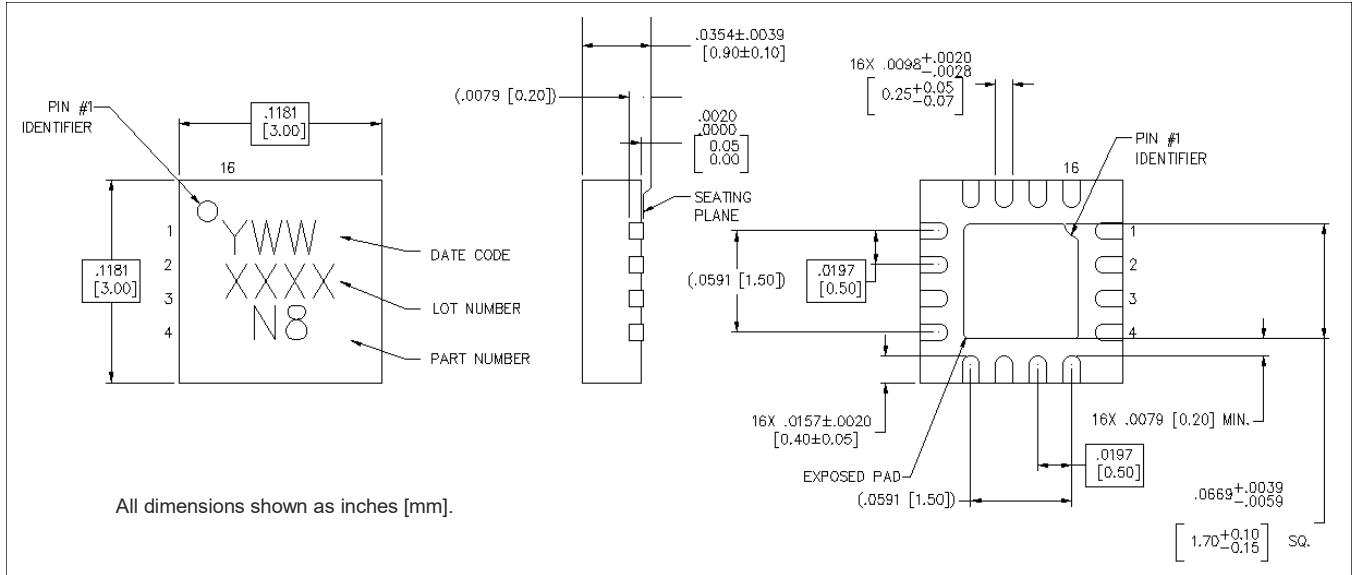

[†] Reference Application Note S2083 for lead-free solder reflow recommendations.
 Meets JEDEC moisture sensitivity level 1 requirements.
 Plating is NiPdAuAg.

Voltage Variable Attenuator

5.8 - 16 GHz



MAAT-010521-L1

Rev. V5

MACOM Technology Solutions Inc. ("MACOM"). All rights reserved.

These materials are provided in connection with MACOM's products as a service to its customers and may be used for informational purposes only. Except as provided in its Terms and Conditions of Sale or any separate agreement, MACOM assumes no liability or responsibility whatsoever, including for (i) errors or omissions in these materials; (ii) failure to update these materials; or (iii) conflicts or incompatibilities arising from future changes to specifications and product descriptions, which MACOM may make at any time, without notice. These materials grant no license, express or implied, to any intellectual property rights.

THESE MATERIALS ARE PROVIDED "AS IS" WITH NO WARRANTY OR LIABILITY, EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHT, ACCURACY OR COMPLETENESS, OR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.