

REV. A
DCO 144520

COIL: @ 25°C	
RESISTANCE	650 OHMS ± 10
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	9.5 VDC
MUST RELEASE	5.6 VDC MAX, 1.0 VDC MIN.


ENVIRONMENT:	
VIBRATION	10 Hz TO 3000 Hz @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.
STABILIZATION 2.5 MS MAX.

CUST. QPL
CUST. NO. M39016/13-077P REV.

TE NUMBER
2-1617073-3

CUSTOMER DATA SHEET

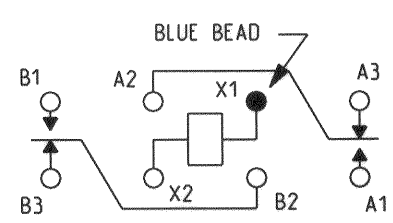

TERMINAL VIEW

CONTACT RATING:	LOW LEVEL TO
	2 AMPS 28 VDC RESISTIVE
	50,000 OPERATIONS

DR. B.D. 11SEP2008 CK. *[Signature]* 2/11/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CII PART NUMBER
3SBC 2022A2