

REV.	DATE	DESCRIPTION
01	Jul.01,16	1st RELEASE

**SPECIFICATIONS:**

**MATERIAL:**

INSULATOR: GLASS-REINFORCED THERMOPLASTIC, UL94V-0,  
 COLOR: BLACK  
 CONTACTS: PHOSPHOR BRONZE

**PLATING:**

CONTACT AREA: 15u" GOLD PLATING  
 SOLDER TAILS: 3u" GOLD FLASH OVER 50u" NICKEL PLATE.

**ELECTRICAL:**

VOLTAGE RATING: 120 VAC MAX.  
 CURRENT RATING: 0.5 AMP.  
 CONTACT RESISTANCE: 35 MILLIOHMS MAX.  
 INSULATION RESISTANCE: 500 MOHMS MIN.  
 DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC/MINIMUM.


**ENVIRONMENTAL:**

OPERATING TEMPERATURE: -55°~+85°


**UNSPECIFIED TOLERANCE:**


.XXX ±0.10[0.004]  
 .XX ±0.20[0.008]  
 .X ±0.30[0.012]

KSFP-N-SSM0-2007

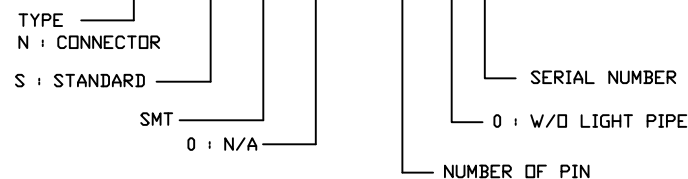

PART NO		KSFP-N-SSM0-2007		
TITLE	SFP CONNECTOR 0.80mm CERTER, 20 PIN SMT TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	DANIEL	RYAN	Jul.01,16	1 of 2

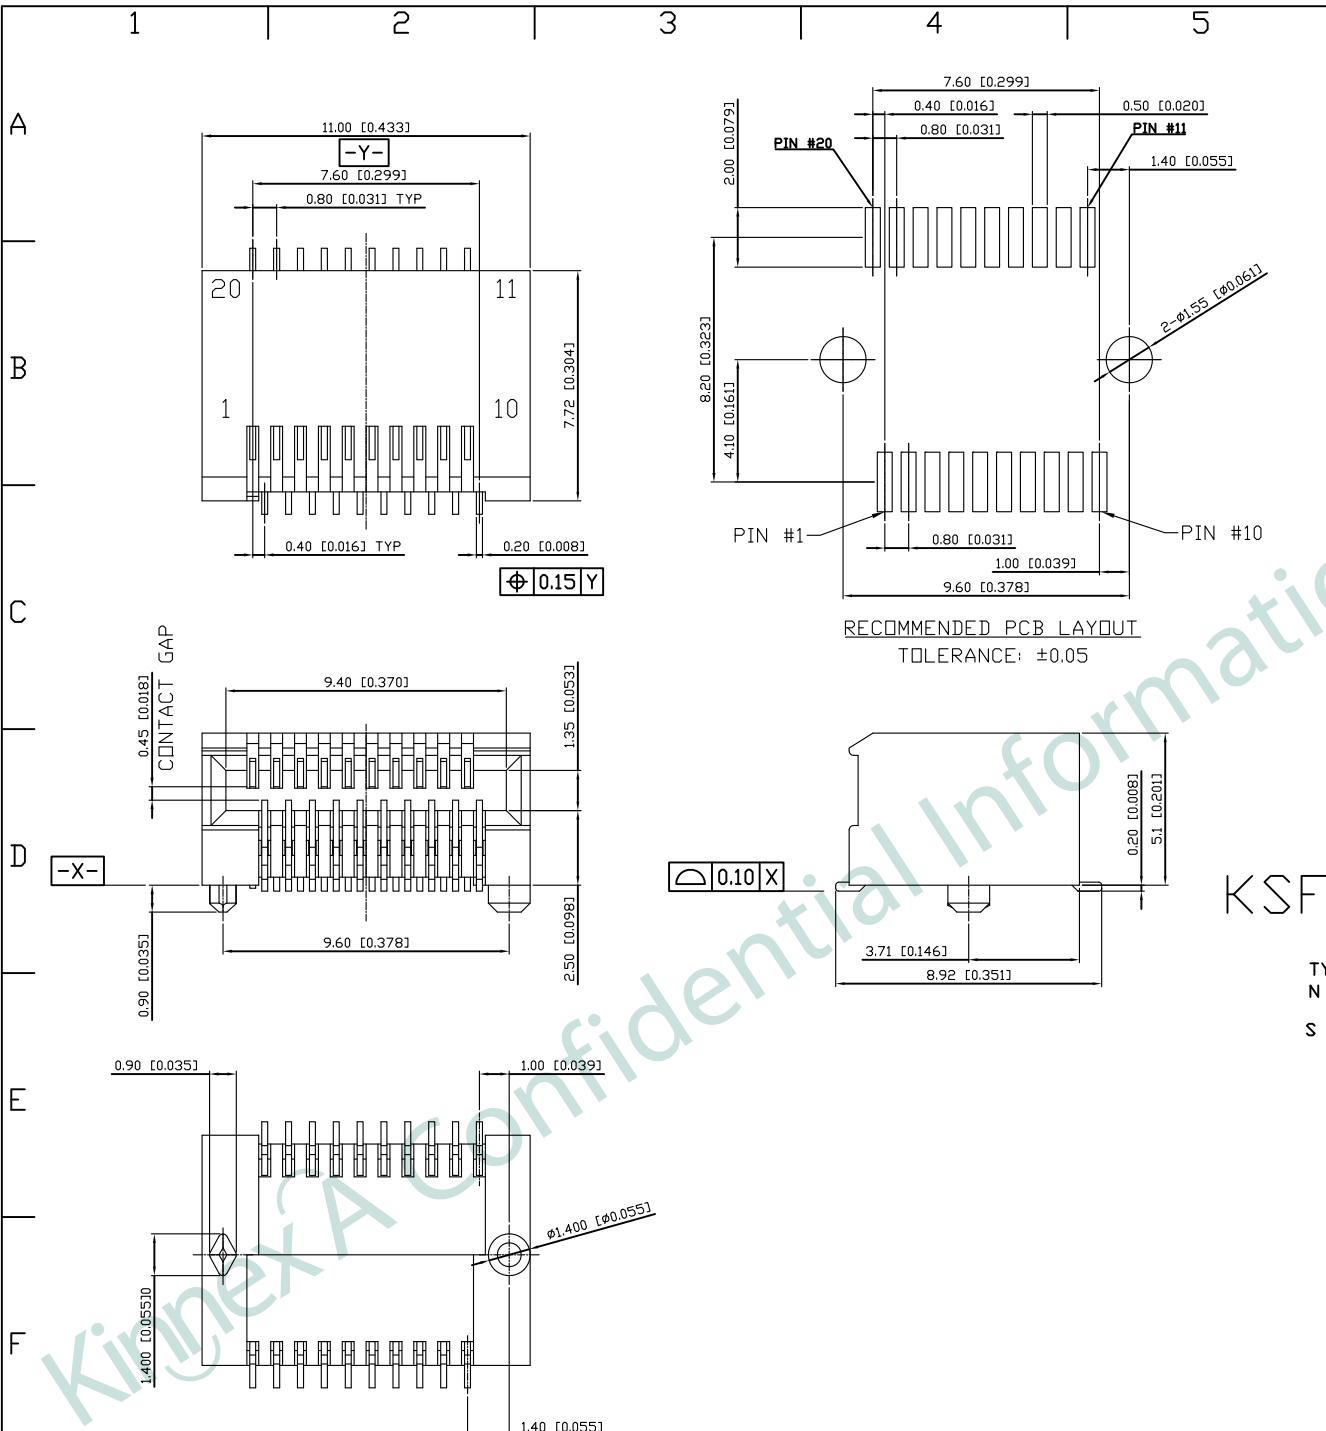

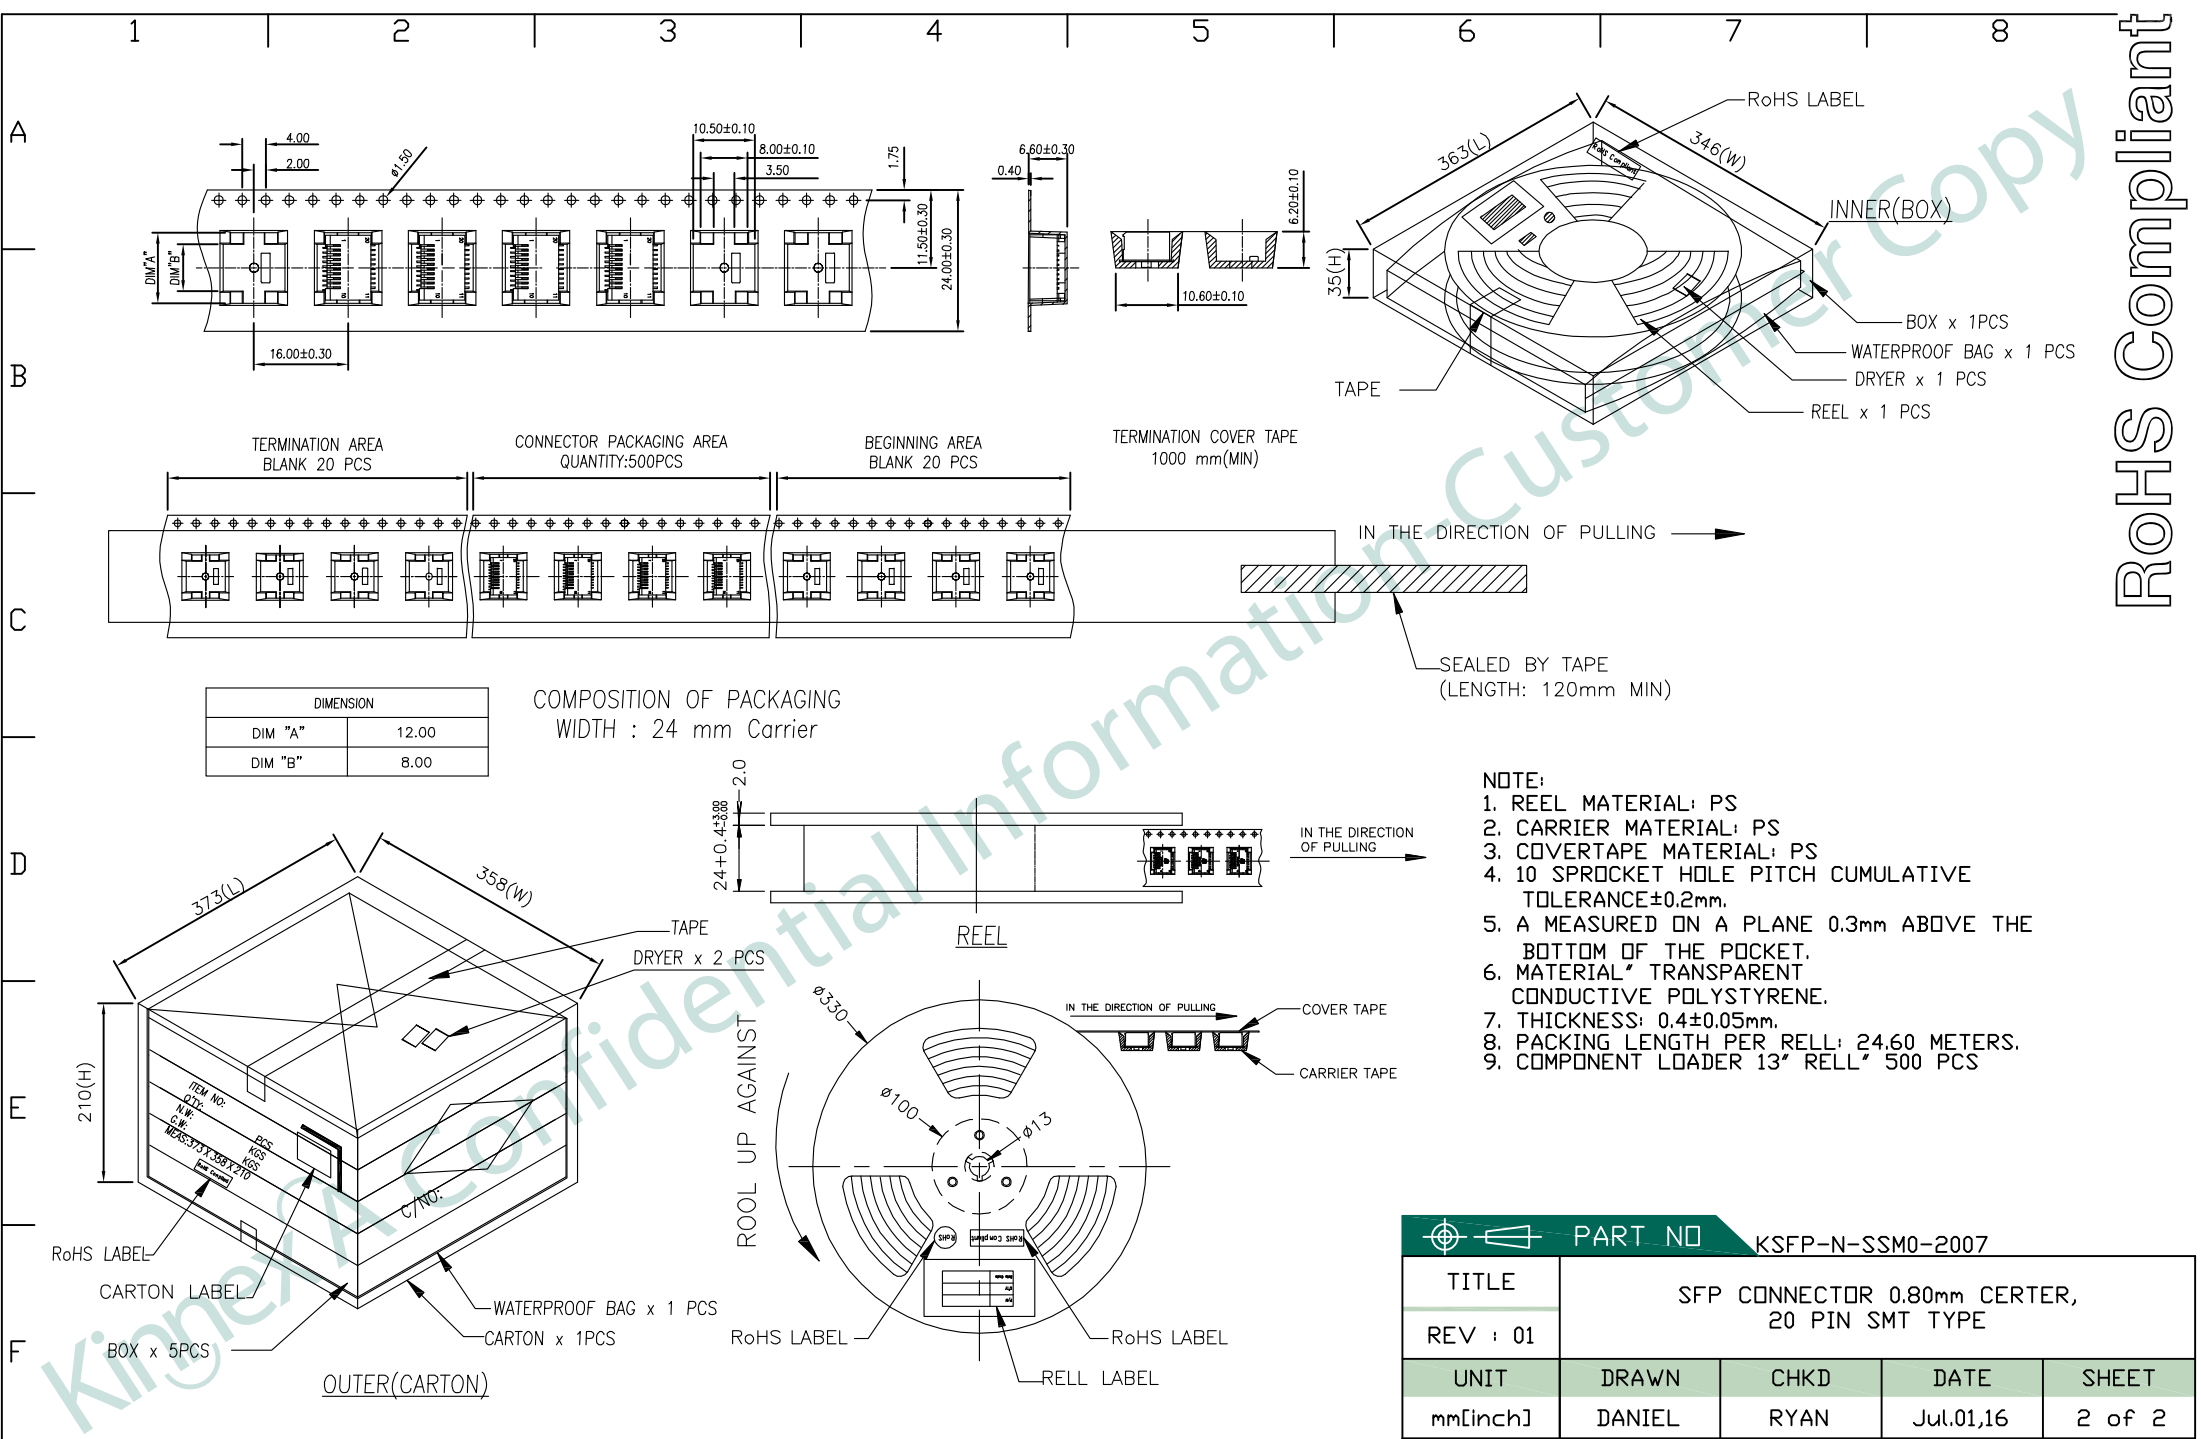

PART NO		KSFP-N-SSM0-2007		
TITLE	SFP CONNECTOR 0.80mm CERTER, 20 PIN SMT TYPE			
REV : 01				
UNIT	DRAWN	CHKD	DATE	SHEET
mm[inch]	DANIEL	RYAN	Jul.01,16	2 of 2