

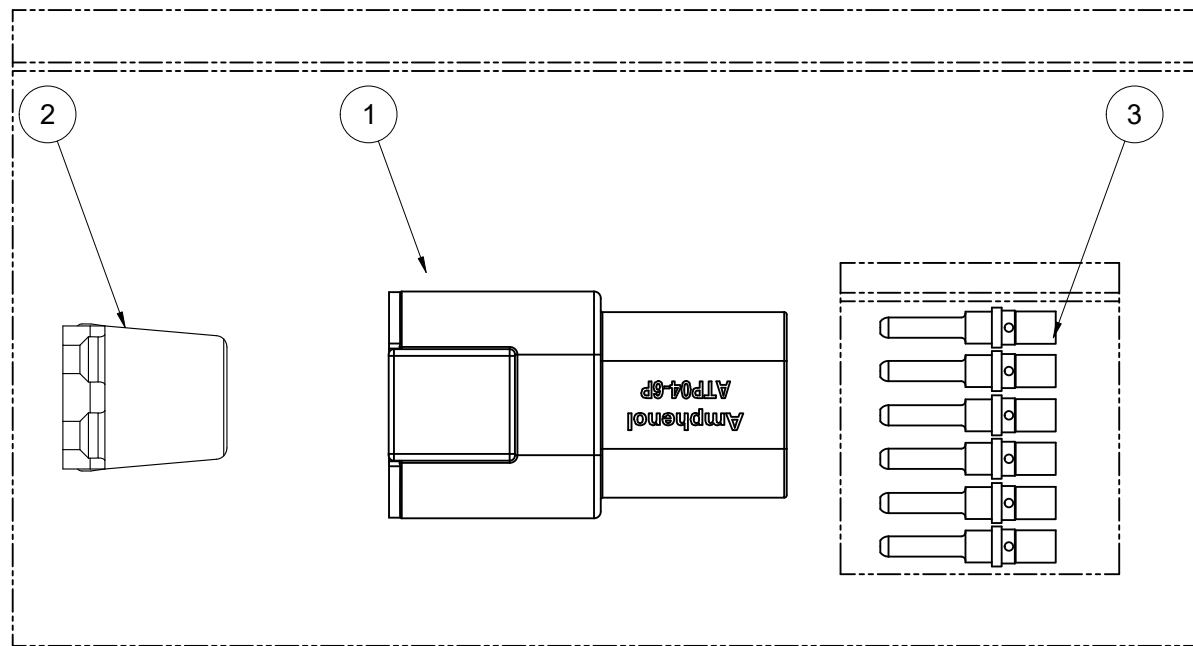
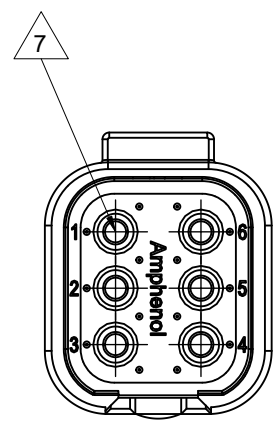


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A	-	RELEASE	3/3/2021	RO	WS

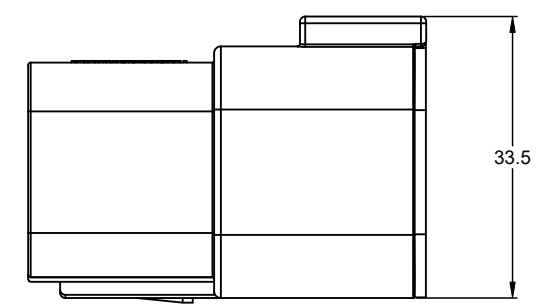

KIT CONTENTS

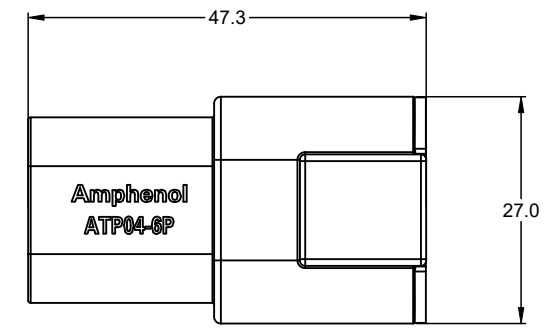

REFERENCE DIMENSIONS - ASSEMBLED RECEPTACLE

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
HOUSING: THERMOPLASTIC; COLOR: GREY
WEDGELOCK: THERMOPLASTIC; COLOR: ORANGE
SEALS: SILICONE RUBBER
CONTACTS: COPPER ALLOY; NICKEL PLATED
2. SPECIFICATIONS:
2.1 CURRENT RATING: 25 AMPS
2.2 OPERATING TEMPERATURE: -55°C TO +125°C
2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 25 AMP TEST CURRENT.
2.6 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
2.7 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES

3. AVAILABLE HAND CRIMPER: CA-5D12
4. ALL COMPONENTS ARE RoHS COMPLIANT.
5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6. WIRE RANGE OF CONTACTS INCLUDED IN KIT: 12 - 14 AWG

7. MATING PART: ATP06-6S* PLUG

8. CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	TYPICAL WIRE RANGE
12	3.40 mm (.134 in)	4.95 mm (.195 in)	10 - 14 AWG

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
6	AT60-204-12141	CONTACT, PIN, SOLID, SIZE 12, 12 - 14 AWG	3
1	AWP-6P	P-WEDGELOCK, 6 POSITION, ATP SERIES	2
1	ATP04-6P	RECEPTACLE, 6 POSITION, ATP SERIES	1

MATERIALS LIST		
SIGNATURES	DATE	
DRAWN: RO	3/2/2021	Amphenol Sine Systems - www.amphenol-sine.com 44724 Morley Drive Clinton Township, MI 48036
CHECKED: WS	3/2/2021	
ENGINEER: RO		
APPROVAL: WS	3/2/2021	

PROCESS SPECIFICATIONS:	THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	SIZE	TYPE	DWG NO.	REVISION
NEXT ASSY:		C	C-	ATP04-6P-KIT01	A

TITLE: KIT, ATP SERIES, 6 POS RECEPTACLE, PIN CONTACTS, AND WEDGELOCK DWG NO: ATP04-6P-KIT01 REV: A SH: 1 OF: 1