
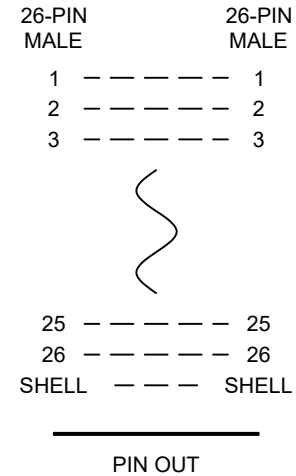
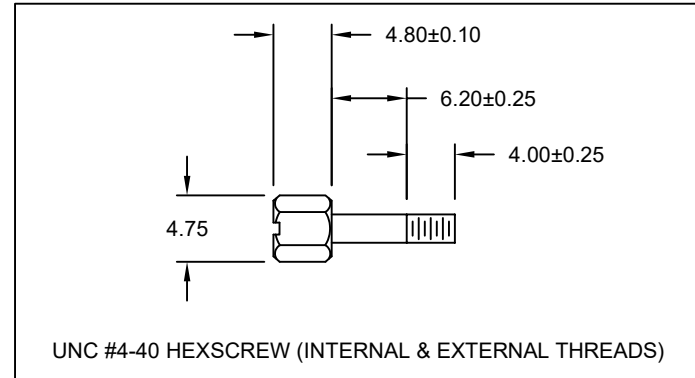
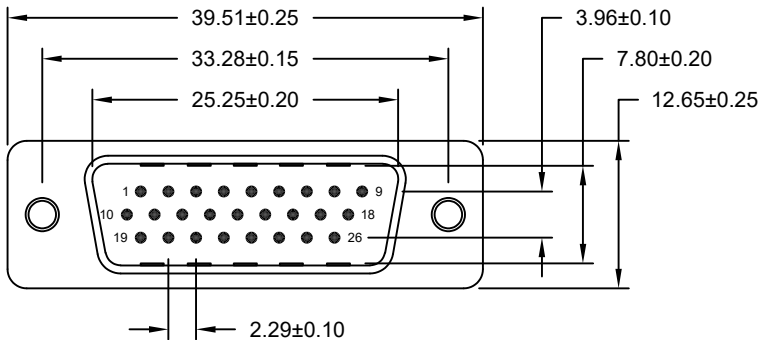
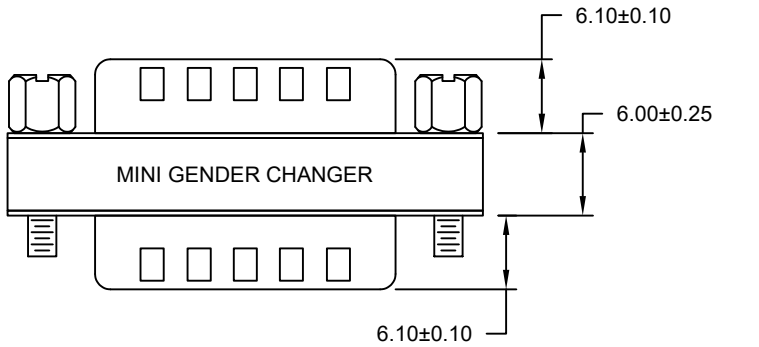


**SPECIFICATION:**

INSULATOR: PBT, UL 94 V-0  
 CONTACT: GOLD PLATED BRASS  
 SHELL: TIN PLATED STEEL  
 CURRENT RATING: 3 AMP  
 DIELECTRIC STRENGTH: 1,000VAC FOR 1 MINUTE  
 INSULATION RESISTANCE: 1,000 MOHMS MIN @500 VDC  
 TEMPERATURE: -55° C - +105° C

**NOTE:**

LABEL: YELLOW COLOR WITH BLACK CHARACTERS  
 SIDE 1: MINI GENDER CHANGER  
 SIDE 2: U.S.A. PATENT 5199906

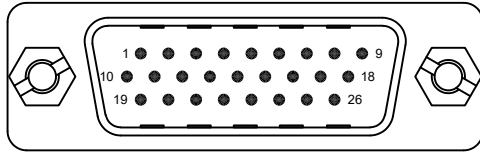

RoHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH  
 DATE: 10/15/2007



SCALE: NTS	SHEET 1 OF 1	REV 2
DWG NO. GCHDLP26M26M		