Datasheet revision 1.0 www.chipquik.com

# Co-Solvent Low Evaporating Flux Remover in 30ml (1.0oz) Squeeze Bottle w/tip

#### **Product Highlights**

Powerful Co-Solvent Flux Remover

Low Evaporating

Low Surface Tension to Clean Under Small Parts

Environmentally-Friendly Low Ozone Depletion, Low Toxicity RoHS 3 and REACH compliant

## **Specifications**

Boiling Point: 175-215 °C Flash Point: 77 °C Vapor Pressure: 0.1 kPa

Liquid Density:

Kinematic Viscosity:

Surface Tension:

Relative Evaporation Rate (RER):

Dielectric Strength (0.1" gap):

Global Warming Potential:

0.825 g/cm³ (at 20°C)

1.6 cSt (mm²/s)

14 mN/m

0.06 nBuAc-1

>25 kV

<25 GWP

Ozone Depletion Potential:

Color:

Clear

Miscibility in Water:


Net Weight:

Net Volume:

Not miscible
24.75g
30ml

Packaging: 30ml Squeeze Bottle

## **Co-solvent De-fluxing Process:**

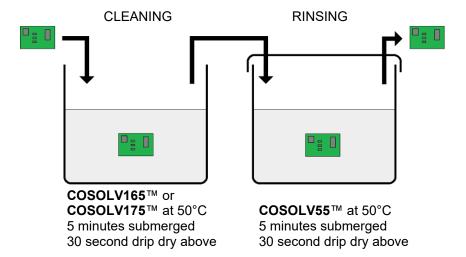

## **Storage and Handling**

Store refrigerated or at room temperature 3-25°C (37-77°F).

## **Transportation**

This product has no shipping restrictions. Shipping below 0°C (32°F) or above 25°C (77°F) for normal transit times by ground or air will not impact this product's stated shelf life.

## **Conforms to the following Industry Standards:**

RoHS 3 Directive (EU) 2015/863:

Yes