


Tool Specification

1. Part Number: YRS-125

2. Terminal: SYF-001T-P0.6

3. Application

Crimp Position	AWG UL1007	Tensile Strength N (kgf)	Strip Length mm
26	AWG 26	14.7(1.5) min.	2.5
24-22	AWG 24	19.6(2.0) min.	2.5
24-22	(AWG 22)	(34.3(3.5) min.)	2.5

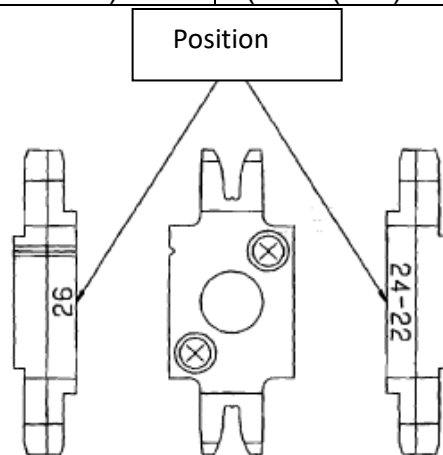

PART NUMBER	DESCRIPTION
YRS 7014-0418 CRIPMER ASSY	UPPER CRIPMER ASSEMBLY
YRS 7014-0485 ANVIL A	CONDUCTOR ANVIL
YRS 7014-0486 ANVIL B	INSULATION ANVIL
YRS 7014-0010 SHEAR BLADE	SHEAR BLADE

- Check the crimp appearance and tensile strength prior to use.
- Select the appropriate crimp position based on the wire size that will be used.
- The wire size in () above could cause excessive crimping. Check the tensile strength and crimp appearance to confirm an acceptable crimp.
- The insulation barrel is set for the type of wire listed and is not adjustable.