


# ELECTRO-ACOUSTIC TRANSDUCER BRT1206P-01 SERIES

## ■ FEATURES


Ultra thin ( $\phi 12 \times 5.4$ )

## ■ FREQUENCY RESPONSE

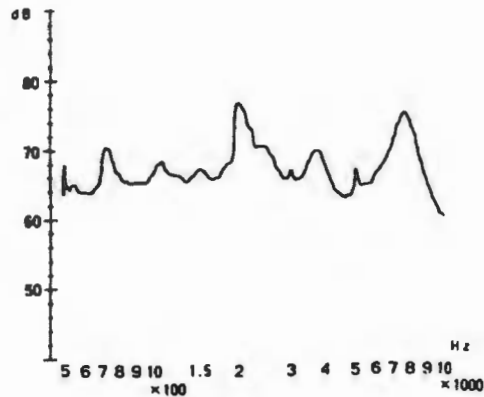

applied voltage : 1.5 V, 1/2 duty, square wave  
distance for measurement : 10 cm

## ■ DIMENSIONS

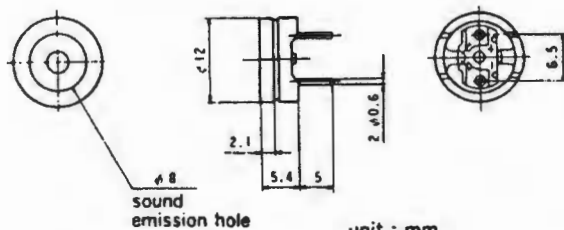

unit : mm  
housing material : NORYL SE1-J

SPECIFICATIONS	
TYPE	BRT1206P-01
RATED VOLTAGE (V)	1.5
OPERATING VOLTAGE (V)	1~2
*RATED CURRENT (mA)	MAX.10
COIL RESISTANCE (ohm)	$50 \pm 7.5$
**COIL IMPEDANCE (ohm)	140
*SOUND OUTPUT AT 10cm (dB)	MIN.70
RESONANT FREQUENCY (Hz)	2,048
OPERATING TEMPERATURE (C)	-20 ~ +60
STORAGE TEMPERATURE (C)	-30 ~ +70
WEIGHT (g)	2

\*Value applying rated voltage (2,048Hz, 1/2 duty, square wave)  
\*\*Value applying (2,048Hz, sine wave, measuring current 60 uA)  
Note: Lead wire type is available on request.

INTERVOX  
**International** ©

INTERNATIONAL COMPONENTS CORPORATION  
215 MCCORMICK DRIVE, BOHEMIA, NY 11716  
FAX: 631-952-9595 FAX: 631-952-9597

Title

Electro Acoustic Transducer

Intervox Model #

BRT1206P-01

Rev  
A

Scale

Date 1/25/91

Sheet 1 of 1