


PART NUMBER	REVISION	DESCRIPTION	FEED TYPE
2150037-2	F	FINE CRIMP HEIGHT ADJUST	PNEUMATIC
7-2150037-2	F	PNEUMATIC AND CRIMP TOOLING KIT	PNEUMATIC
7-2150037-7	A	CRIMP TOOLING KIT	-

ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER

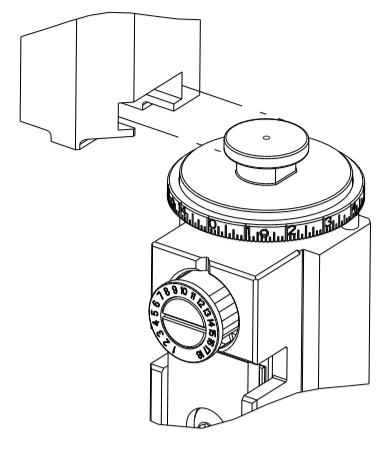

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.29 mm [.090]	F
INSUL	3.56 mm [.140]	F

APPLICATOR INSTRUCTIONS 408-35043

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: FASTIN-FASTON, .250 SERIES			
WIRE STRIP LENGTH		INSULATION DIAMETER RANGE	
5.21-5.97 mm [.205-.235 IN]		Ø2.16-3.18 mm [.085-.125 IN]	
TERMINAL APPLICATION SPECIFICATION	(A) 114-2025	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
(A) 60294-1	(A) 60294-2	(A) 62553-1	(A) 62553-3

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: FASTIN-FASTON, .250 SERIES			
WIRE STRIP LENGTH		INSULATION DIAMETER RANGE	
5.21-5.97 mm [.205-.235 IN]		Ø2.16-3.18 mm [.085-.125 IN]	
TERMINAL APPLICATION SPECIFICATION	(B) 114-20021	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
(B) 160691-1	(B) 160691-4	(B) 160691-7	
(B) 160691-2	(B) 160691-5	(B) 160645-1	
(B) 160691-3	(B) 160691-6	(B) 160645-2	

WIRE SIZE	CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING
18 AWG	1.35 +/- 0.05 [.053 +/- .002]	5.1
20 AWG	1.22 +/- 0.05 [.048 +/- .002]	6.7
22 AWG	1.17 +/- 0.05 [.046 +/- .002]	7.2

WIRE SIZE	CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING
18 AWG	1.32 +/- 0.05 [.052 +/- .002]	5.3
20 AWG	1.22 +/- 0.05 [.048 +/- .002]	6.7
22 AWG	1.14 +/- 0.05 [.045 +/- .002]	7.4

- RECOMMENDED SPARE PARTS
- REFER TO SUPPLIED INSTRUCTION SHEET FOR CLEANING, LUBRICATION AND STORAGE OF APPLICATOR.
- APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50
APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.
- 6. UNLESS SPECIFIED OTHERWISE TORQUE VALUES SHALL BE USED PER DOCUMENT, 101-35000.
- POSITION ITEM 51 TO FEED OFF THE INSULATION BARREL OF TERMINAL.
- TERMINAL LUBRICANT IS RECOMMENDED.

***WARNING**
ON INSTALLATION, SET WIRE DISC TO CRIMP HEIGHT REFERENCE SETTING FOR LARGEST WIRE SIZE. CRIMP HEIGHT REFERENCE SETTINGS GREATER THAN THE VALUE SHOWN MAY CAUSE DAMAGE TO THE CRIMP TOOLING. REFER TO THE INSTRUCTION SHEET FOR PROPER SETUP AND ADJUSTMENTS.

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

LOC	DIST	REV	DATE	BY	APPV
A	66	C	26SEP2018	TB	TE
		D	10JUN2019	LG	TE
		E	10DEC2019	FJ	TE
		F	30MAR2022	FZ	TE

QTY	LOC	DIST	REV	DATE	BY	APPV	DESCRIPTION	ITEM NO	
-	1	1					2119641-1	FEED CAM, AIR FEED	248
-	1	1					2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
-	1	1					2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
-	1	1					2119083-1	RETAINER, INSULATION DIAL	242
-	1	1					2844940-4	AIR FEED MODULE	238
-	1	1					1-18028-0	WASHER, FLAT, REG M8	192
-	1	1					6-993111-6	PIN, SLOTTED SPRING 3.0 X 14.0	177
-	1	1					8-22280-7	SPRING, COMPRESSION	176
-	1	1					1752353-2	GUIDE PIN,HOLDDOWN	175
-	1	1					1901680-2	GUIDE PIN,HOLDDOWN	174
-	REF	REF					994970-2	COUNTER, MAGNETIC	164
-	1	1					2119955-2	ASSY, LUBRICATOR, END FEED	84
-	1	1					455888-5	SPACER, CRIMPER	82
-	1	1					1803607-4	DOCUMENTATION PACKAGE	71
-	2	2					2-18032-2	SCR, SET, FLT PNT, M3 X 10.0	70
-	1	1					2119740-1	TAG, IDENTIFICATION	67
-	2	2					2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
-	1	1					1976052-1	HOLDDOWN, TERMINAL	65
-	1	1					2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	60
-	1	1					5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
-	4	4					2168400-4	SHCS, LOW HEAD, RoHS, M4 X 8	57
-	2	2					2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	56
-	2	2					5018030-1	NUT, HEX, REG, RoHS, M3	54
-	2	2					986965-8	NUT, LOCK, HEX, TORQUE (M4)	53
-	1	1					1-5018030-0	NUT, HEX, REG, RoHS, M3.5	52
-	1	1					2063961-9	FEED FINGER	51
-	1	1					1752354-3	STANDOFF, HOLD-DOWN	50
-	1	1					18023-9	SCR, SKT HD CAP M4 X 6.0	49
-	1	1					2119655-5	APPLICATOR BASIC ASSEMBLY, EF	46
-	1	1					1803517-1	RAM ASSEMBLY, EF ATLANTIC	44
-	1	1					1803602-1	SCR, BHSC, RoHS (M8 X 25)	41
-	8	8					1-18028-2	WASHER, FLAT, REG M4	33
-	2	2					2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	31
-	2	2					2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	29
-	1	1					240639-1	STRIPPER (MACHINING)	27
-	2	2					1-2168083-5	SCR, SKT HD CAP, RoHS, M4 X 30	25
-	1	1					1752371-5	PLATE, STRIP GUIDE	24
-	2	2					2-22281-3	SPRING, COMPRESSION	22
-	1	1					1803292-4	DRAG	20
-	1	1					1-1901696-8	STRIP GUIDE, REAR	19
-	1	1					1-1901695-8	STRIP GUIDE, FRONT	18
-	4	4					1-2079383-1	SCR, BHSC, RoHS (M6 X 12)	17
-	1	1					5-240641-8	SPACER	16
-	1	1					1752360-1	SPACER, HOLD-DOWN	13
-	1	1					240644-1	PLATE, REAR SHEAR	11
-	-	-					-	-	10
-	1	1					690482-3	PLATE, FRONT SHEAR	9
-	1	2	1				1338673-6	ANVIL, COMBINATION	8
-	1	1					1-2217206-3	BLADE, SLUG	7
-	1	1					7-240641-4	SPACER	5
-	1	1					238011-2	BLOCK, CRIMPER SPACER	4
-	1	2	1				2-1633961-3	CRIMPER, INSULATION F PREMIUM	3
-	1	1					1-455888-2	SPACER, CRIMPER	2
-	1	2	1				1-456406-6	CRIMPER, WIRE PREMIUM	1
-	77	72	-	2			PART NO	DESCRIPTION	ITEM NO

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN		CHK		APV	
mm	0 PLC ±	1 PLC ±	2 PLC ±	3 PLC ±	4 PLC ±	Y. YIN	12JAN2012	G. BAILEY	12JAN2012
	ANGLES ±	FINISH ±				S. XI	12JAN2012		
MATERIAL									

STE TE Connectivity
Harrisburg, PA 17105-3608


NAME Ocean End Feed Applicator

SIZE A | **CAGE CODE** 00779 | **DRAWING NO** C=2150037

RESTRICTED TO -


Customer Accessible Production Drawing | **SCALE** 1:1 | **SHEET** 1 of 4 | **REV** F

LOC	DIST	REV	DESCRIPTION	DATE	OWN	APVD
A	66		SEE SHEET 1			


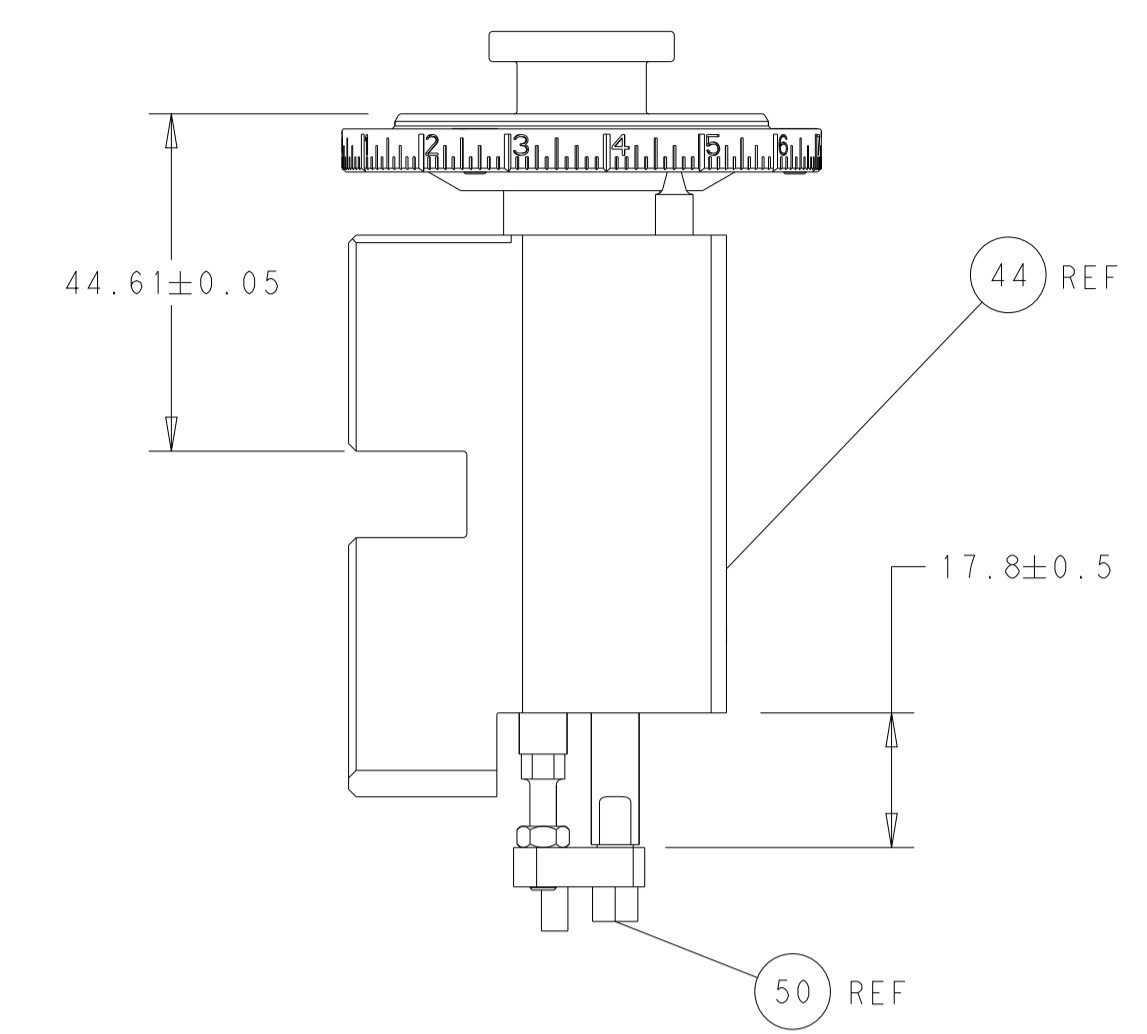


RAM AND HOLDDOWN SET-UP


FEED TYPE

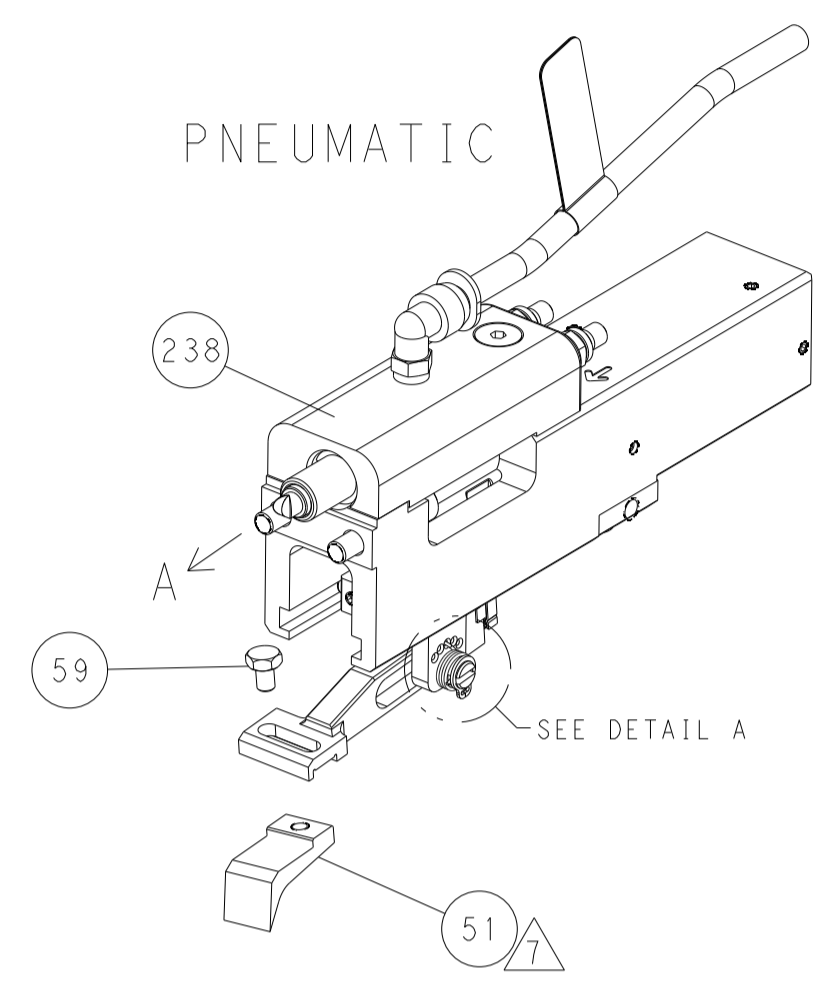

FEED SPRING SETTING POSITION

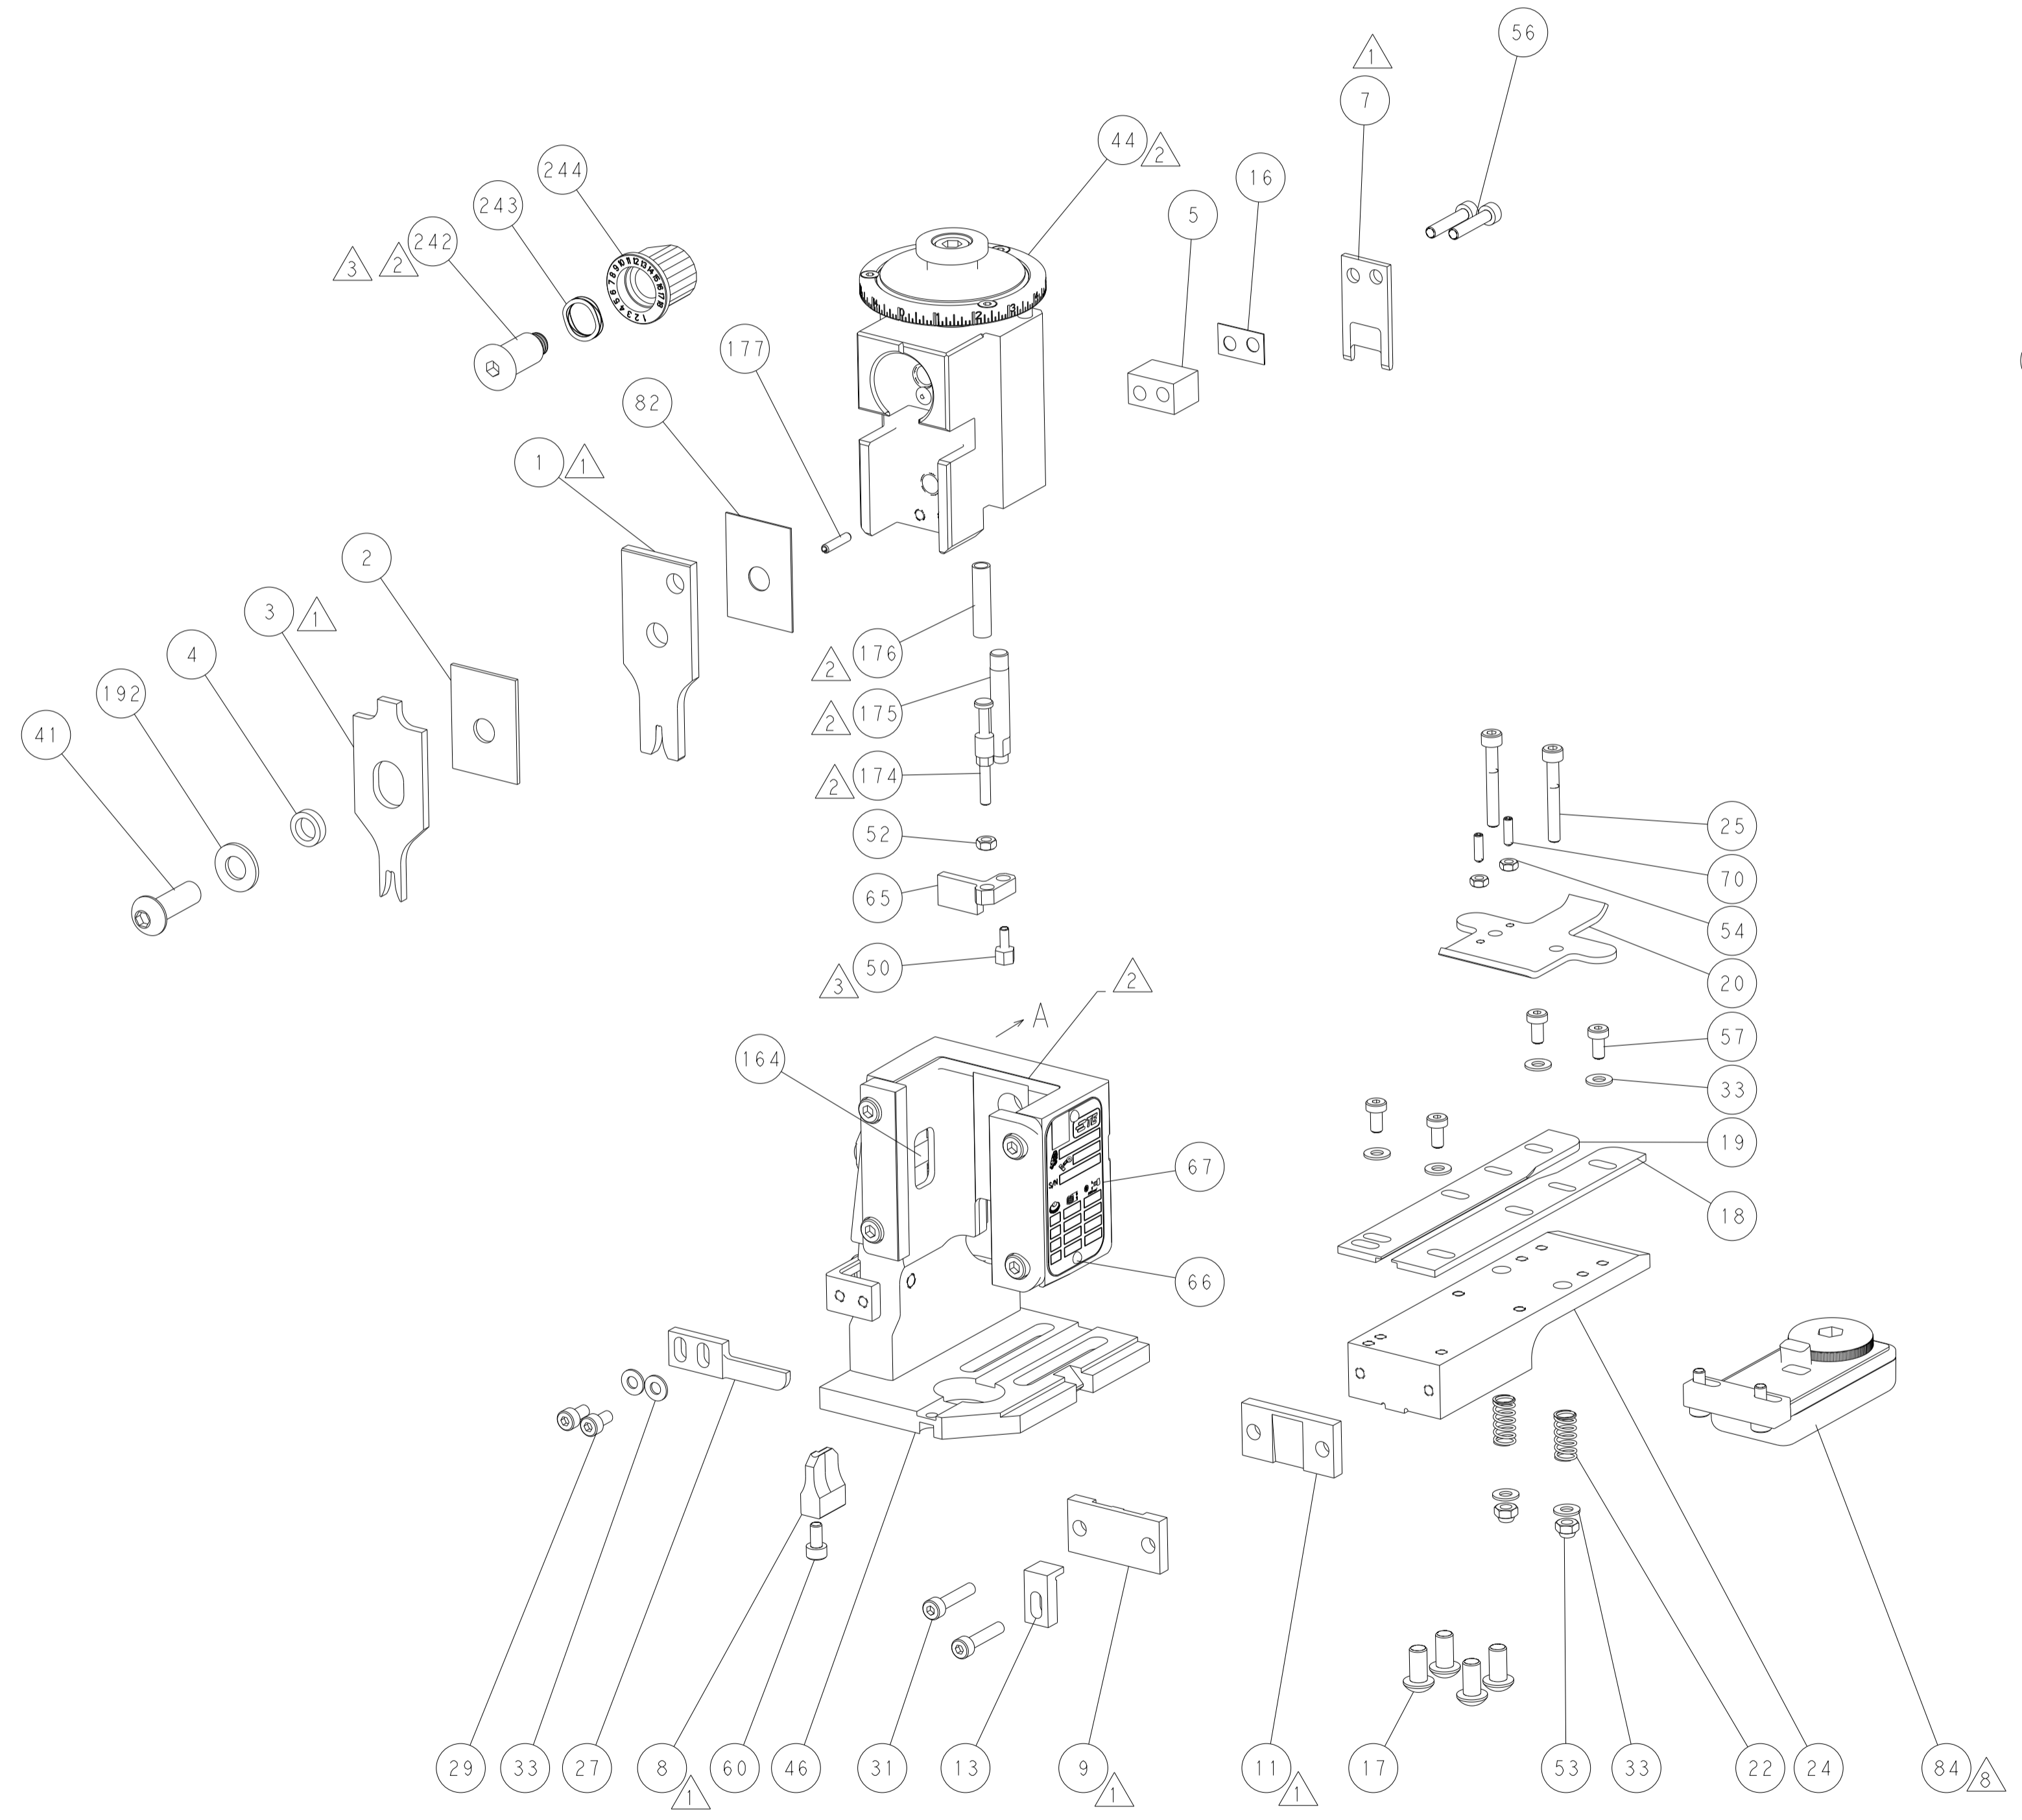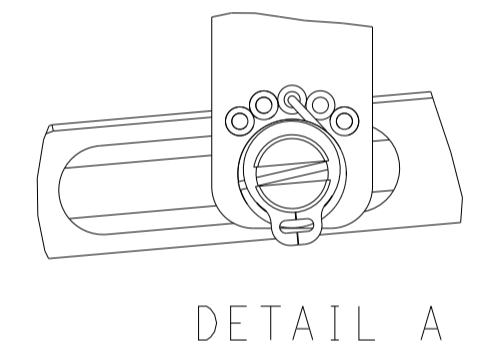

CAM POSITION

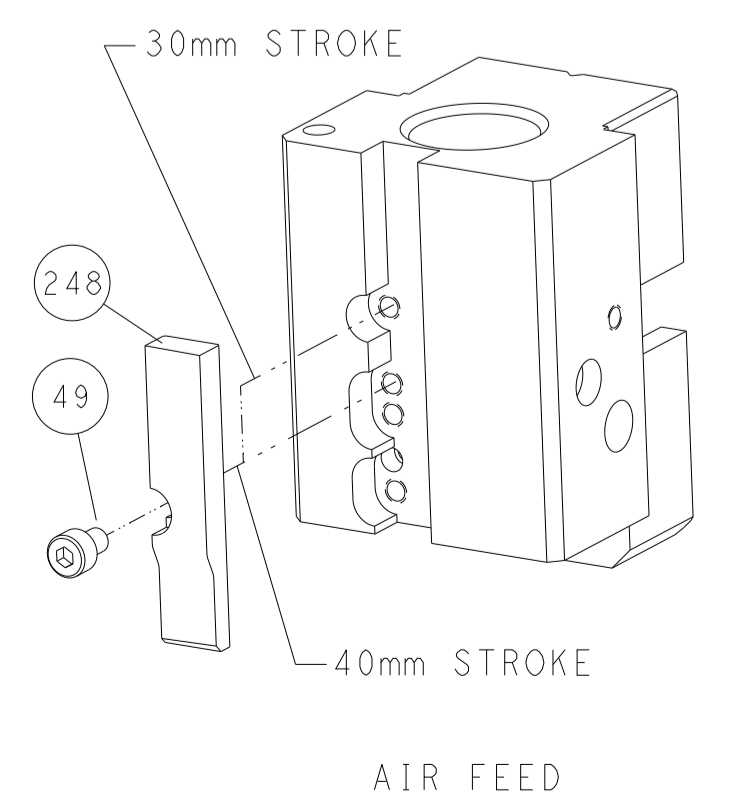


ATLANTIC VERSION
 Shown on sheets 1 of 4 & 2 of 4
 (Pacific version shown on sheets 3 of 4 & 4 of 4)

<small>THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.</small>		DWN Y. YIN 12JAN2012	TE Connectivity Harrisburg, PA 17105-3608
<small>THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.</small>		CHK G. BAILEY 12JAN2012	NAME Ocean End Feed Applicator
DIMENSIONS: mm		S. XI 12JAN2012	SIZE A1
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		PRODUCT SPEC APPLICATION SPEC	CAGE CODE 00779
MATERIAL:		WEIGHT:	DRAWING NO. C=2150037
CUSTOMER ACCESSIBLE PRODUCTION DRAWING		SCALE 1:1	SHEET 2 OF 4

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION		
COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER	REVISION	DESCRIPTION	FEED TYPE
2-2150037-2	F	FINE CRIMP HEIGHT ADJUST	PNEUMATIC
7-2150037-7	A	CRIMP TOOLING KIT	-

PACIFIC VERSION TERMINATOR INTERFACE ADAPTER

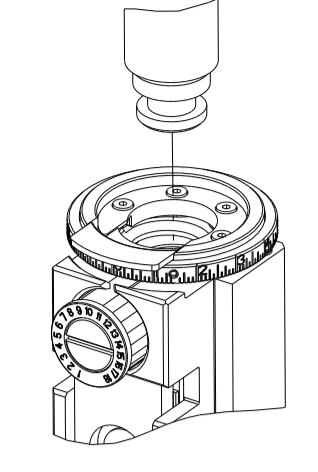

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.29 mm (.090)	F
INSUL	3.56 mm (.140)	F
APPLICATOR INSTRUCTIONS 408-35043		

TERMINAL DATA: TE TERMINAL TE CRIMP SPECIFICATION			
TERMINAL NAME: FASTIN-FASTON, .250 SERIES			
WIRE STRIP LENGTH		INSULATION DIAMETER RANGE	
5.21-5.97 mm (.205-.235 IN)		Ø2.16-3.18 mm (.085-.125 IN)	
TERMINAL APPLICATION SPECIFICATION	(A) 114-2025	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
(A) 60294-1	(A) 60294-2	(A) 62553-1	(A) 62553-3

TERMINAL DATA: TE TERMINAL TE CRIMP SPECIFICATION			
TERMINAL NAME: FASTIN-FASTON, .250 SERIES			
WIRE STRIP LENGTH		INSULATION DIAMETER RANGE	
5.21-5.97 mm (.205-.235 IN)		Ø2.16-3.18 mm (.085-.125 IN)	
TERMINAL APPLICATION SPECIFICATION	(B) 114-20021	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
(B) 160691-1	(B) 160691-4	(B) 160691-7	
(B) 160691-2	(B) 160691-5	(B) 160645-1	
(B) 160691-3	(B) 160691-6	(B) 160645-2	

WIRE SIZE	CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING
18 AWG	1.35 +/- 0.05 [0.053 +/- .002]	5.1
20 AWG	1.22 +/- 0.05 [0.048 +/- .002]	6.7
22 AWG	1.17 +/- 0.05 [0.046 +/- .002]	7.2

WIRE SIZE	CRIMP HEIGHT mm [INCH]	CRIMP HEIGHT REFERENCE SETTING
18 AWG	1.32 +/- 0.05 [0.052 +/- .002]	5.3
20 AWG	1.22 +/- 0.05 [0.048 +/- .002]	6.7
22 AWG	1.14 +/- 0.05 [0.045 +/- .002]	7.4

- RECOMMENDED SPARE PARTS
- REFER TO SUPPLIED INSTRUCTION SHEET FOR CLEANING, LUBRICATION AND STORAGE OF APPLICATOR.
- APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50. APPLY PART NUMBER 2-23419-6 LOCTITE TO THREADS OF ITEM 242.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.
- 6. UNLESS SPECIFIED OTHERWISE TORQUE VALUES SHALL BE USED PER DOCUMENT, 101-35000.
- POSITION ITEM 51 TO FEED OFF THE INSULATION BARREL OF TERMINAL.
- TERMINAL LUBRICANT IS RECOMMENDED.

***WARNING**
ON INSTALLATION, SET WIRE DISC TO CRIMP HEIGHT REFERENCE SETTING FOR LARGEST WIRE SIZE. CRIMP HEIGHT REFERENCE SETTINGS GREATER THAN THE VALUE SHOWN MAY CAUSE DAMAGE TO THE CRIMP TOOLING. REFER TO THE INSTRUCTION SHEET FOR PROPER SETUP AND ADJUSTMENTS.


PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

LOC	DIST	REVISIONS				
A	66	P	LTN	DATE	OWN	APVD
		-	SEE SHEET 1	-	-	-

	-	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
	-	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
	-	1	2119083-1	RETAINER, INSULATION DIAL	242
	-	1	2844940-4	AIR FEED MODULE	238
	-	1	1-18028-0	WASHER, FLAT, REG M8	192
	-	4	2079383-9	SCR, BHSC, RoHS (M6 X 20)	186
	-	1	6-993111-6	PIN, SLOTTED SPRING 3.0 X 14.0	177
	-	1	8-22280-7	SPRING, COMPRESSION	176
	-	1	1752353-2	GUIDE PIN, HOLDDOWN	175
	-	1	1901680-2	GUIDE PIN, HOLDDOWN	174
	-	REF	994970-2	COUNTER, MAGNETIC	164
	-	1	2119641-2	FEED CAM, AIR FEED	152
	-	1	2168083-8	SCR, SKT HD CAP, RoHS, M4 X 16	144
	-	1	2119655-6	APPLICATOR BASIC ASSEMBLY, EF	141
	-	1	1803518-1	RAM ASSEMBLY, EF PACIFIC	140
	-	1	2119955-2	ASSY, LUBRICATOR, END FEED	84
	-	1	455888-5	SPACER, CRIMPER	82
	-	1	1803607-4	DOCUMENTATION PACKAGE	71
	-	2	2-18032-2	SCR, SET, FLT PNT, M3 X 10.0	70
	-	1	2119740-1	TAG, IDENTIFICATION	67
	-	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
	-	1	1976052-1	HOLDDOWN, TERMINAL	65
	-	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
	-	4	2168400-4	SHCS, LOW HEAD, RoHS, M4 X 8	57
	-	2	2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	56
	-	2	5018030-1	NUT, HEX, REG, RoHS, M3	54
	-	2	986965-8	NUT, LOCK, HEX, TORQUE (M4)	53
	-	1	1-5018030-0	NUT, HEX, REG, RoHS, M3.5	52
	-	1	2063961-9	FEED FINGER	51
	-	1	1752354-3	STANDOFF, HOLD-DOWN	50
	-	1	18023-9	SCR, SKT HD CAP M4 X 6.0	49
	-	1	1803602-1	SCR, BHSC, RoHS (M8 X 25)	41
	-	8	1-18028-2	WASHER, FLAT, REG M4	33
	-	2	2168083-9	SCR, SKT HD CAP, RoHS, M4 X 20	31
	-	2	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	29
	-	1	240639-1	STRIPPER (MACHINING)	27
	-	2	1-2168083-5	SCR, SKT HD CAP, RoHS, M4 X 30	25
	-	1	1752371-5	PLATE, STRIP GUIDE	24
	-	2	2-22281-3	SPRING, COMPRESSION	22
	-	1	1803292-4	DRAG	20
	-	1	1-1901696-8	STRIP GUIDE, REAR	19
	-	1	1-1901695-8	STRIP GUIDE, FRONT	18
	-	1	5-240641-8	SPACER	16
	-	1	1752360-1	SPACER, HOLD-DOWN	13
	-	1	240644-1	PLATE, REAR SHEAR	11
	-	-	-	-	10
	-	1	690482-3	PLATE, FRONT SHEAR	9
	1	1	1338673-6	ANVIL, COMBINATION	8
	-	1	1-2217206-3	BLADE, SLUG	7
	-	1	7-240641-4	SPACER	5
	-	1	238011-2	BLOCK, CRIMPER SPACER	4
	1	1	2-1633961-3	CRIMPER, INSULATION F PREMIUM	3
	-	1	1-455888-2	SPACER, CRIMPER	2
	1	1	1-456406-6	CRIMPER, WIRE PREMIUM	1
	-	77-22	PART NO	DESCRIPTION	ITEM NO


DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWG		12JAN2012		CHK		12JAN2012		G. BAILEY		NAME		TE Connectivity		Harrisburg, PA 17105-3608	
mm		0 PLC ±		S. XI		12JAN2012		APVD		S. XI		12JAN2012		PRODUCT SPEC		Ocean End Feed		Applicator	
MATERIAL		FINISH		APPLICATION SPEC		WEIGHT		A		00779		C=2150037		RESTRICTED TO		Customer Accessible Production Drawing		SCALE 1:1 SHEET 3 OF 4 REV F	

LOC	DIST	REV	DATE	BY	APPV
A	66				


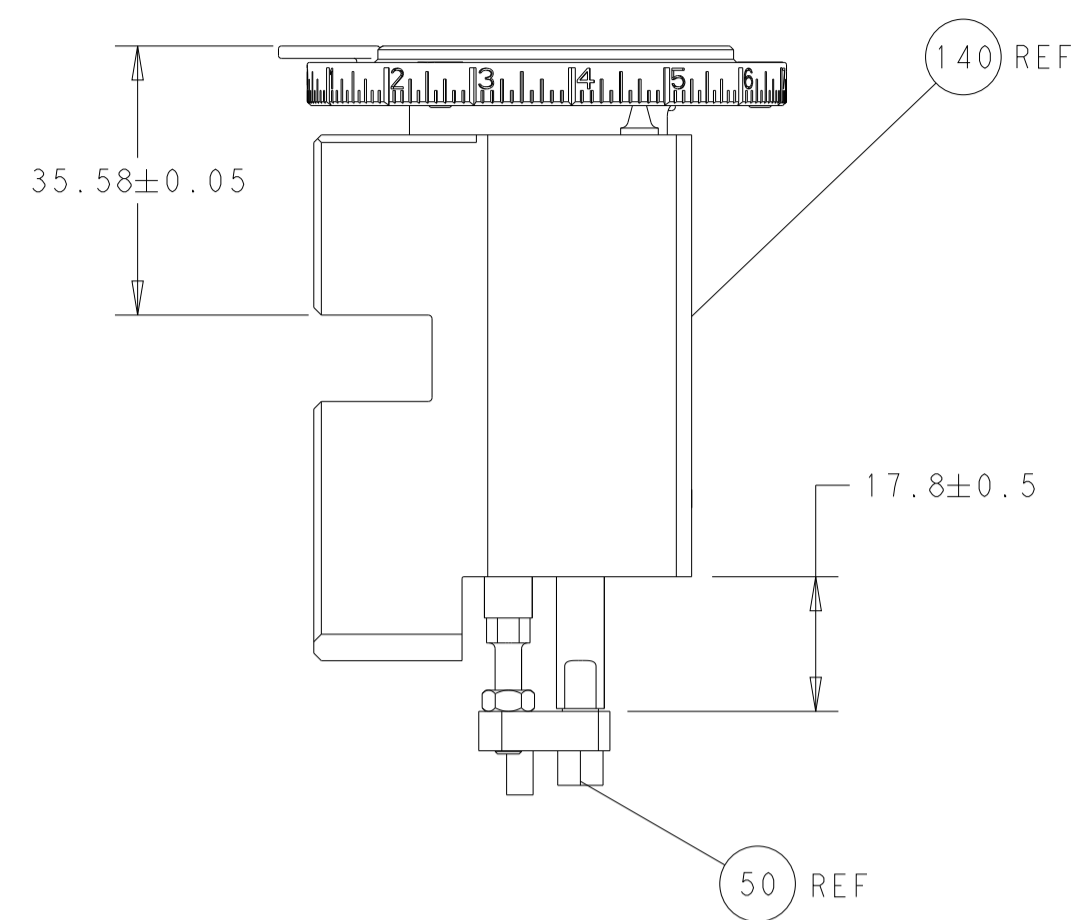


RAM AND HOLDDOWN SET-UP


FEED TYPE

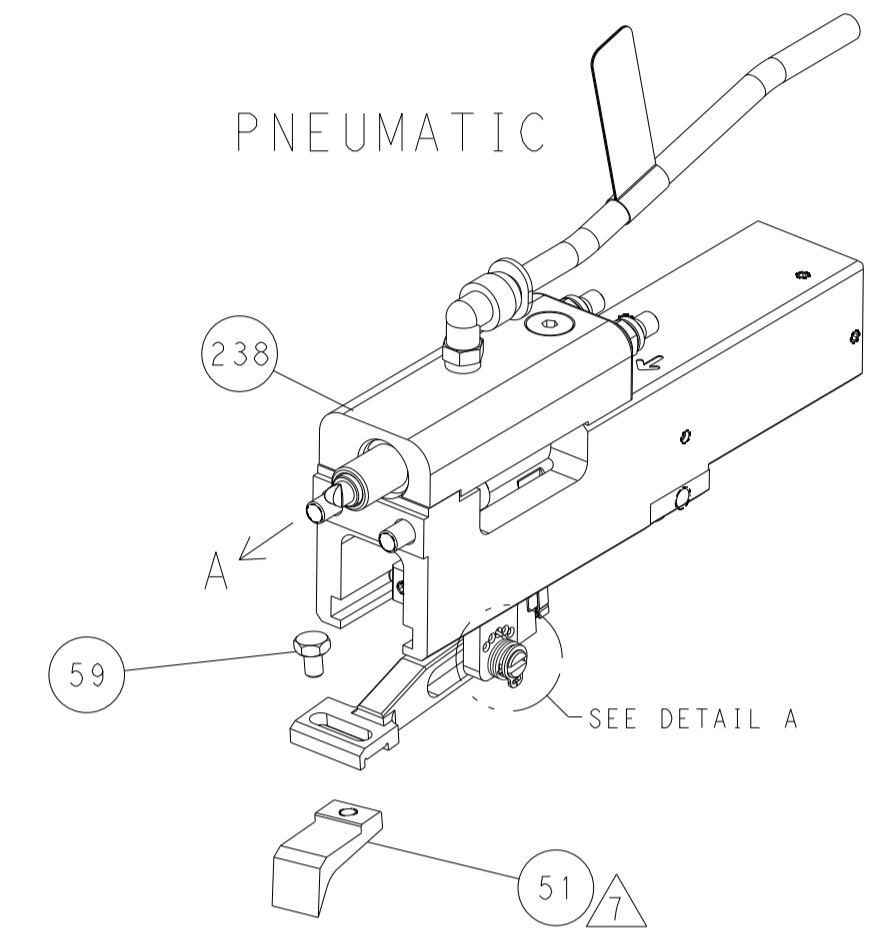

FEED SPRING SETTING POSITION

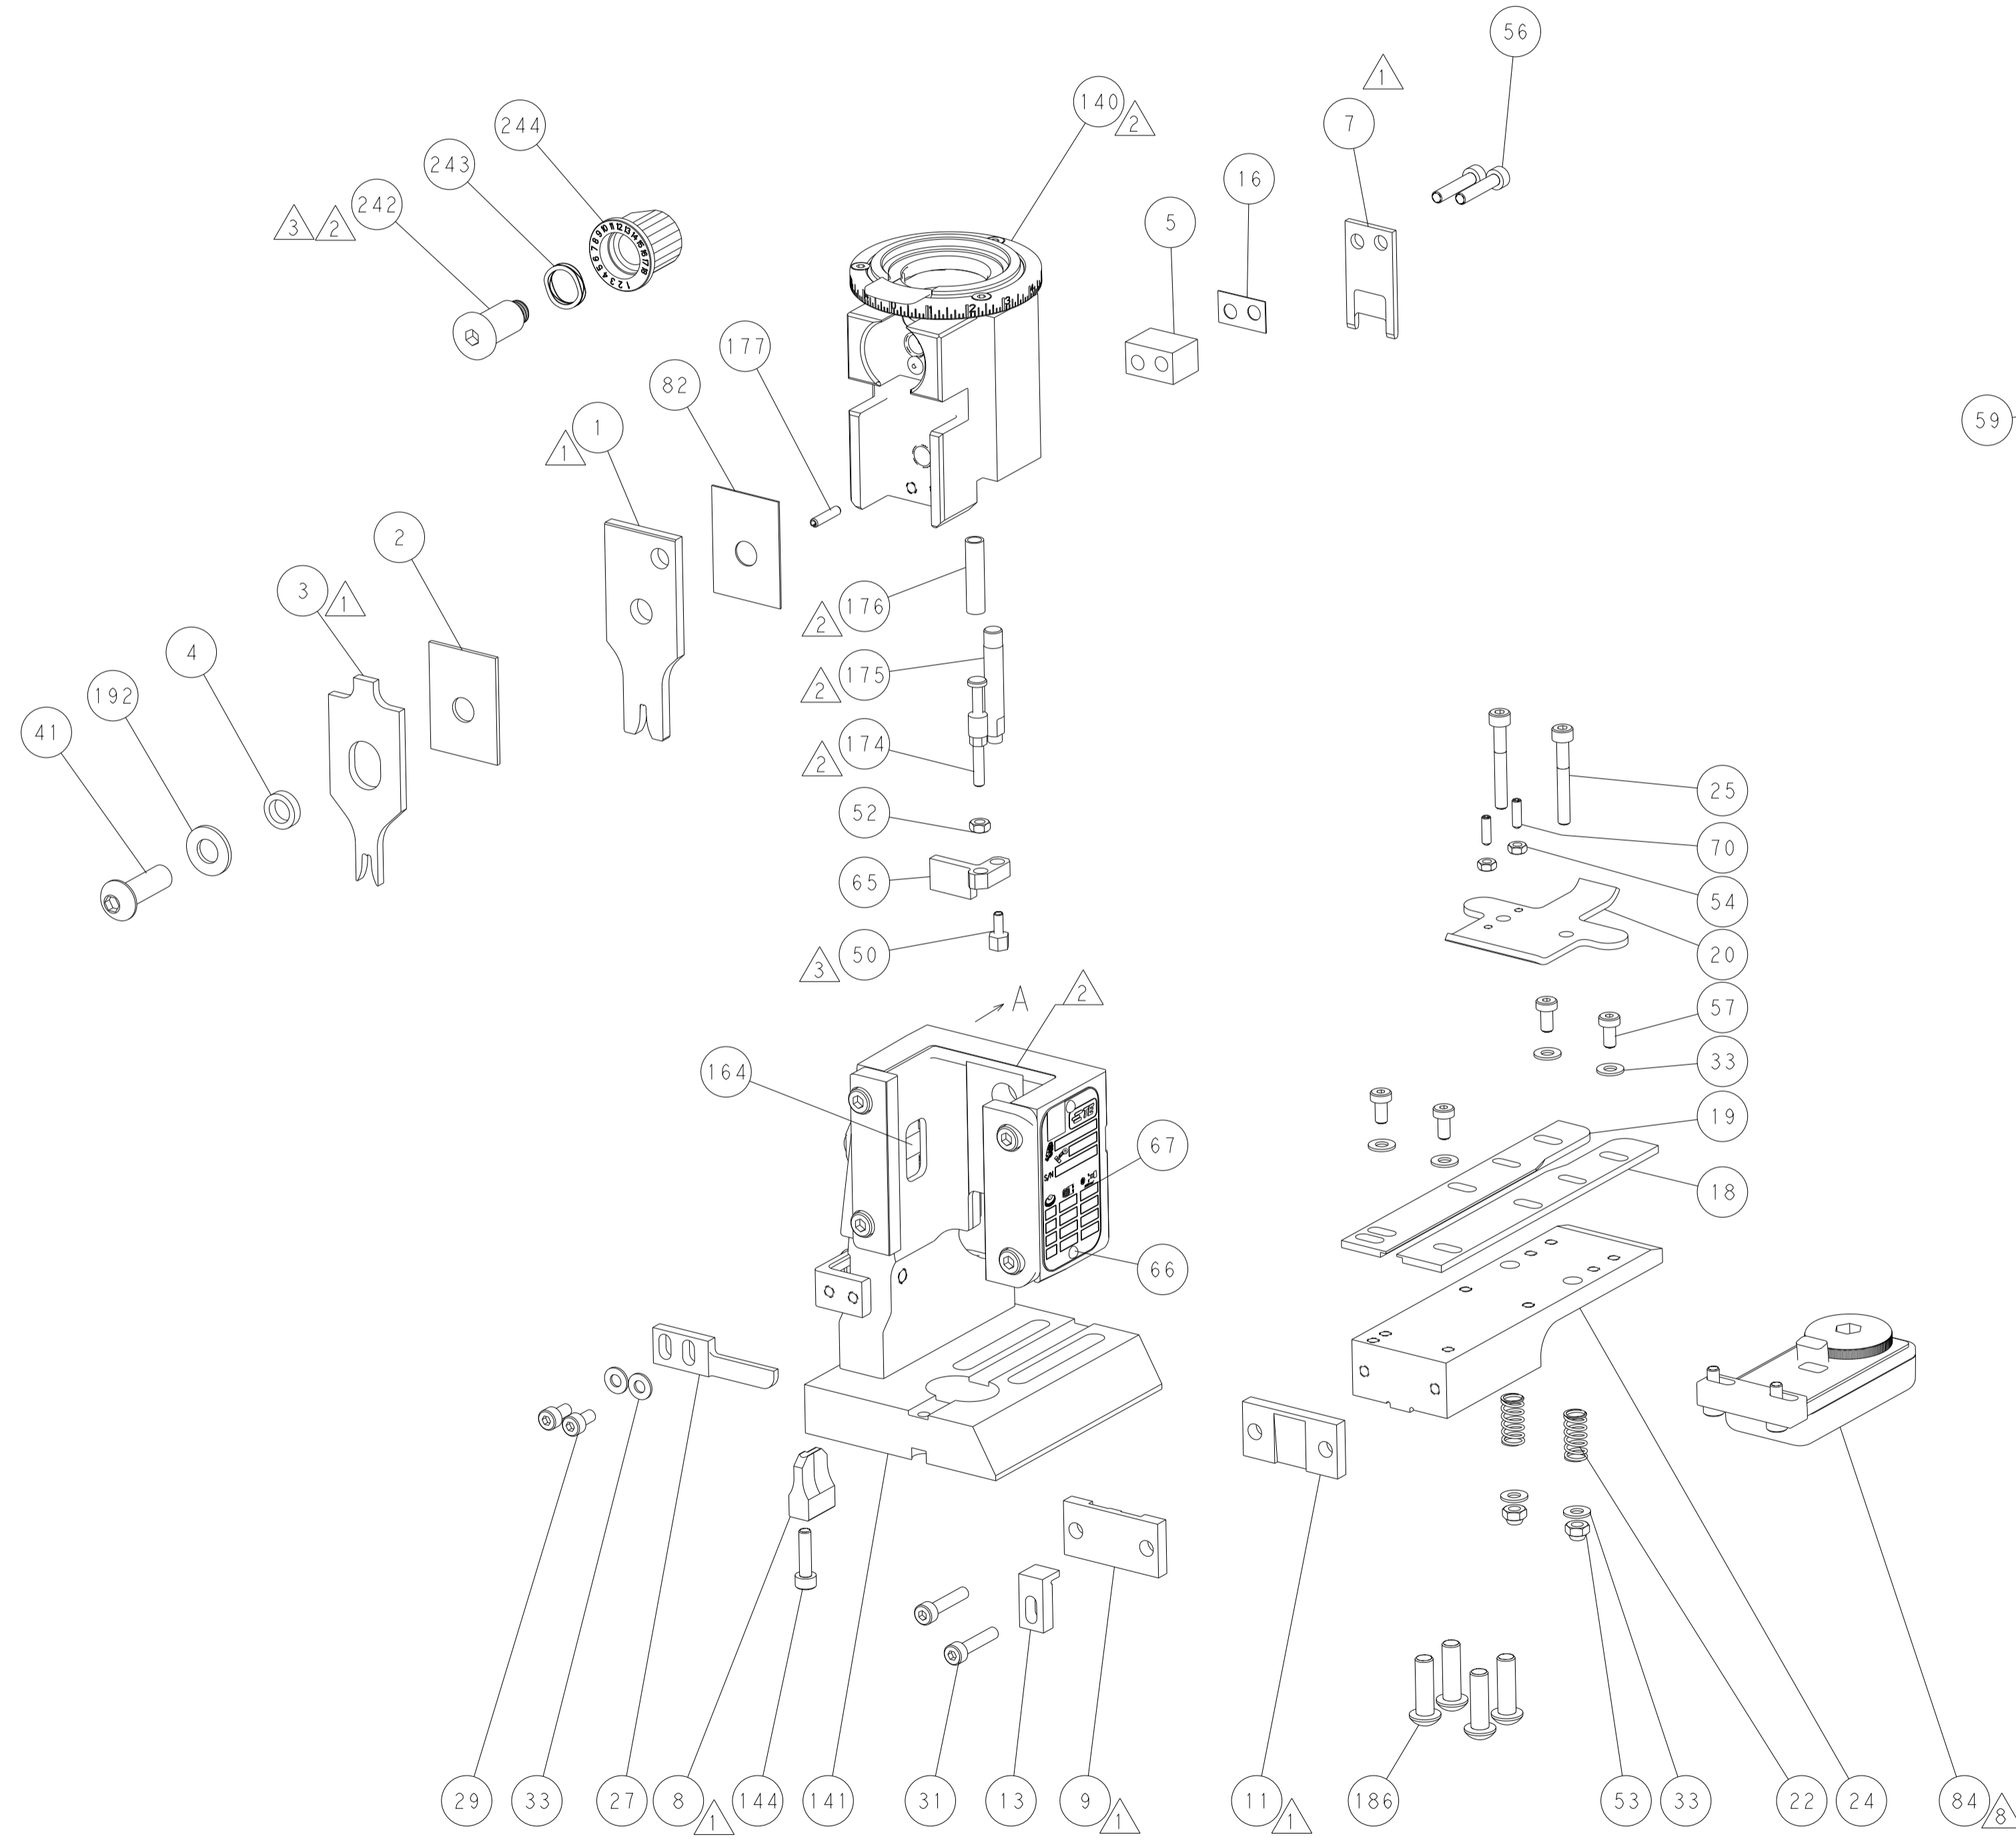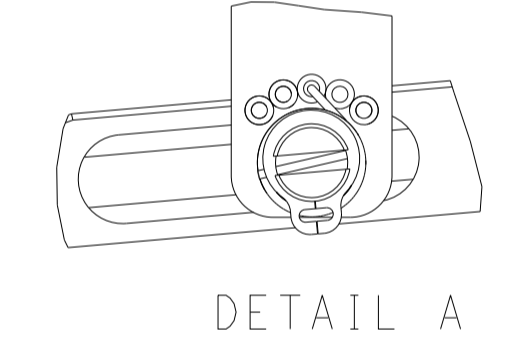

CAM POSITION

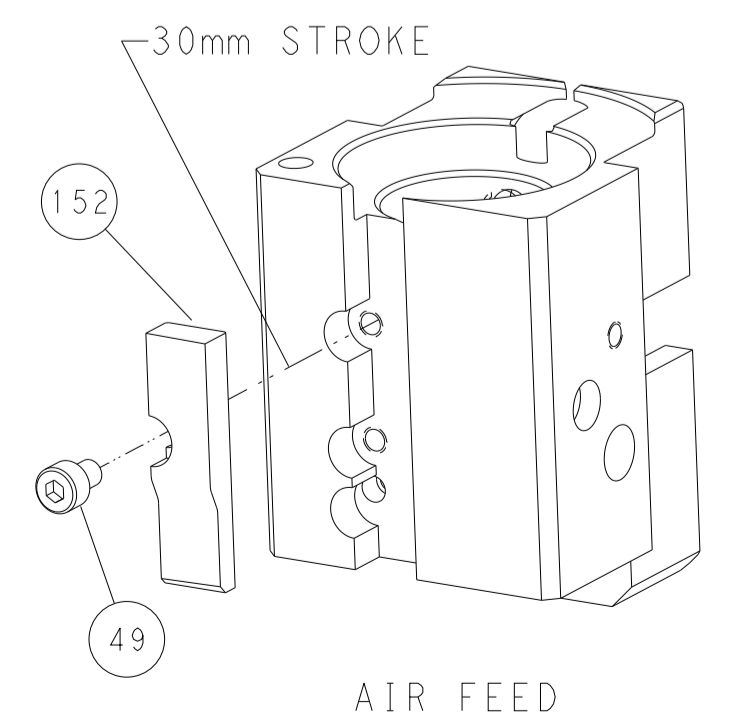

AIR FEED

PACIFIC VERSION
 Shown on sheets 3 of 4 & 4 of 4
 (Atlantic version shown on sheets 1 of 4 & 2 of 4)

<small>THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20 COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.</small>		DWN Y. YIN 12JAN2012 CHK G. BAILEY 12JAN2012 APVD S. XI 12JAN2012	NAME Ocean End Feed Applier
DIMENSIONS: mm 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH	SIZE CAGE CODE DRAWING NO A 00779 C-2150037	RESTRICTED TO -
MATERIAL:		WEIGHT:	SCALE 1:1 SHEET 4 OF 4 REV F