


Core **E42/21/15**

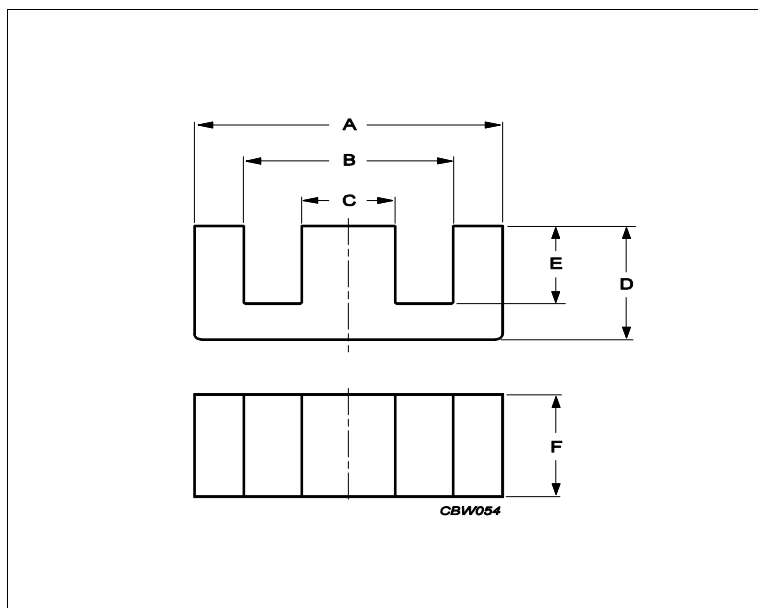

Effective parameters			
	Parameter	Value	Unit
$\Sigma(I/A)$	core factor (C1)	0.548	mm ⁻¹
Ve	effective volume	17300	mm ³
Le	effective length	97	mm
Ae	effective area	178	mm ²
Amin	minimum area	175	mm ²
m	E42/21/15	≈ 44	g/pcs

Dimensions for product: E42/21/15						
	Nom	Tol +	Tol -	Max	Min	Unit
A	43.00	0.00	1.70	43.00	41.30	mm
B	29.50	1.40	0.00	30.90	29.50	mm
C	12.20	0.00	0.50	12.20	11.70	mm
D	21.00	0.20	0.20	21.20	20.80	mm
E	14.80	0.60	0.00	15.40	14.80	mm
F	15.20	0.00	0.60	15.20	14.60	mm

Inductance factor					
Material	Value	Tol +	Tol -	Unit	
3C91	5300	25%	25%	nH/turns ²	
3C92	3100	25%	25%	nH/turns ²	
3C94	4100	25%	25%	nH/turns ²	
3C95	5300	25%	25%	nH/turns ²	
3F36	2700	25%	25%	nH/turns ²	

Power loss: 3C91					
Measuring conditions			Max	Unit	
100 kHz	200 mT	60 °C	8.700	W/set	
Power loss: 3C92					
Measuring conditions			Max	Unit	
100 kHz	200 mT	100 °C	8.700	W/set	
Power loss: 3C94					
Measuring conditions			Max	Unit	
100 kHz	200 mT	100 °C	8.700	W/set	

Core **E42/21/15**

Power loss: 3C95				
Measuring conditions			Max	Unit
100 kHz	200 mT	100 °C	8.300	W/set
100 kHz	200 mT	25 °C	9.000	W/set
Power loss: 3F36				
Measuring conditions			Max	Unit
500 kHz	50 mT	100 °C	2.600	W/set
500 kHz	100 mT	100 °C	20.000	W/set

Bsat					
Measuring conditions			Material	Min	Unit
25 kHz	250 A/m	100 °C	3C91	320	mT
25 kHz	250 A/m	100 °C	3C92	370	mT
25 kHz	250 A/m	100 °C	3C94	320	mT
25 kHz	250 A/m	100 °C	3C95	330	mT
25 kHz	250 A/m	100 °C	3F36	340	mT

Accessories		
Ordering name	Description	Ordering code
CLA-E42/21/15	Clasp	432202100931
CP-E42/21/15-1S	Coil former, termoplastic	432202102641
CPH-E42/21/15-1S-10P	Coil former, termoplastic, horizontal	432202131833
SPR-E42/21/15	Spring	432202100921