



Bestückungsplan / contact layout

■ bestückt / assembled

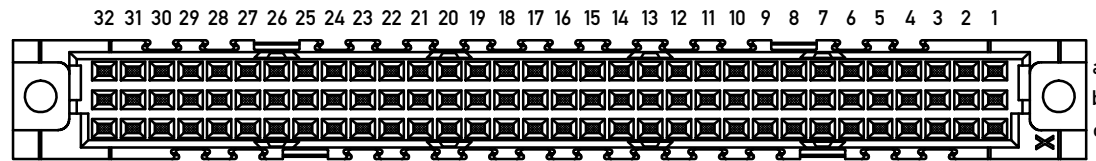

Leiterplatten-Lochbild / PCB drillhole Pattern

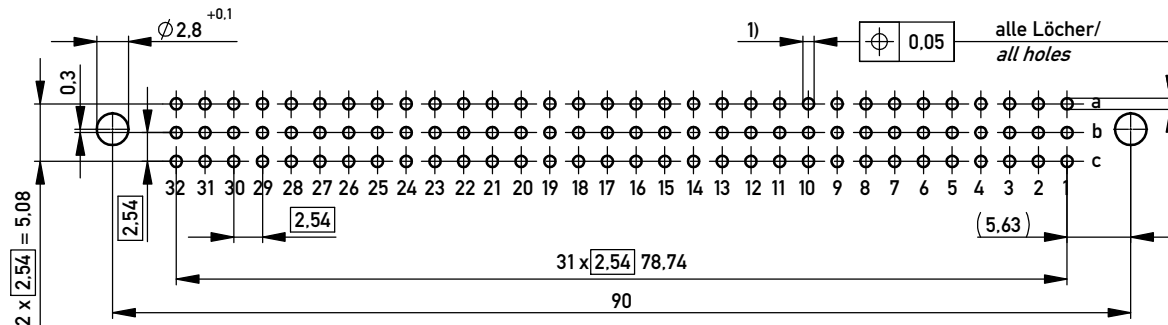

Elastische Einpresszone / compliant pressfit zone
 Isolierwerkstoff / housing material : PBT GF 30
 Bauart 7 / type 7
 Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles
 Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2
 Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2
 Schichtaufbau im metallisierten Loch siehe Zeichnung 114124
 diameter of drilled hole see drawing 114124

- 1) $\phi 1.0^{+0.09}_{-0.06}$ Durchmesser des metallisierten Loches
- $\phi 1.0^{+0.09}_{-0.06}$ Diameter of finished plated-through hole

Information:	Tolerances	All Dimensions in mm	Scale	2:1
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Designation Federleiste C 96 EE <i>Fem. Conn. C 96 Pressfit</i>	
Subject to modification without prior notice. Drawing will not be updated.		www.ERNI.com	254015	
Index	Date		Class	STVC

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.