



B4505CN

Base Loaded Mobile Antennas 450-470 MHz

Laird Connectivity's ongoing commitment to refinement in mechanical and electrical design results in the most technically advanced mobile load coil antennas on the market. Exclusive features such as stainless-steel whips, housings constructed with ABS material injected molded around a solid brass insert, and gold-plated push pin contacts make Laird Connectivity the obvious choice for quality and long-lasting value for demanding mobile radio communications.

FEATURES AND BENEFITS

- Long tuning ferrule allows for greater freedom in minor frequency adjustment. Tuning chart included
- High performance mobile antenna operates on a no ground plane (NGP) requirement
- Straight stainless-steel corona ball stays on the rod - no dissimilar metal interaction associated with competitor designs
- Easy installation with NMO mountable
- 100% tested on a network analyzer

APPLICATIONS

- Public safety
- Transportation
- Utility
- Military mobile

ELECTRICAL SPECIFICATIONS

Model Name	B4505CN/BB4505CN/B4505CNS/BB4505CNS
Operating Frequency (MHz)	450-470
VSWR - Avg	≤ 2.0:1
Gain (dBi)	5
Nominal Impedance (Ohms)	50
Max Power - Ambient 25°C (W)	100
Pattern	Omni-directional
Polarization	Vertical
Vertical Plane 3 dB Beamwidth (°)	28
Horizontal Plane 3 dB Beamwidth (°)	360

MECHANICAL SPECIFICATIONS

Dimensions - height x diameter - mm (inches)	820 x 36.57 (32.25 x 1.44)
Weight - g (oz.)	205.5 (7.25)


ENVIRONMENTAL SPECIFICATIONS

Indoor or Outdoor	Outdoor
Storage Temperature - °C (°F)	-35 to +85°C (-31 to +185°F)
Material Substance Compliance	RoHS

CONFIGURATION

PART NUMBER	CONNECTOR
B4505CN	NMO
BB4505CN	NMO
B4505CNS(R)	NMO
BB4505CNS(R)	NMO

RADIATION PATTERN

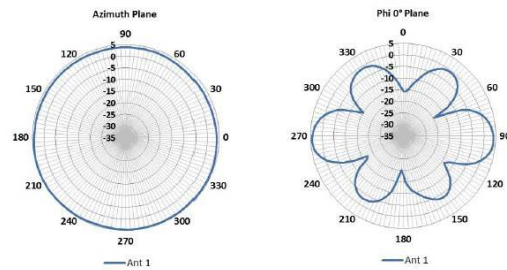

TUNING CHART

FREQUENCY - MHZ	ROD - CM (IN.)
450	28.26 (11 1/8)
455	27.46 (10 13/16)
460	26.35 (10 3/8)
465	25.4 (10)
470	24.9 (9 13/16)

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE product is installed. Useful lifetime of the original end product may vary but is not to exceed five (5) years from the original date of the end product purchase.

©2021 TE Connectivity. All Rights Reserved.

11/21 Original

