
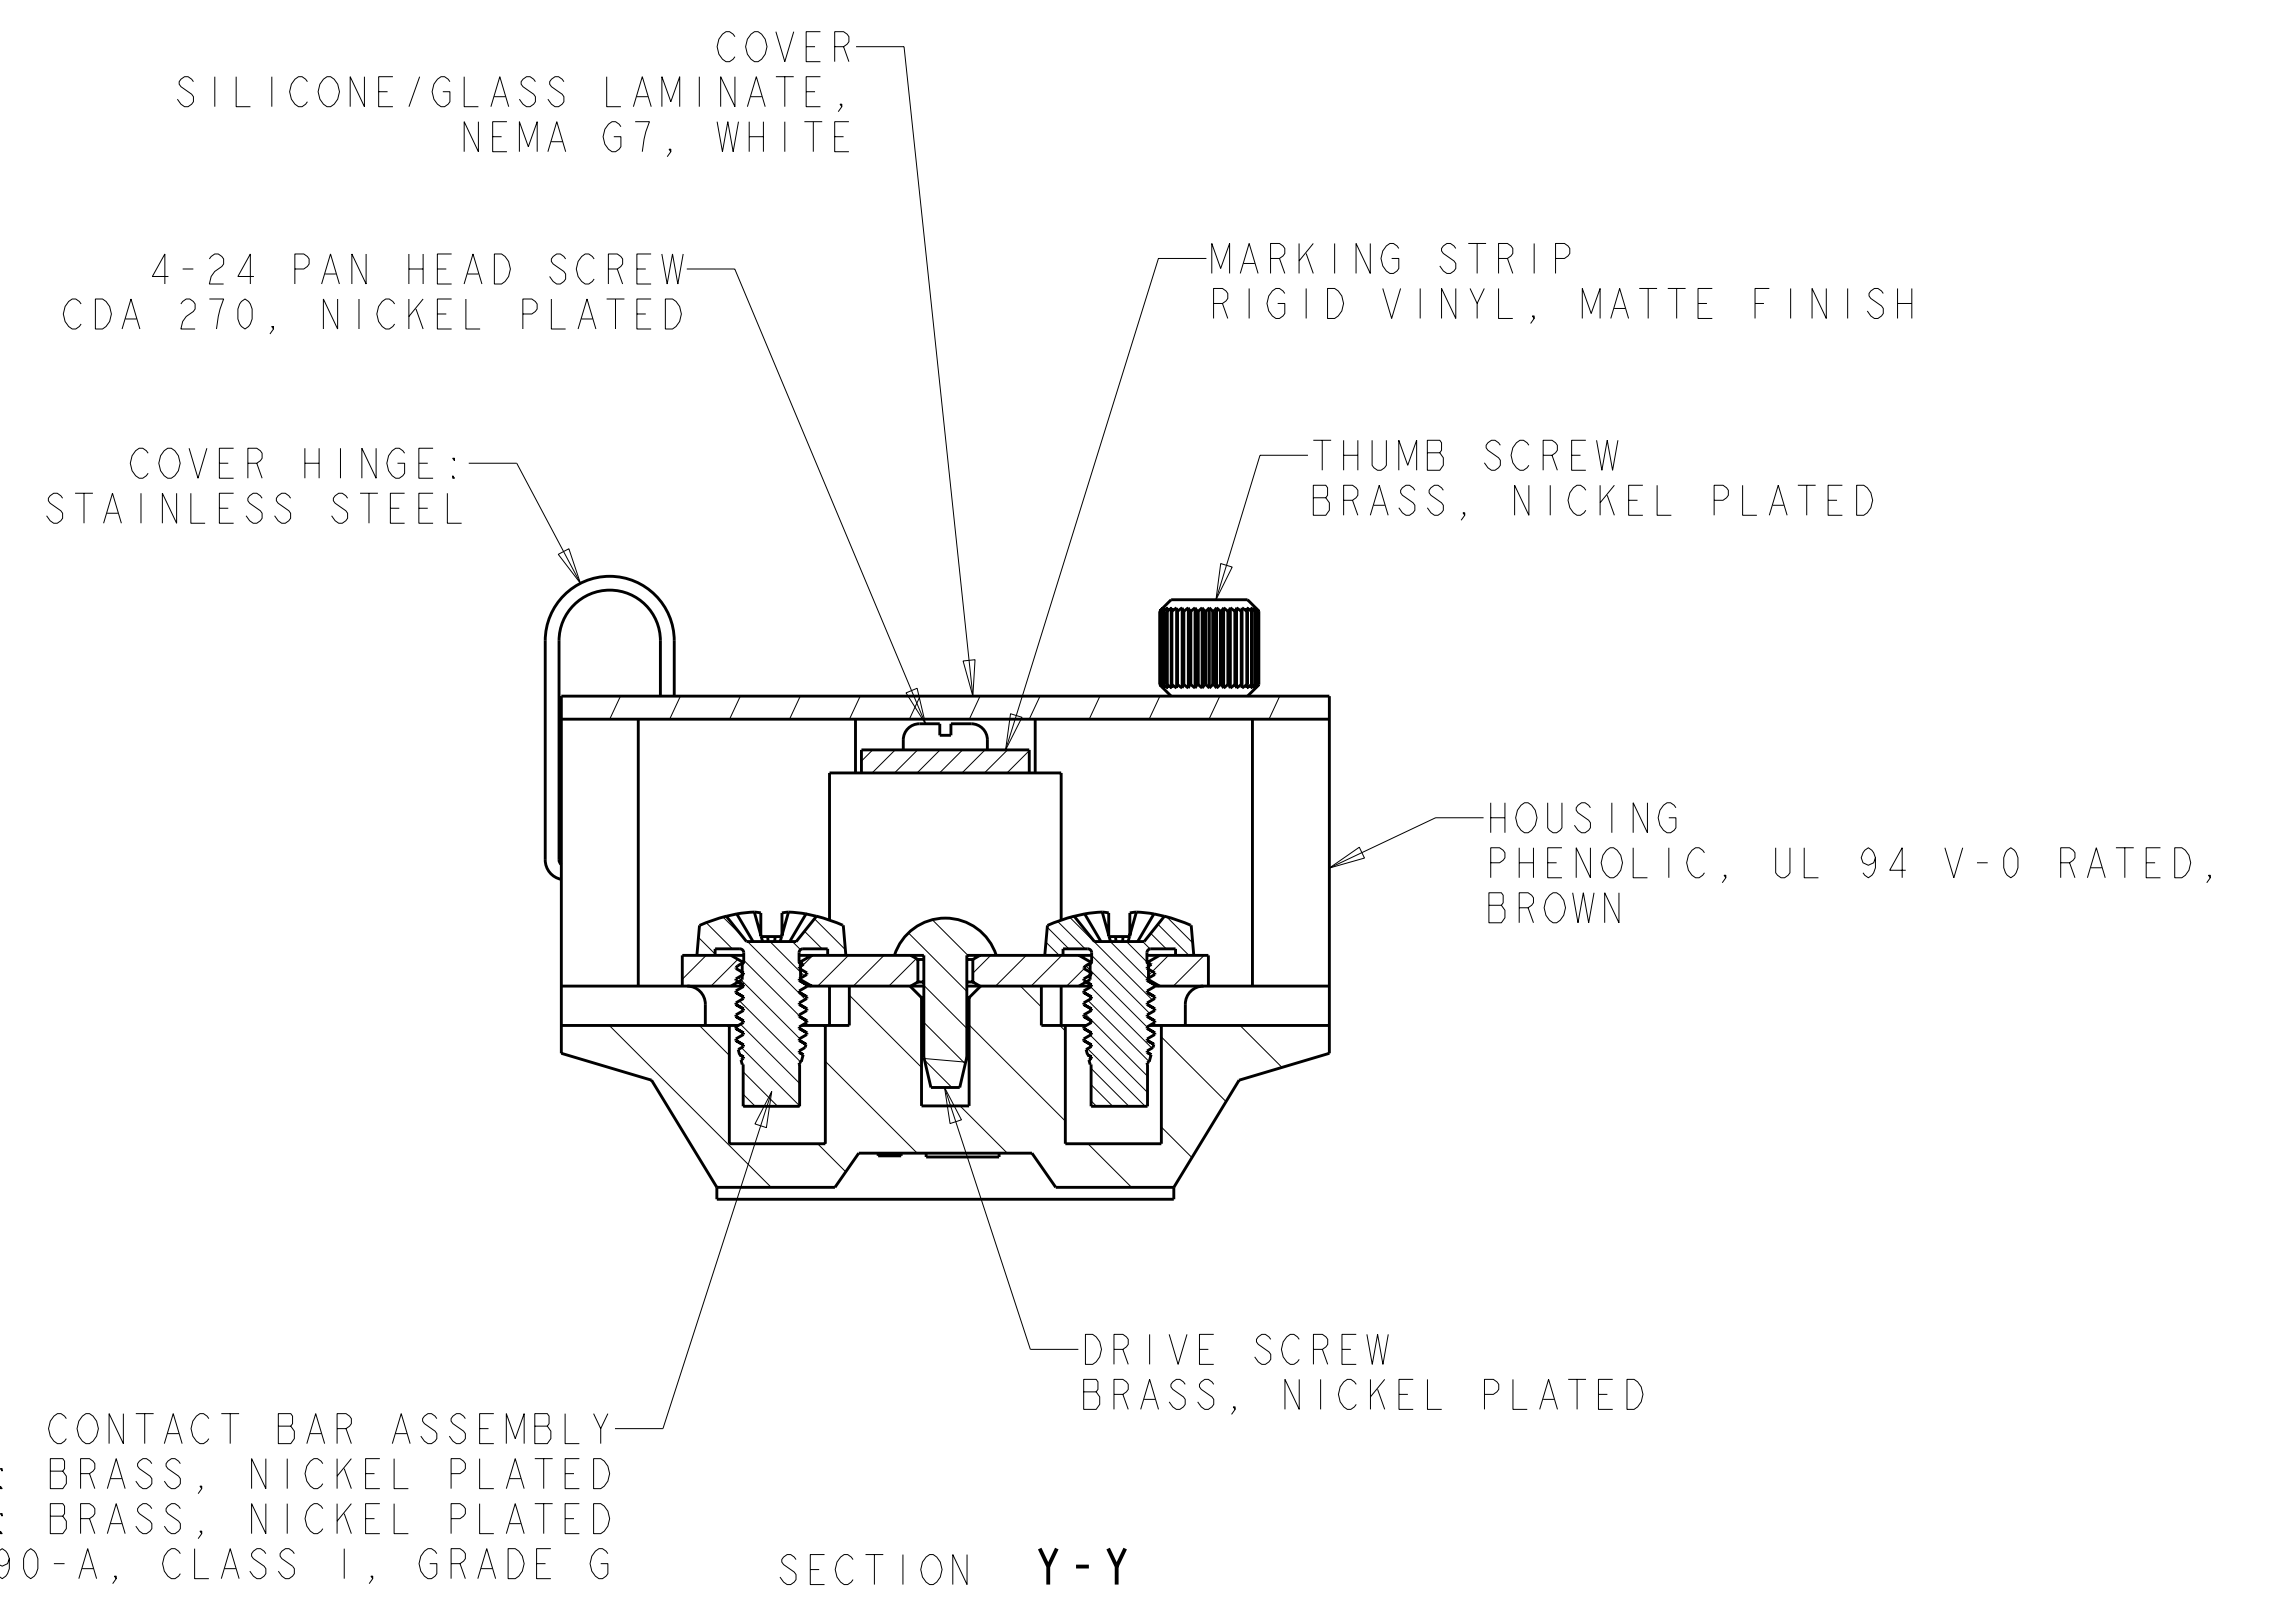
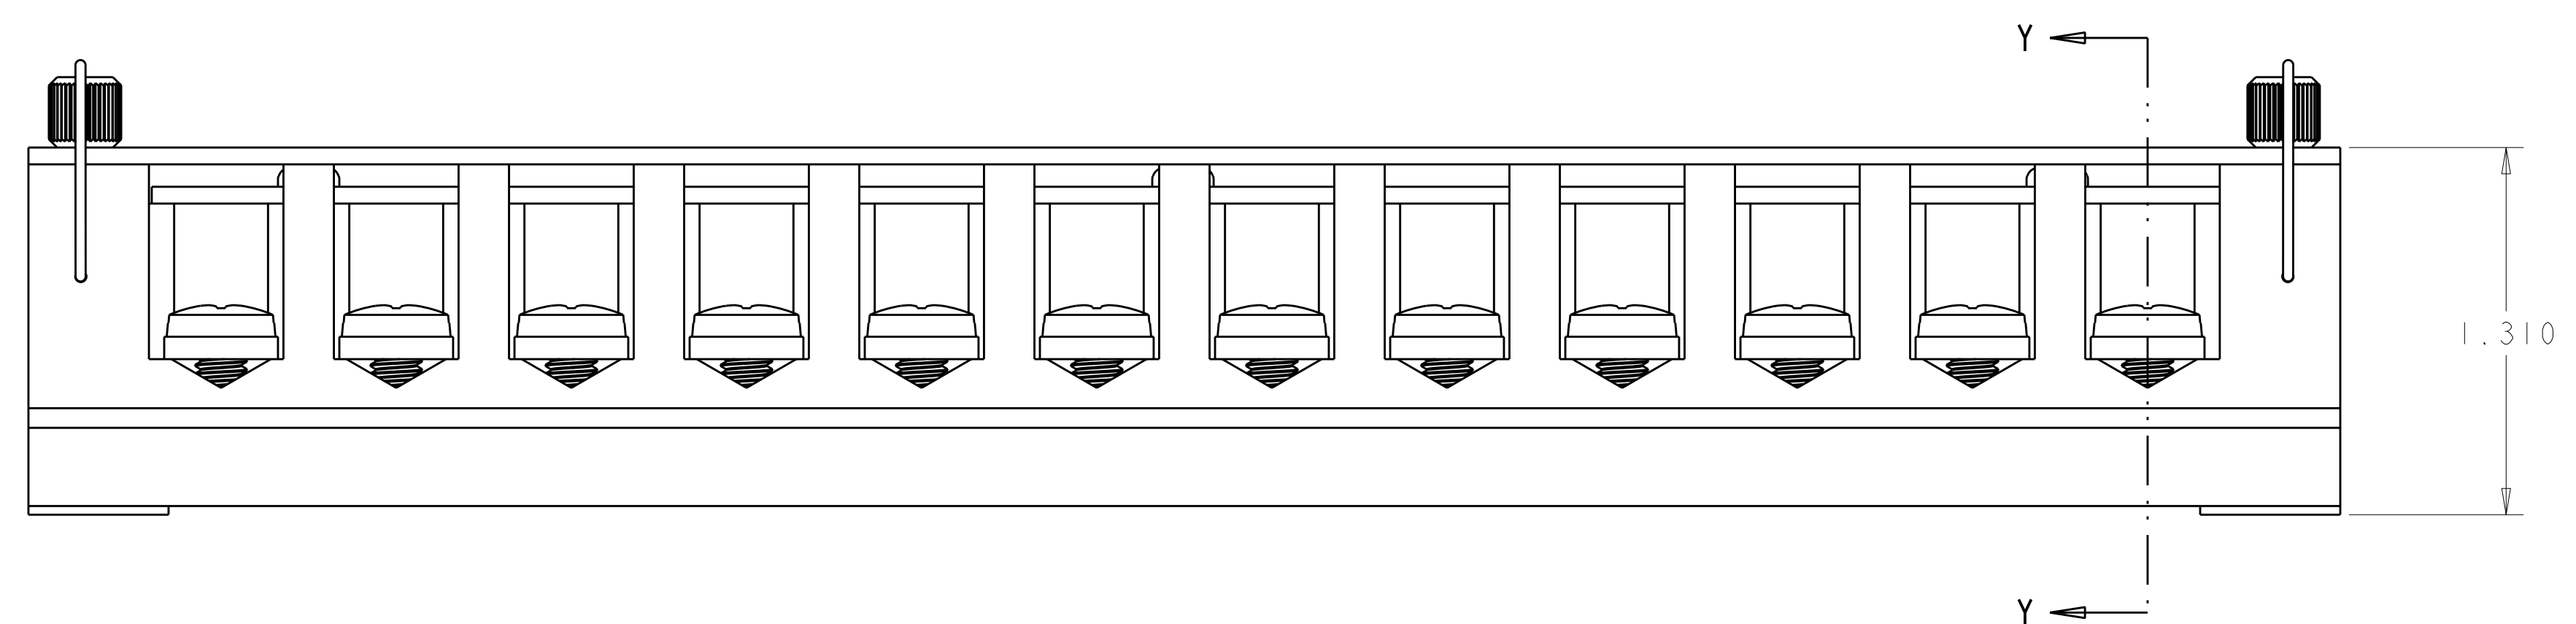


LOC	DIST	REVISIONS					
FT	0	P	LTB	DESCRIPTION	DATE	DWN	APVD
		A		PRELIMINARY	28FEB2002	SW	-
		B		REVISED EC 063B-0680-03	16OCT2003	SW	SY
		BI		REVISED PER ECO-09-025699	09DEC2009	KK	HMR

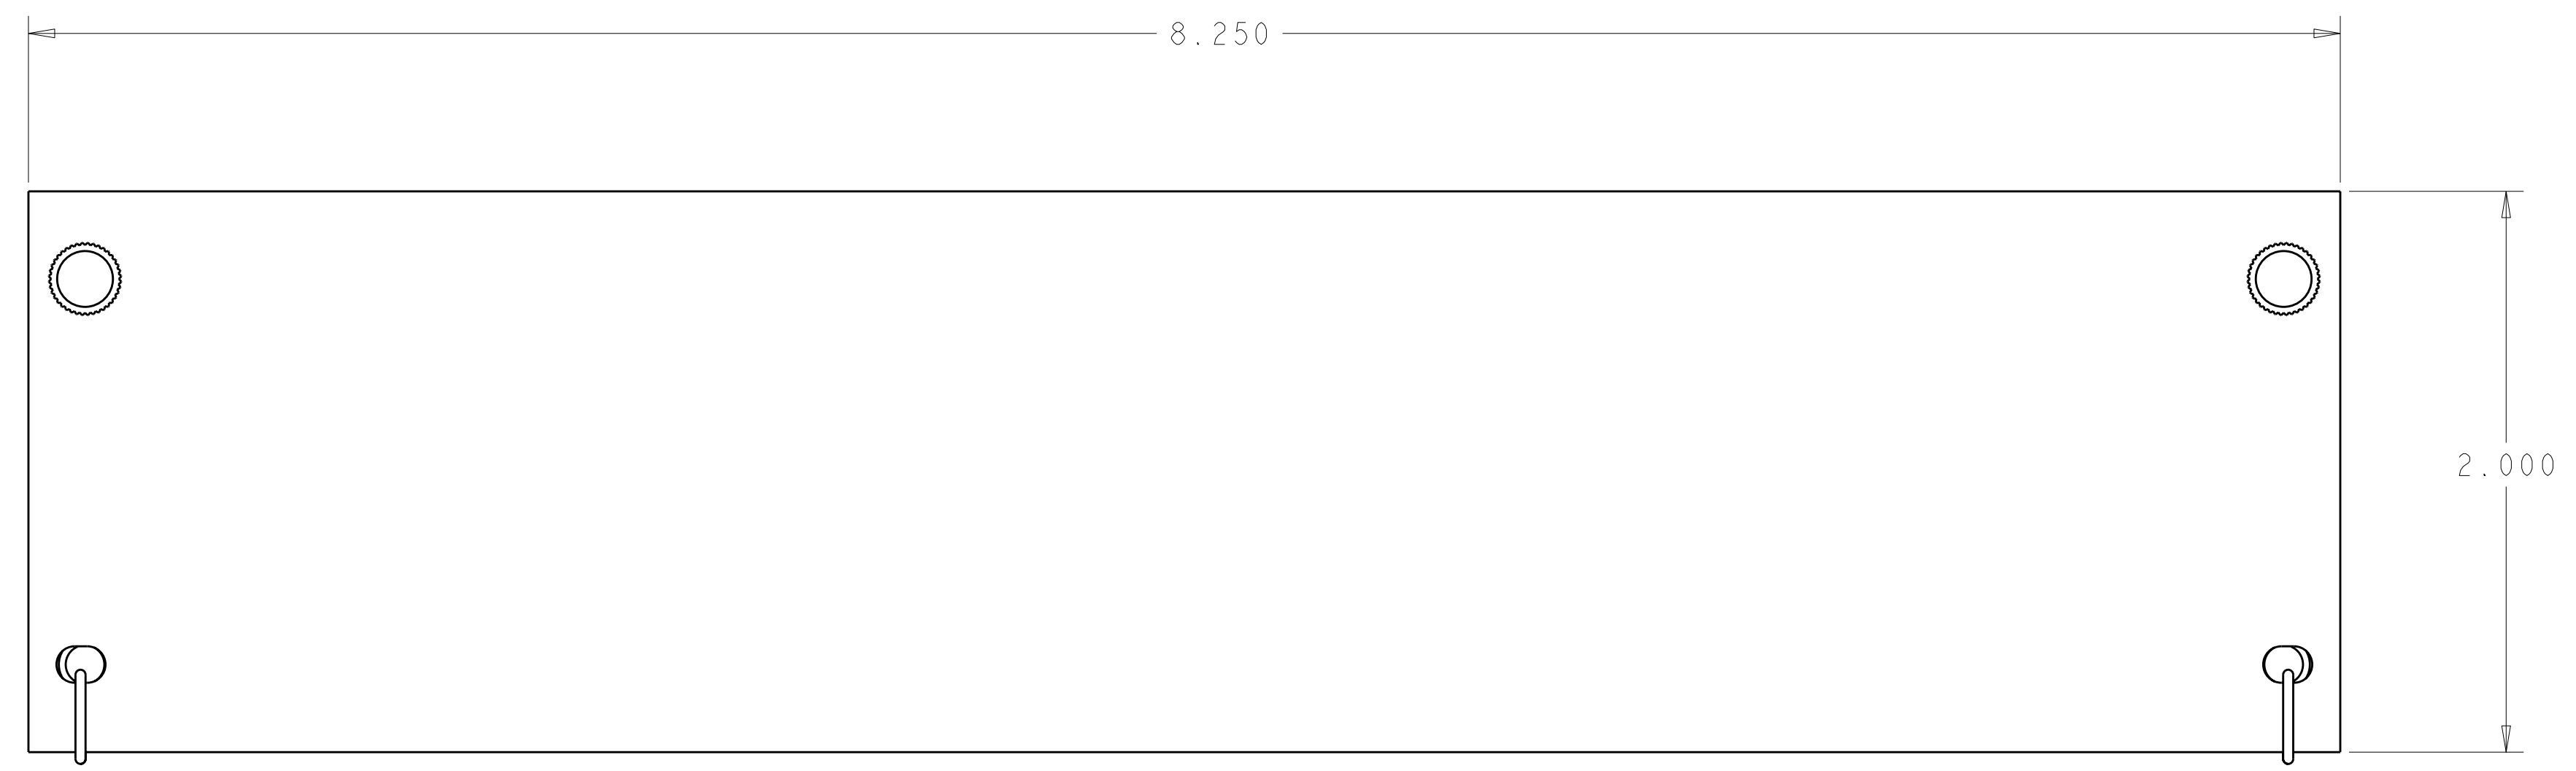

- ALL PARTS ASSEMBLED AS SHOWN.
 - WIRE RANGE: 14-18 AWG.
 - ELECTRICAL PROPERTIES:
 MAXIMUM CURRENT: 70A FOR A SINGLE #6 AWG WIRE
 OPERATING VOLTAGE: 600V
 - ENVIRONMENTAL PROPERTIES:
 CONTINUOUS TEMPERATURE: 150°C (302°F) MAX
 WATER ABSORPTION: (24 HRS %WT.GAIN): .45% PER ASTM D570
 CHEMICAL RESISTANCE: RESISTANT TO ACIDS, ALKALIES, AND ALIPHATIC HYDROCARBONS AND KETONES PER ASTM D543.
 RADIATION RESISTANCE (ERGS G⁻¹ (C)): 2.7 X 10⁸ MIN
 - .4375 MAX LUG WIDTH.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	NO OF CIRCUITS	PART NUMBER
12		1-1546245-2
8		1546245-8
6		1546245-6
4		1546245-4
2		1546245-2

DIMENSIONS: INCHES 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 9 PLC ±.1 1 PLC ±0.1 3 PLC ±0.02 5 PLC ±0.005 4 PLC ±0.0005 ANGLES ±.1 FINISH		DWN S.WELDON 28FEB2002 CHK S.YODER 28FEB2002 APVD S.YODER 28FEB2002 PRODUCT SPEC APPLICATION SPEC WEIGHT CUSTOMER DRAWING		Tyco Electronics Corporation Harrisburg, PA 17105-3608 NAME BLOCK ASSEMBLY, ONE PIECE .625 PITCH SIZE CAGE CODE DRAWING NO RESTRICTED TO A 00779 C=1546245 SCALE 2:1 SHEET 1 OF 1 REV B1	
---------------------------	--	---	--	---	--	--	--