SPECIFICATIONS

Material: HEXSEALS: Silicone rubber conforms to A-A-59588 Class 3,

GR 50 unless otherwise specified.

Mounting Nut: HEXSEALS: Brass, nickel-plated (unless otherwise

noted)

Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Exceeds 15 psi internal and 1500 psi external.

Operational Life: 50,000 actuations (minimum).

Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most


acids and lubricating oils

Agency Recognition: E-SEELS and HEXSEALS are UL-listed to UL

Std. 50 types 1-13, and meet CSA standards.

Installation: If a reducing adaptor is required - see page 14 of

HEXSEAL catalog HEX200 for part numbers and drawing.

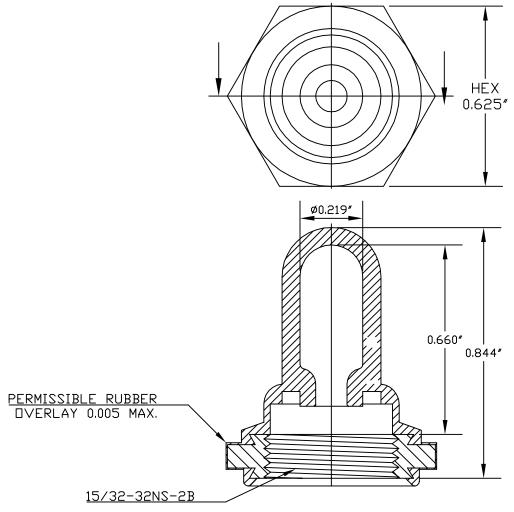

С	MAT'L CHANGED and REDRAWN				S. GOK	06.11.09
В	CAD COMPUTER GENERATED				09.19.02	
Α	MODIFIED R.C.				11.16.74	
REV.	DESCRIPTION				DATE	
	AND MINIMUM MEASURE- E STATED DIRECTLY ON	Ӵ BOOT, TOGGLE,	ENG.		S. GOK	06.11.09
EACH DIMENSION.		E TOTALLY ENGLOSING (N-1030)	DWN.		S. ANDREWS	12.09.59
MAT'L: Silicone Rubber			CHKD.		J. CELLA	06.11.09
A-A-59588, Gr.50		APM-HEXSEAL CORPORATION	SCALE	Š.	(N-1030 12)	
FINISH: Black			3 : 1	DWG.	HEXSEAL	,