
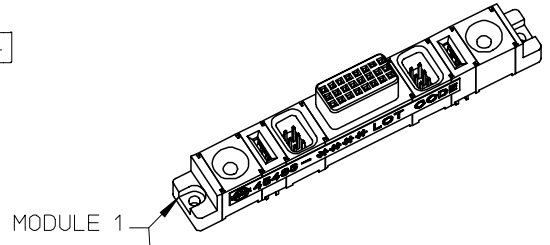
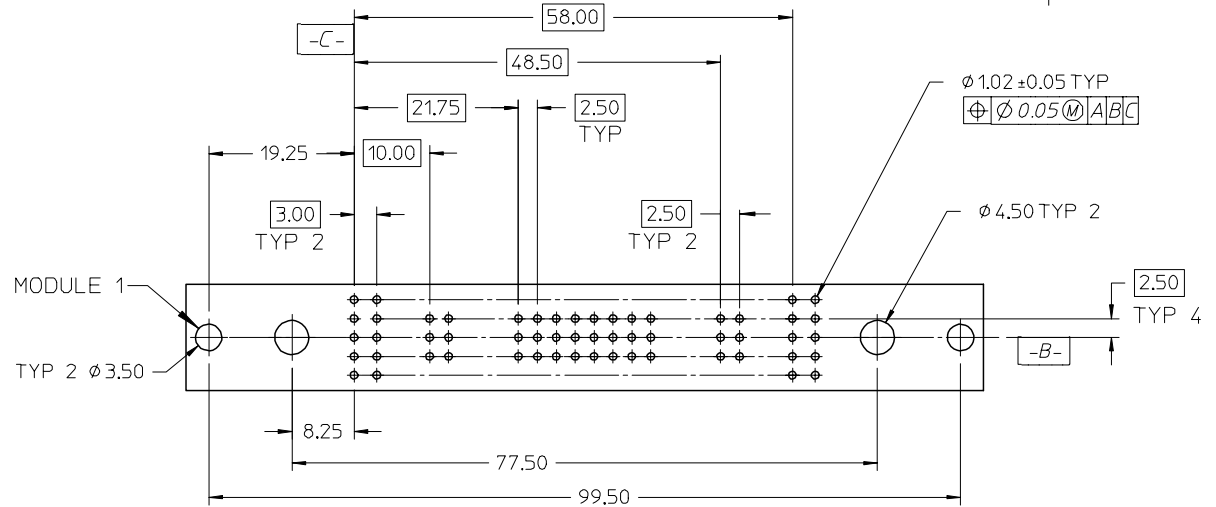


- NOTES:
1. MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.
CONTACTS: COPPER ALLOY
 2. FINISH: SELECT GOLD: 30 MI MIN.
SELECT TIN: 100 MI MIN.
BOTH OVER NICKEL.
 3. PRODUCT SPECIFICATION: PS-45424-001.
 4. PACKAGING SPECIFICATION: PK-45483-001.

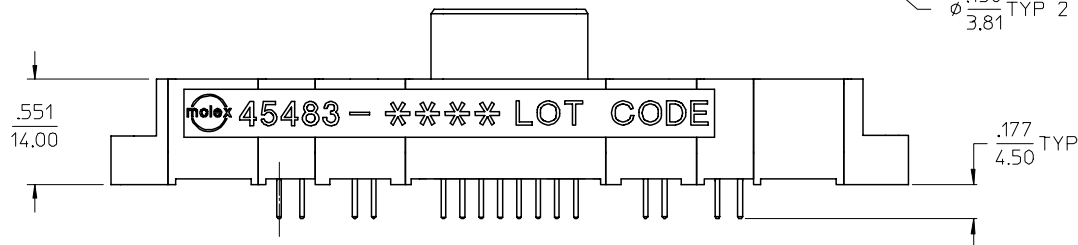

PD 500	PD 502	PD 100	PD 322	PD 301	PD 322	PD 100	PD 502	PD 501
--------	--------	--------	--------	--------	--------	--------	--------	--------

PCB LAYOUT: COMPONENT SIDE
PCB THICKNESS: .125/3.18
PCB TOLERANCE: ±.002/0.05

GEO TOL PCB
EC NO: UCP2005-1941
DRWN: ADRATNDZ005/05/03
CHKD: SAMEC 2005/05/03
APPR: YMARGULI2005/05/04

REV	DESCRIPTION
A1	

QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)	
		mm	INCH
		4 PLACES ± ---	± ---
		3 PLACES ± ---	± .010
		2 PLACES ± 0.25	± .015
		1 PLACE ± 0.38	± ---
		ANGULAR ± 1/2°	
		DRAFT WHERE APPLICABLE	
		MUST REMAIN WITHIN DIMENSIONS	

SCALE 1:1	DESIGN UNITS METRIC
DIMENSION STYLE IN/MM	
DRAWN BY SAMIEC	DATE 2003/11/03
CHECKED BY MARGULIS	DATE 2003/11/03
APPROVED BY MARGULIS	DATE 2003/11/03

THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
TITLE POWER DOCK ASSEMBLY SOCKET VERTICAL SOLDER TAIL	
molex MOLEX INCORPORATED	
MATERIAL NO. 45483-0008	DOCUMENT NO. SD-45483-008
SHEET NO. 1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	