


| ITEM | PART# | DESCRIPTION | QTY | UOM |
|------|------------|--------------------------------------|-----|-----|
| A | 5024390400 | 2.0 W/B Single Plug Hsg 4Ckt | 1 | PC |
| B | 5024380000 | 2.0 W/B Single Plug Term W/Plt Chain | 4 | PC |
| C | -- | WHITE PART ID LABEL | 1 | PC |

| FROM | TO | DESCRIPTION | COLOUR |
|------|----|--------------------------------|--------|
| A1 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A2 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A3 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |
| A4 | -- | 1X22AWG DISC SR-PVC BK UL10002 | BLACK |

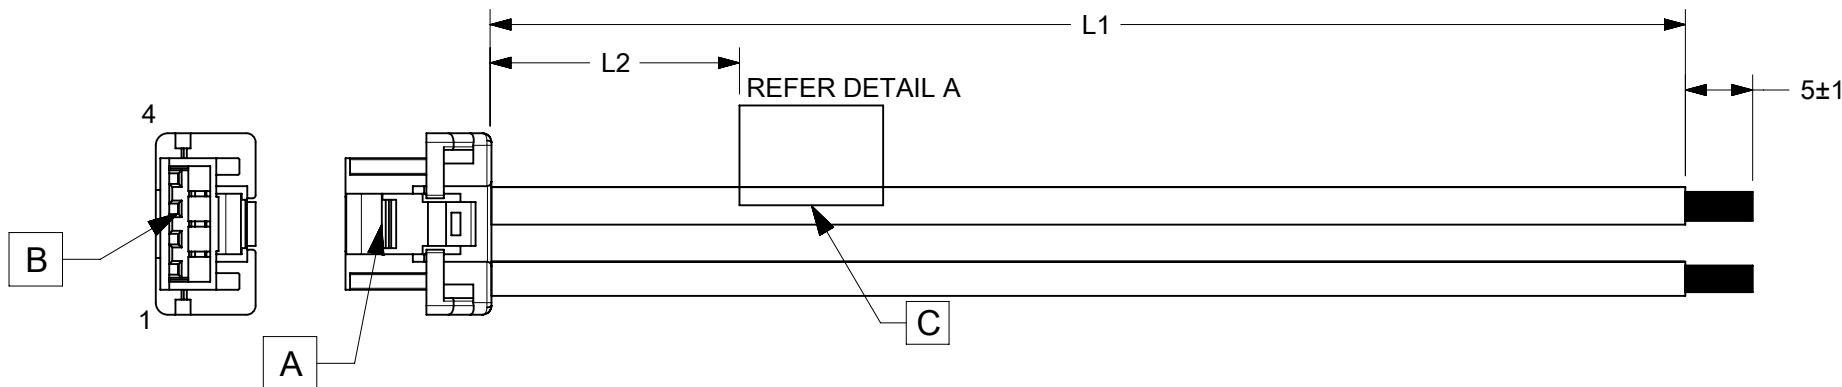

| PART NUMBER | TITLE | L1 | L2(REF) |
|-------------|--------------------------------------|-------|---------|
| 2219591040 | Clik-Mate 2.0 R-S 4ckt 50mm disc Sn | 50±5 | 15 |
| 2219591041 | Clik-Mate 2.0 R-S 4ckt 100mm disc Sn | 100±5 | 15 |
| 2219591042 | Clik-Mate 2.0 R-S 4ckt 150mm disc Sn | 150±5 | 15 |
| 2219591043 | Clik-Mate 2.0 R-S 4ckt 300mm disc Sn | 300±5 | 15 |
| 2219591044 | Clik-Mate 2.0 R-S 4ckt 600mm disc Sn | 600±5 | 15 |

MOLEX P/N
MOLEX
BATCH WK/YR

DETAIL A

NOTES

1. CABLE ASSEMBLY TO BE TESTED 100% FOR CONTINUITY AND POLARITY.
 2. CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
 3. LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
 4. LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.
 5. TINNING SHOULD BE DONE WITH LEAD FREE SOLDER BAR ONLY.
 6. FREE ENDS MUST BE STRIPPED, TWISTED & TINNED.
- THE LENGTH OF TINNING IS 5±1 MM. TINNING DIA MUST BE 0.9MM MAX.

REVISION

| DATE | REV | DESCRIPTION | CHANGER |
|------------|-----|-----------------|---------|
| 2022/02/12 | A | INITIAL RELEASE | THANUB |

| | | | | |
|-----------------|----|--------------|------------|----------|
| DOCUMENT STATUS | P1 | RELEASE DATE | 2022/12/23 | 12:42:18 |
|-----------------|----|--------------|------------|----------|

| | | | | | |
|--|---|--|-------------------|--------------------------|------------------|
| FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | CURRENT REV DESC: | | <p>SEE TABLE</p> |
| | DIMENSION UNITS | SCALE | EC NO: 732309 | | |
| mm | NTS | DRWN: THANUB 2022/12/02 | | | |
| GENERAL TOLERANCES (UNLESS SPECIFIED) | | CHK'D: SKUMAR07 2022/12/23 | | | |
| ANGULAR TOL ± ° | | APPR: SKUMAR07 2022/12/23 | | PRODUCT CUSTOMER DRAWING | |
| 4 PLACES ± | | INITIAL REVISION: | | DOCUMENT NUMBER | DOC TYPE |
| 3 PLACES ± | | DRWN: THANUB 2022/12/02 | | 2219591040 | PSD |
| 2 PLACES ± | | APPR: SKUMAR07 2022/12/23 | | 000 | A |
| 1 PLACE ± | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | MATERIAL NUMBER | CUSTOMER |
| 0 PLACES ± | | THIRD ANGLE PROJECTION | DRAWING | SERIES | SHEET NUMBER |
| | | | A4-SIZE | 221959 | 1 OF 1 |