
647676-7 - ACTIVE

#### **Economy Power**

TE Internal #: 647676-7 PCB Mount Header, Right Angle, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole -Solder, Economy Power

#### View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles

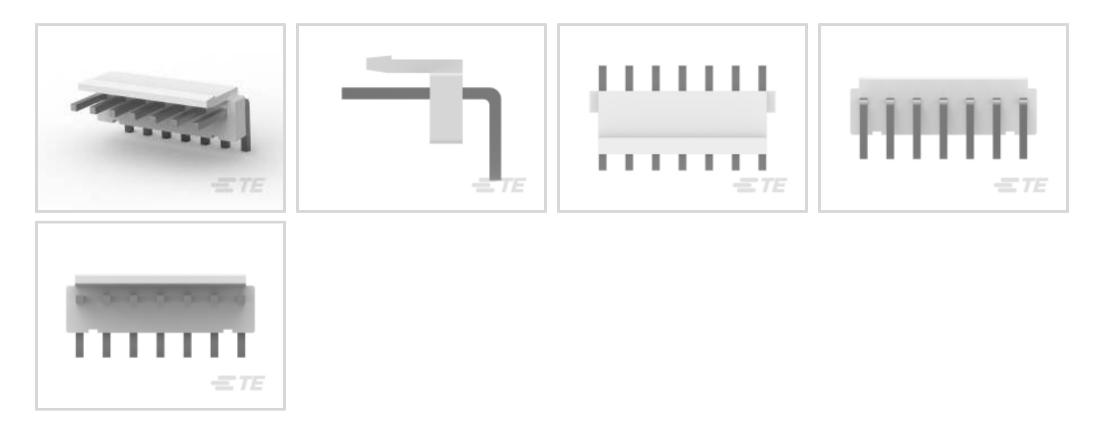

Connector System: Wire-to-Board

Number of Positions: 7

Number of Rows: 1

Centerline (Pitch): 3.96 mm [.156 in ]

PCB Mount Orientation: Right Angle

## Features

**E** 

## Product Type Features

Connector System	Wire-to-Board	
Header Type	Partially Shrouded	
Sealable	No	
Connector & Contact Terminates To	Printed Circuit Board	
PCB Connector Assembly Type	PCB Mount Header	
Configuration Features		
Connector Contact Load Condition	Fully Loaded	
Number of Positions	7	
Number of Rows	1	
PCB Mount Orientation	Right Angle	
Electrical Characteristics		
Operating Voltage	250 VAC	
Body Features		
Connector Profile	Low	

**C** For support call+1 800 522 6752

PCB Mount Header, Right Angle, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



Primary Product Color	White	
Contact Features		
Contact Mating Area Length	8.6 mm[.33 in]	
Mating Square Post Dimension	1.14 mm[.045 in]	
PCB Contact Termination Area Plating Material Thickness	2.03 μm[80 μin]	
Contact Layout	Inline	
Contact Mating Area Plating Material Thickness	2.03 μm[80 μin]	
Contact Shape & Form	Square	
Contact Mating Area Plating Material Finish	Matte	
PCB Contact Termination Area Plating Material	Tin	
Contact Base Material	Brass	
Contact Mating Area Plating Material	Tin	
Contact Type	Pin	
Contact Current Rating (Max)	7.5 A	
Termination Features		
Square Termination Post & Tail Dimension	1.14 mm[.045 in]	
Termination Post & Tail Length	3.6 mm[.146 in]	
Termination Method to Printed Circuit Board	Through Hole - Solder	
Mechanical Attachment		
Mating Alignment Type	Polarization	
Mating Retention	With	
Panel Mount Feature	Without	
Mating Retention Type	Latch	
Connector Mounting Type	Board Mount	
Mating Alignment	With	
PCB Mount Alignment	Without	
PCB Mount Retention	Without	
Housing Features		
Housing Material	Nylon 66	
Centerline (Pitch)	3.96 mm[.156 in]	
Dimensions		
	1.091 in	

PCB Mount Header, Right Angle, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



Connector Height	8.21 mm[.323 in]	
Connector Width	15.57 mm[.613 in]	
PCB Thickness (Recommended)	1.6 mm[.063 in]	
Usage Conditions		
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]	
Operation/Application		
Circuit Application	Power	
Industry Standards		
Glow Wire Rating	Standard Part - Not Glow Wire	
Agency/Standard	UL	
Approved Standards	UL E28476	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Quantity	500	
Packaging Type	Bag	

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	
Solder Process Capability	Wave solder capable to 265°C	

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

PCB Mount Header, Right Angle, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**



# Also in the Series | Economy Power




Power Contacts(8)	Rectangular Connector Housings(1)	Rectangular Power Connectors(302)	Wire-to-Board Connector Assemblies & Housings(142)

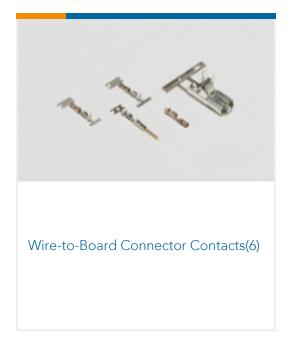

**Customers Also Bought** 

PCB Mount Header, Right Angle, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



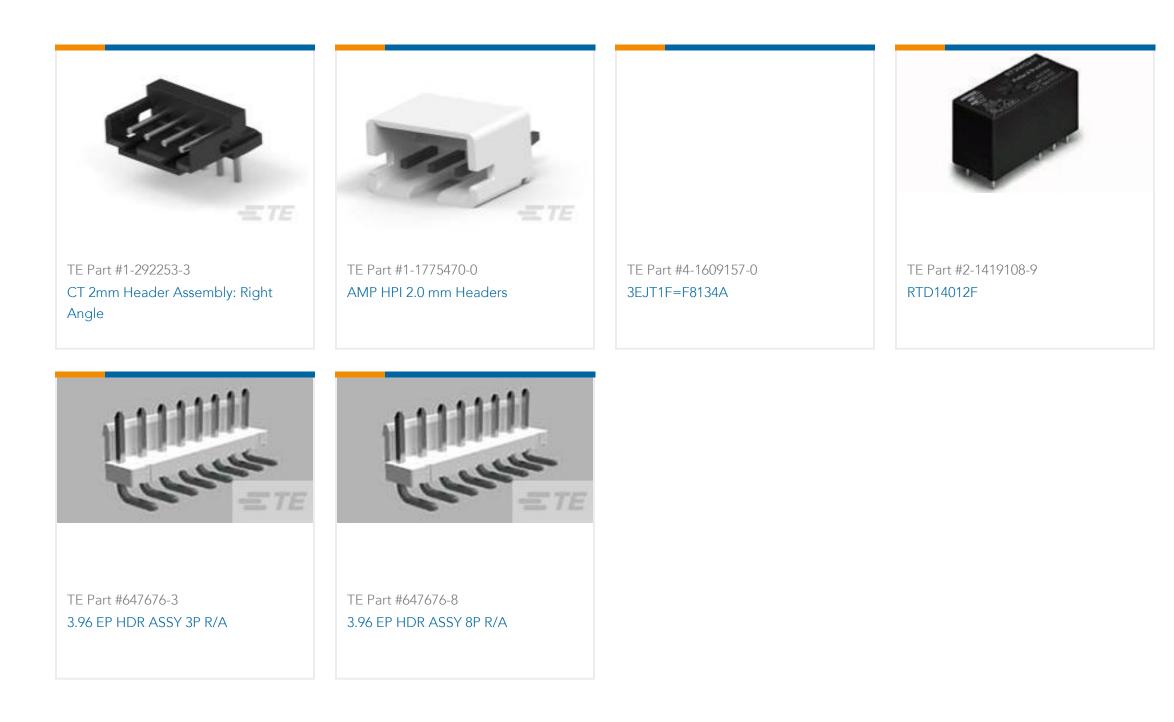

## Documents

Product Drawings 3.96 EP HDR ASSY 7P R/A

English

CAD Files Customer View Model ENG\_CVM\_CVM\_647676-7\_B.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_647676-7\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_647676-7\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773885-9 Economy Power Connectors

English

Product Specifications

Application Specification

English

**Application Specification** 

Japanese

PCB Mount Header, Right Angle, Wire-to-Board, 7 Position, 3.96 mm [.156 in] Centerline, Partially Shrouded, Tin, Through Hole - Solder, Economy Power



Agency Approvals UL Report English

UL Report

English