


PCB Layout, Component side

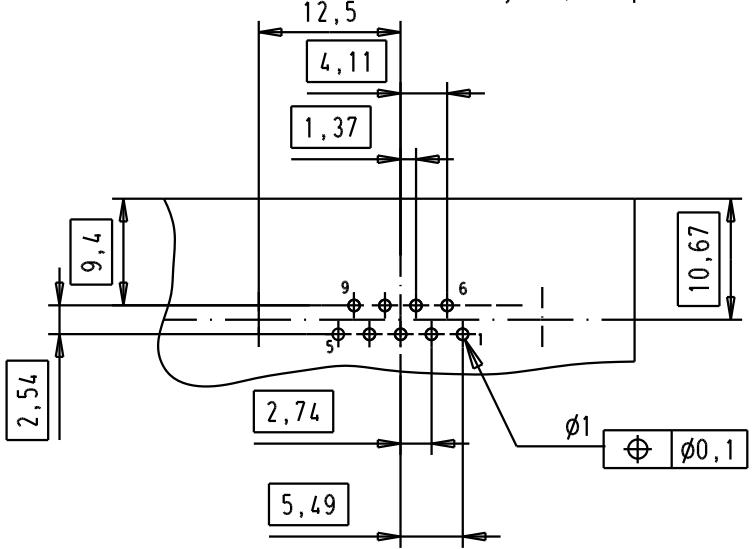

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	1000pf ± 20%
Working Voltage	100v
Current rating	7,5A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

D
C
B
A

09641247237	M3
09641247236	4-40UNC-2B
Part number	Nut thread

			Dat.	Name
			8-JUL-02	CV
31864	23/01/04	AF		
31058	8-JUL-02	CV		
Mod.	Dat.	Name		

Detail. Insp. Stand.

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

D-Sub, male, angled,
9 Poles, turned solder pin
tin plated shell and
metal bracket with nut

TB 0964124723x

Sub.

Ma?Ms lab/
Scale
1.5:1

Blatt/ Page
3 / 4