

## Printed-circuit board connector - PST 1,0/12-H-3,5 - 1737116

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Header, Nominal current: 8 A, Rated voltage (III/2): 250 V, Number of positions: 12, Pitch: 3.5 mm, Color: Black, Contact surface: Tin, Assembly: Soldering, The maximum current depends on the plug used. The lower of the two current values apply for plug and pin strip. The pin strip is made of highly temperature resistant plastic and is thus suitable for the reflow process.




The figure shows a 10-position version of the product

### Product Features

- Various pin lengths and pin geometries available on request
- Pin strip with pad pushed on for suction pipette for optional tape-on-reel packing
- 3.5 mm pitch
- Pin strip available in machine-capable packaging (tube magazine or tape)
- Optimum pin geometry so as to not damage the plug
- Reflow solderable pin strip, optimized for COMBICON compact plug-in connectors



### Key commercial data

Packing unit	1 PCE
Minimum order quantity	50 PCE
GTIN	 4 046356 183529
Custom tariff number	85366990
Country of origin	GERMANY

### Technical data

#### Dimensions / positions

Length	10.5 mm
Pitch	3.5 mm
Dimension a	38.5 mm
Number of positions	12
Pin dimensions	1 mm

## Printed-circuit board connector - PST 1,0/12-H-3,5 - 1737116

### Technical data

#### Dimensions / positions

Hole diameter	1.2 mm
---------------	--------

#### Technical data

Range of articles	PST 1,0/...-H
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/2)	250 V
Rated voltage (II/2)	250 V
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	8 A (depends on the plug used)
Nominal voltage $U_N$	160 V
Maximum load current	8 A (depends on the plug used)
Insulating material	PA
Inflammability class according to UL 94	V0
Color	Black
Nominal voltage, UL/CUL Use Group B	300 V
Nominal current, UL/CUL Use Group B	10 A

### Classifications

#### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

#### UNSPSC

UNSPSC 11	34131203
UNSPSC 12.01	39121432
UNSPSC 13.2	39121432
UNSPSC 6.01	30211801
UNSPSC 7.0901	39121432

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701

# Printed-circuit board connector - PST 1,0/12-H-3,5 - 1737116

## Classifications

### eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402

## Approvals

### Approvals


#### Approvals


UL Recognized / cUL Recognized / GOST / GOST / cULus Recognized


#### Ex Approvals

#### Approvals submitted

## Approval details


UL Recognized 	
	B
Nominal current I <sub>N</sub>	10 A
Nominal voltage U <sub>N</sub>	300 V

cUL Recognized 	
	B
Nominal current I <sub>N</sub>	10 A
Nominal voltage U <sub>N</sub>	300 V

GOST 	
--	--


# Printed-circuit board connector - PST 1,0/12-H-3,5 - 1737116

## Approvals



## Drawings

Drilling diagram

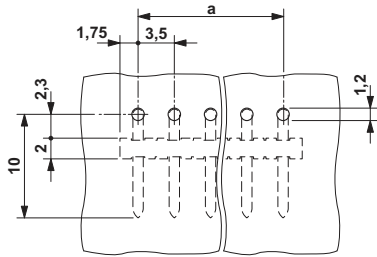

Dimensioned drawing

