


mat'l. code				surface <input checked="" type="checkbox"/> ISO 1301 <input type="checkbox"/> tolerance <input checked="" type="checkbox"/> ISO 406 <input type="checkbox"/> ISO 1101		projection		product family MOD JACK		
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title		
E	M04-0174	MTH	8/17/04	angled	0.X±0.3	mm		R/A CAT5 GANG JACK ASSY		
F	M04-0187	MTH	10/06/04	parallel	0.XX±0.13	mm		8 POS UNSHIELDED SNAP PEG		
G	M05-0067	MTH	4/8/05	0±2°	0.XXX±0.051	scale 1.0		dwg no		
H	N06-0036	DT	2/9/06	dr	L.POTTEIGER	8/30/95	sheet 1 of 2 size			
J	ELX-N-007926	SH	2011-11-18	eng	Y.BELOPOLSKY	8/30/95	95679			A4
K	ELX-N-011015	SH	03/27/12	chr	Y.BELOPOLSKY	8/30/95	type			Product Customer Drawing
L	ELX-N-45280	JF	7/06/22	app	Y.BELOPOLSKY	8/30/95				
sheet index	revision	L	L							
	sheet	1	2							

PRODUCT No.	PORTS No	DIM A <sup>+0.60</sup> / <sub>-0.00</sub>	DIM B ±0.20	DIM C ±0.10	DIM D ±0.15	COMMENT
95679-X01/X01LF	1	15.24	-----	5.715	11.43	
95679-X02/X02LF	2	30.48	13.97	12.700	25.40	
95679-X03/X03LF	3	44.45	27.94	19.685	39.37	
95679-X04/X04LF	4	58.42	41.91	26.670	53.34	
95679-X05/X05LF	5	72.39	55.88	33.655	67.31	
95679-X06/X06LF	6	86.36	69.85	40.640	81.28	
95679-X06P/X06PLF						NOTE 4
95679-X07/X07LF	7	100.33	83.82	47.625	95.25	
95679-X08/X08LF	8	114.30	97.79	54.610	109.22	
95679-X09/X09LF	9	128.27	111.76	61.595	123.19	NO MOULD
95679-X10/X10LF	10	142.24	125.73	68.580	137.16	NO MOULD
95679-X11/X11LF	11	156.21	139.70	75.565	151.13	NO MOULD
95679-X12/X12LF	12	170.18	153.67	82.550	165.10	NO MOULD

NOTES:

1. APPLICABLE PC BOARD THICKNESS: 1.6 mm.
2. CONTACTS: PHOSPHOR BRONZE ALLOY UNS-C51000, Ø0.460 ROUND WIRE, PLATING SEE TABLE.
3. CENTER PEG FOR 8 PORT AND ABOVE.
- ④ OPTIONAL CENTER PEG IN PORT 6 (95679-X06PLF) WITH CENTER PEG (95679-X06LF) WITHOUT CENTER PEG
- ⑤ PART NUMBERS WITH LF IN THE END ARE LEAD FREE.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AN OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
5. THE HOUSING TEMPERATURE WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5 MM MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- ⑥ PLATING OPTION: MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.
7. PRODUCT SPECIFICATION GS-12-083  
PACKAGING SPECIFICATION GS-14-361

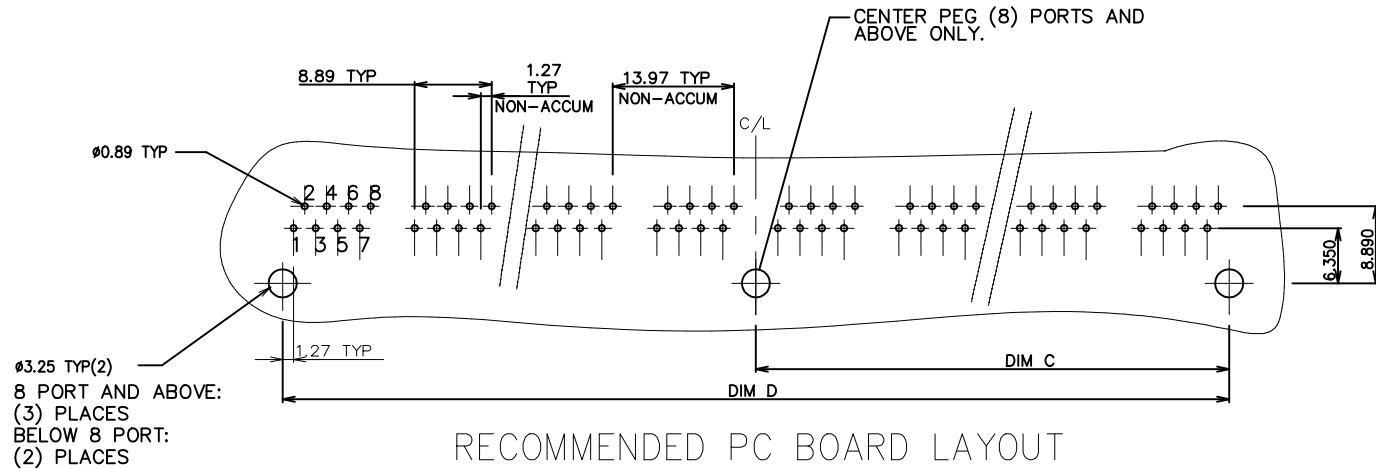

PLATING CODE X	PLATING ⑥
0	5u" Au + high performance lubricant
1	15u" GOLD.
2	15u" G.X.T.
3	5u" Au + high performance lubricant
5	50u" GXT.

mat'l. code		surface	tolerance	projection	product family
ISO 1301		ISO 406	ISO 10101		MOD JACK
litr		tolerances unless otherwise specified		MM	title
ecn no		angle		MM	R/A CAT5 GANG JACK ASSY
dr		0°±2'		scale 1.0	8 POS UNSHIELDED SNAP PEG
date		0.X±0.3			dwg no
L		0.XX±0.13			sheet 2 of 2 size
app		0.XXX±0.051			95679
L.POTTEIGER		8/30/95			A4
eng		Y.BELOPOLSKY		type Product Customer Drawing	
chr		Y.BELOPOLSKY			
app		Y.BELOPOLSKY			
8/30/95					
sheet index	revision sheet				