Materials
Shell: brass, nickel plated
Cable: stranded steel

Environmental requirements
Waterproof: IP67 when mating with corresponding (IP67) socket connector

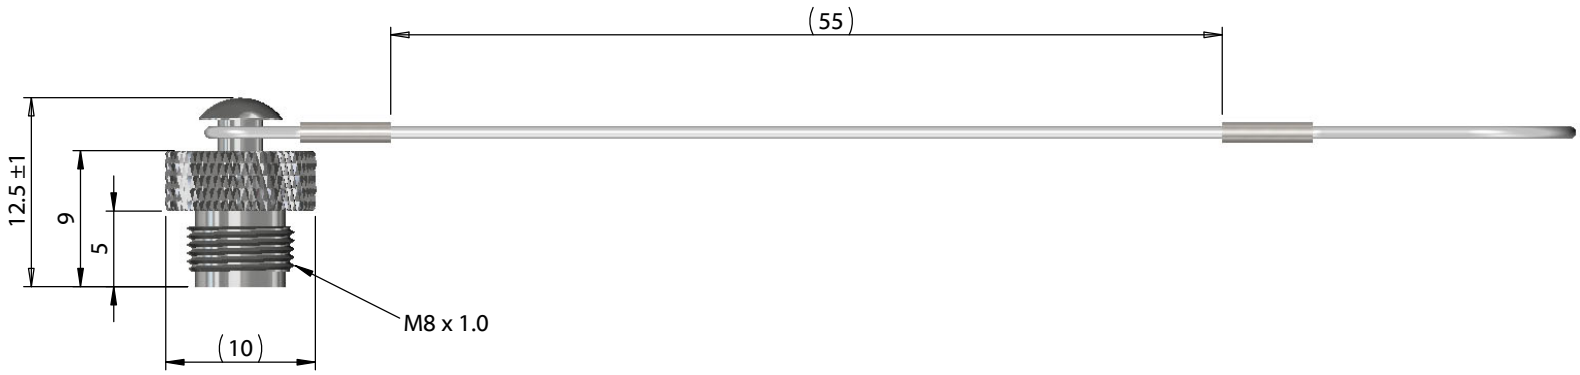

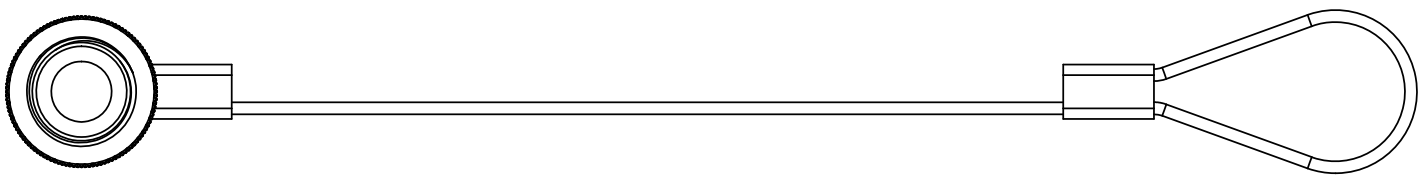

Revision:	Date:	Description:
A	9/14/2022	Initial release

Prepared: MP Digitally signed by MP Date: 2022.09.15 12:30:09 -07'00'

Verified: JD Digitally signed by JD Date: 2022.09.15 12:34:39 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cap, M8 socket with leash, Ø10xL12.5 mm, brass, nickel plated

TENSILITY
tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A
Part number: 55-00180
Scale: 2:1
Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1