



FEMALE END VIEW



- 1. VT
- 2. RD
- 3. GY
- 4. RD/BU
- 5. GN
- 6. BU
- 7. GY/PK
- 8. WH/GN
- 9. WH/YE
- 10. WH/GY
- 11. BK
- 12. GN/YE
- 13. YE/BN
- 14. BN/GN
- 15. WH
- 16. YE
- 17. PK
- 18. GY/BN
- 19. BN

HARTING P/N	Type of cable	Cable length(mm)
21373600D75050	PVC	5000 ⁺²⁰⁰ ₋₀
21373600D75100	PVC	10000 ⁺⁴⁰⁰ ₋₀

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT/WHITE
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/COLOR	BRASS/SILVER
COUPLING NUT MATERIAL/PLATING	ZINC ALLOY/NICKEL
RATED CURRENT	9A(PINS 6,12,19),2A(ALL OTHERS)
RATED VOLTAGE	150 V
OUTER CABLR JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS (AWG)	3X18AWG+16X22AWG
OPERATING TEMPERATURE	-40°C — +80°C
PROTECTION CLASS	IEC IP67

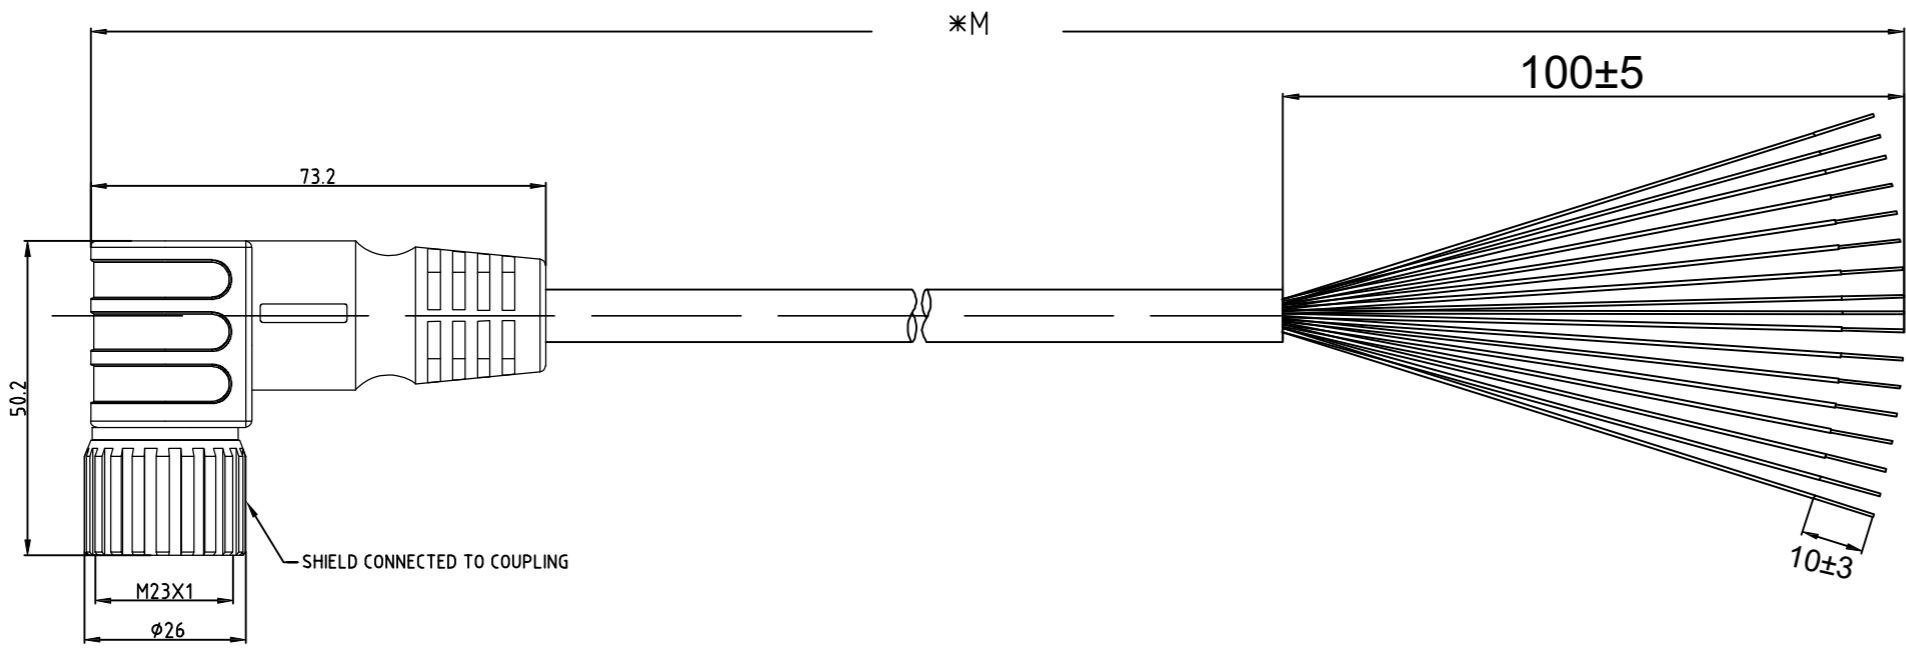

	All rights reserved Department HCS - CN	Created by LINI	Inspected by LIANL	Standardisation LIANL	Date 2021-11-02	State Final release	Doc-Key / ECM-Nr. /
HARTING Customised Solutions D-32339 Espelkamp		Title M23_19P FE,Int-thread,ANG PVC cable,xxM		Type TB		Number 2137 36 00 D 75 XXX	
All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	

A	First issue.	Ivy Lin	11/02/22
Rev.	Description	Appr.	Date