
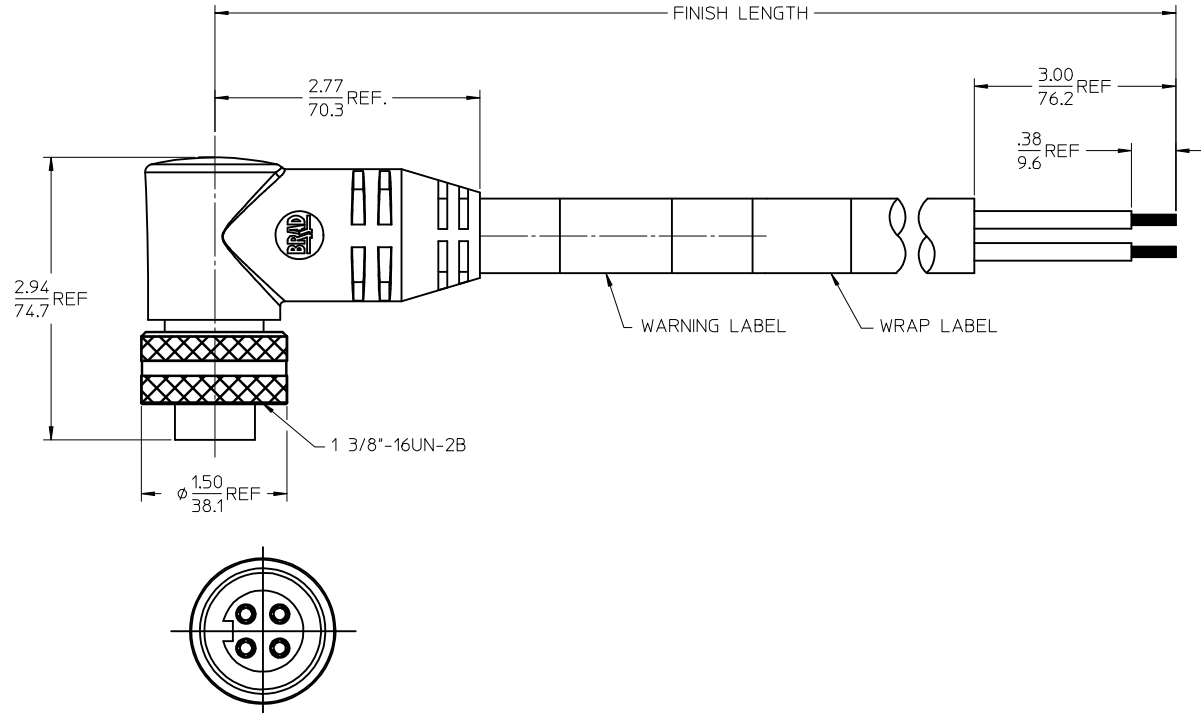


POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300630037	C03001A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300630135	C04001A48M020	32	2M +89-0MM (6'7"+3.50-0)

FACE VIEW-FEMALE INSERT  
3 POLE      4 POLE

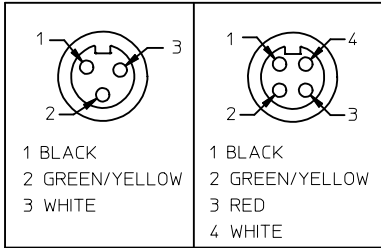

SPECS:  
OVERMOLD: GRAY PVC  
INSERT: BLACK PVC  
COUPLING NUT: ANODIZED ALUMINUM  
CABLE: #10AWG GRAY PVC  
DUAL RATED UL TC/OPEN WIRING & ST00W  
ELECTRICAL: 600V AC/DC

UPDATED PROFILE EC NO: IPG2014-1160 DRWNG:GGUSTAFSON 2013/12/23 CHKD:VOU 2014/01/15 APPR:BMWOODMAN 2014/05/12	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM	SCALE 1:2	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± 0.13 ± .010 1 PLACE ± 0.25 ± .020 ANGULAR ± 1/2°	mm INCH ± --- ± --- ± .005 ± 0.13 ± .010 ± 0.25 ± .020	DRAWN BY DATE B. RUPERT 01/12/2010	CHECKED BY DATE B. WOODMAN 01/12/2010	APPROVED BY DATE JFMURPHY 2010/01/15	TITLE QUICK CHANGE FEMALE 90 DEGREE 3 & 4 POLE PORTABLES MOLEX INCORPORATED	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-130063-037	SHEET NO. 1 OF 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				