

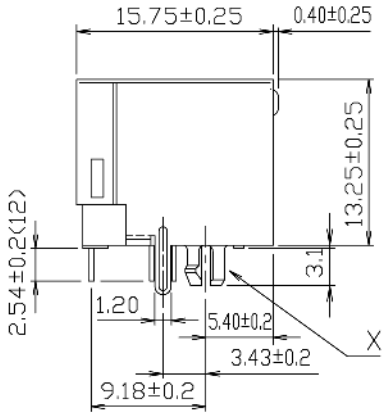



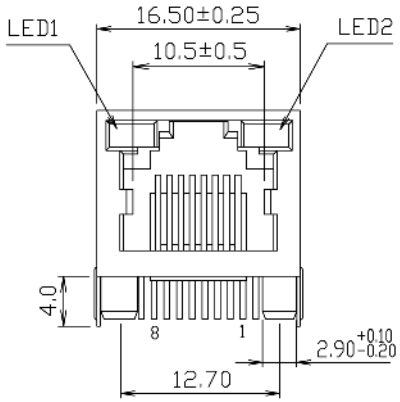



DETAIL X

MATERIALS:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
  HEAT DEFLECTION TEMP.290°
  BLACK COLOR,UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
  WITH HARD GOLD AND GOLD FLASH IN
  SOLDER AREA.
- SHIELD-0.25mm THICK COPPER ALLOY,
  PLATED WITH NICKEL.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

Temperature resistance up to 260°C for 5 seconds.

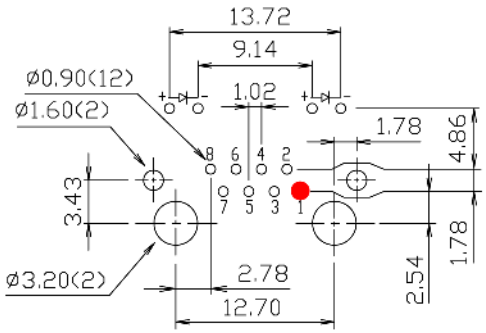

PCB LAYOUT
Ref.

Ordering Information

AJT34L	8	8	1	X	-	0	X	X
Type	Positions	Contacts	Ports	Plating 1 = 6u" 3 = 30u"				Tabs 0=No Shield 1=No Tabs 2=Top Tabs 3=Side Tabs 4=Top & Side Tabs

	LED1	LED2
1=	Yellow	Green
2=	Green	Green
3=	Green	Yellow
4=	Green	Orange

	LED1	LED2
5=	Green	Red
6=	Red	Green
7=	Yellow	Yellow
8=	Grn/Ylw	Grn/Ylw
9=	Red/Grn	Red/Grn

● = Pin 1

Tolerance
unless otherwise specified
mm
.0 ± .25
.00 ± .13
.000 ± .05

METZ CONNECT

P/N: AJT34L881X-0XX

Desc.: Side entry, shielded, LED, thru hole modular jack

Date: 9-1-09
Dimensions in mm