


1 2 3 4 5 6

A


B

C

D

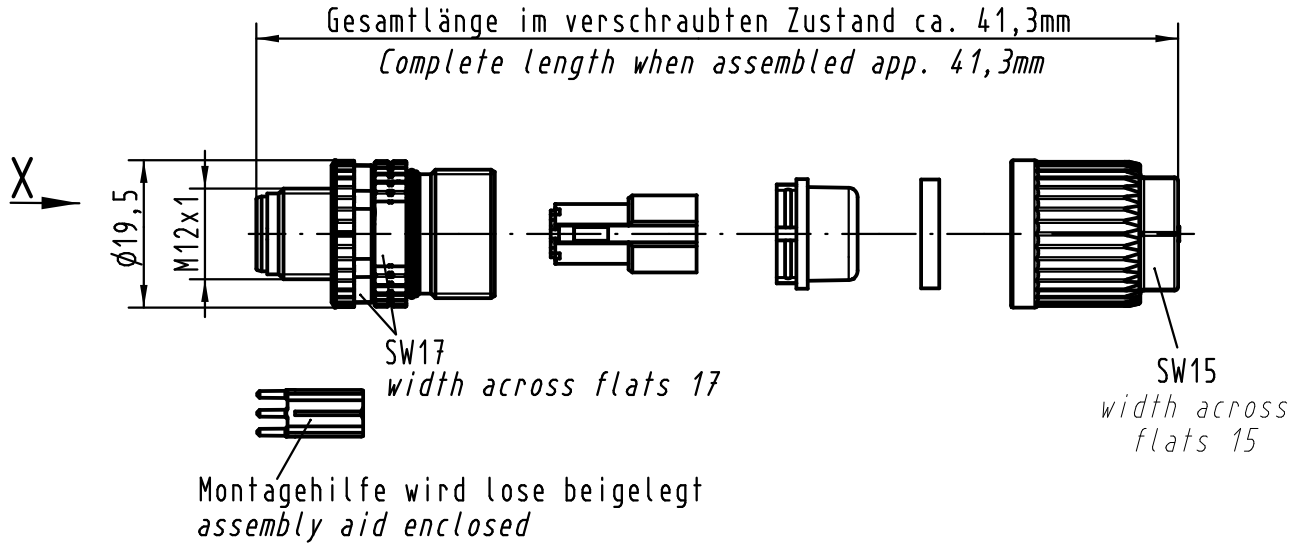


X (2:1)



Steckgesicht n.
Contact face acc. to
IEC 61076-2-101

Crimpkontakte separat bestellen
Order contacts separately

Kabel ϕ / Cable ϕ	Leiterquerschnitt Wire gauge	Bestell-Nr. Part-No.
5,5-7,2mm		
Dichtung / Sealing	AWG 26-22	09 67 000 5576
schwarz / black	AWG 24-20	09 67 000 8576

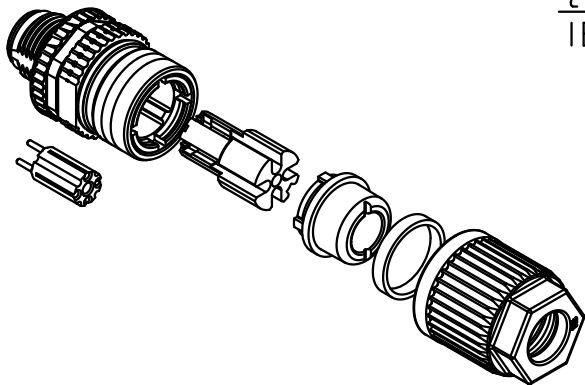

All Dimensions in mm Original Size DIN A 4			Techn. Character.			Nicht tolerierte Maß/Free size tolerances		
EC04038	11.11.11	DY		Dat.	Name	Maßstab/Scale 1:1	M12-L RSV geschirmt, Stift, D-kodiert, 4-polig, crimp Circular Connector shielded, male, D-coded, 4-pole, crimp	
EC03244	20.05.11	DY	Detail.	15.10.08	DY			
EC02560	15.11.10	DY	Insp.		SR			
EC01106	23.11.09	DY	Stand.					
414337	17.06.09	DY	HARTING Electronics GmbH & Co. KG				TB 21 03 882 1406	
414236			D-32339 ESPELKAMP					
Mod.	Dat.	Name				Sub.	Blatt/ page	