
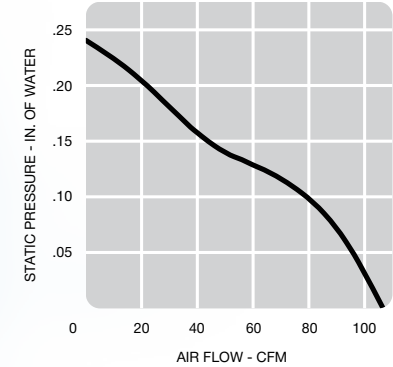


UF12AMR series

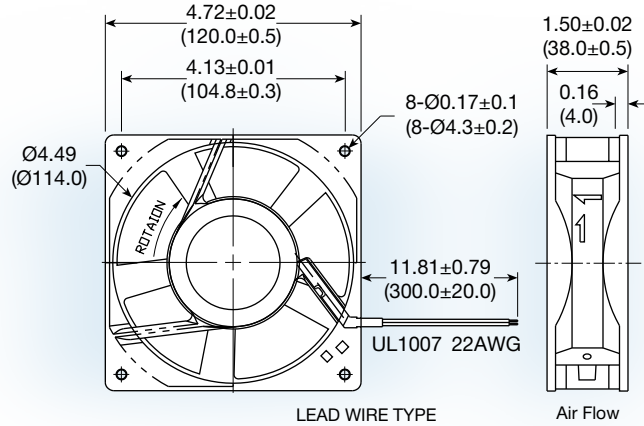

(120 x 120 x 38 mm)

4.72 x 4.72 x 1.50 inches

Features: high temp; -40°C ~+90°C, operating temperature range

Operating Voltage: 115 or 230 VAC

Construction: aluminium die cast frame; metal impeller


Bearing option: ball bearing with high temp lubricant

Motor: shaded pole - Class F insulation

Air Flow: air intake over struts

Connection: terminal or 22 AWG lead wire

Protection: impedance



| Model No. | Rated Voltage V | Freq. HZ | Input Power W | Rated Cur. A | Speed RPM | Air Volume | | Max. Sta tic Pressure (H ₂ O) | | Sound Noise dB _A | Wt . g |
|------------------|--------------------|-------------|------------------|-----------------|--------------|----------------------|-----|--|------|--------------------------------|-----------|
| | | | | | | M ³ /Min. | CFM | MM | INCH | | |
| UF12AMR12 | 115 | 60 | 16 | 0.19 | 2,950 | 3.00 | 106 | 6.1 | 0.24 | 51 | 550 |
| UF12AMR23 | 230 | 60 | 18 | 0.11 | 2,950 | 3.00 | 106 | 6.1 | 0.24 | 51 | 550 |

