

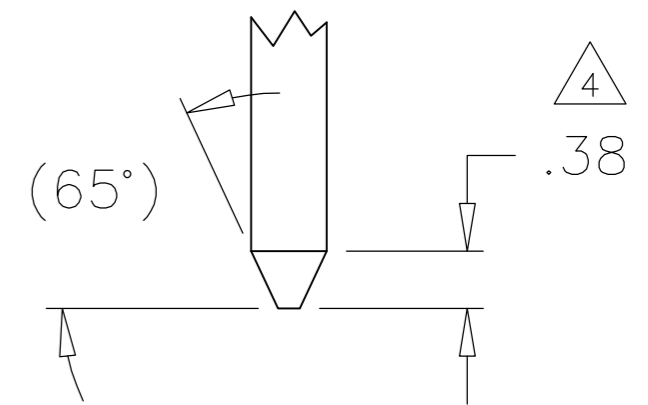
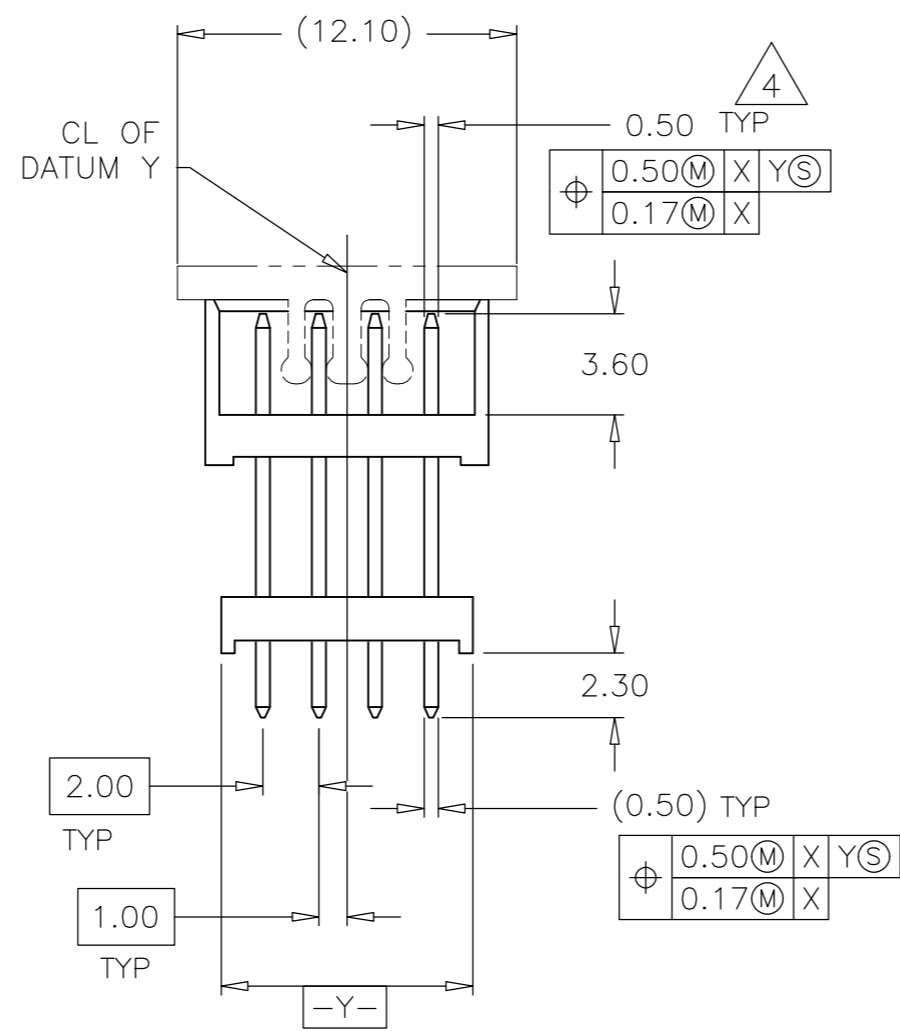
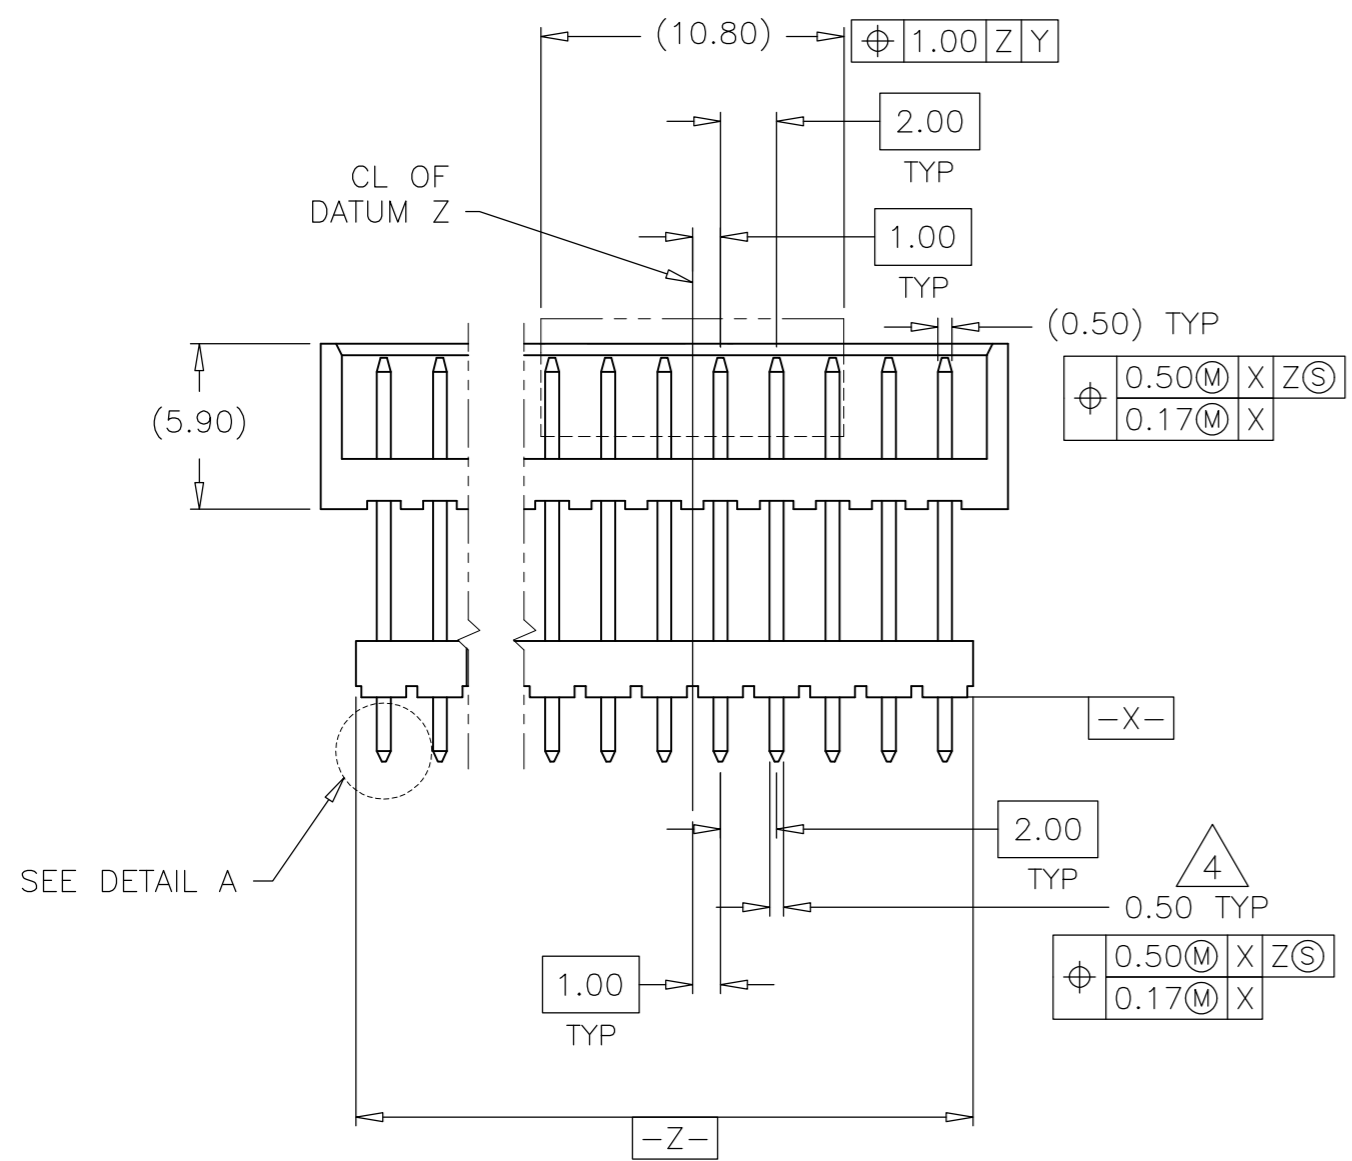


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		K		REVISED PER ECO-11-012012	29AUG11	HMR	JO

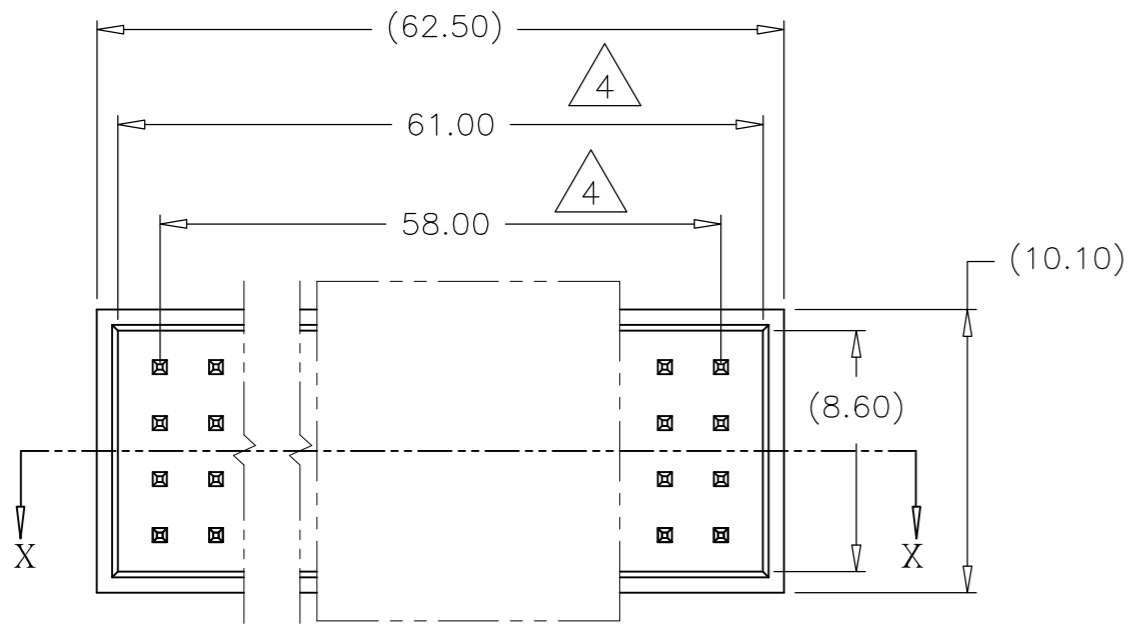

DETAIL A
SCALE: 3:1

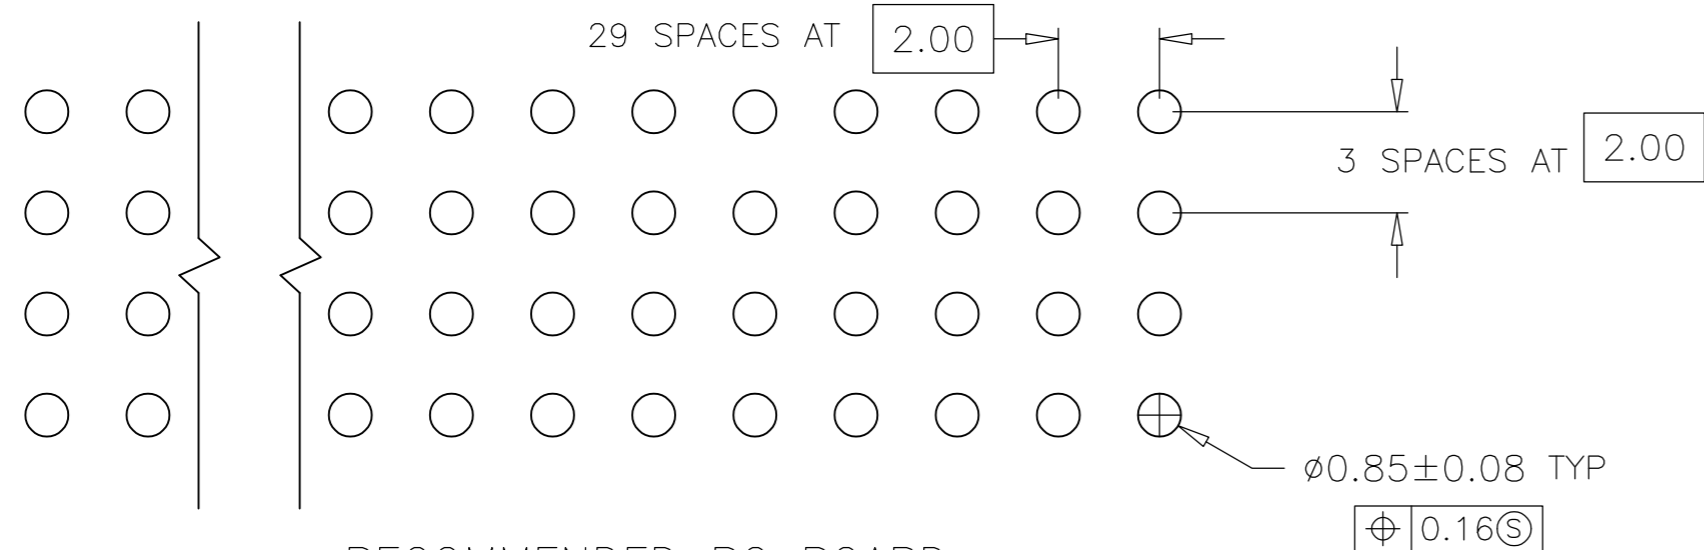

RECOMMENDED PC BOARD
HOLE LAYOUT

TOLERANCES NOT TO ACCUMULATE WITHIN
ONE CONNECTOR PATTERN.

1. SPECIFICATIONS-

CONTACT MATERIAL: PHOSPHOR BRONZE,
VACUUM CAP & INSULATOR MATERIAL: HIGH TEMPERATURE THERMOPLASTIC, LCP

PACKAGING: TAPE AND REEL PER EIA-481

- 2 CONTACT FINISH: DUPLEX PLATED 0.000762 GOLD ON CONTACT AREA, TIN-LEAD ON SOLDER LEADS
- 3 CONTACT FINISH: DUPLEX PLATED 0.000762 GOLD ON CONTACT AREA, 0.00381 TIN ON SOLER LEADS 0.00127 NICKEL UNDERPLATING
- 4 CRITICAL TO QUALITY

SUPERSEDED BY 5-1571556-1

3	120	5-1571556-1
2	120	1571556-1
FINISH	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	R BROWN	18MAR04	TE Connectivity		
DIMENSIONS: mm		CHK	D SIMPSON	18MAR04			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	D SIMPAON	18MAR04	NAME		
0 PLC ± -		PRODUCT SPEC		108-2273-1			
1 PLC ± 0.25		APPLICATION SPEC		114-13177			
2 PLC ± 0.25		WEIGHT		-			
3 PLC ± -		SIZE		A2			
4 PLC ± -		CAGE CODE		00779			
ANGLES ± 4°		DRAWING NO		C=1571556			
FINISH		RESTRICTED TO		-			
-		SCALE		1:1			
-		SHEET		1 of 1			
-		REV		K			