


REVISIONS REV ECN, ERN NO. DATE APPRD. Α PRODUCT DRAWING (EAR 13448) JAN15/09 L.C. PRODUCT DRAWING (EAR 14867) NOV18/20







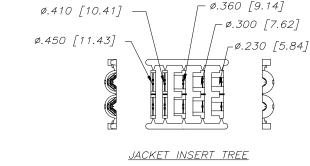







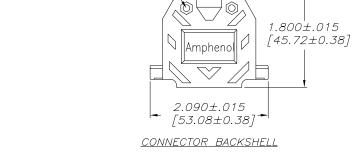

NOTES:

2 MOUNTING HOLES

AND CAPTIVE CREWS

FOR SADDLE WASHERS

2 HOLES FOR MACHINE SCREWS

AND HEX NUTS

- 1) EACH BACKSHELL KIT CONTAINS 2 SHELL HALVES. 1 JACKET INSERT TREE AND 2 OF EACH HARDWARE ITEM SHOWN.
- 2) BACKSHELL IS SUITABLE FOR SUBMINIATURE D CONNECTOR, B SIZE SHELL (25 POSITION STANDARD CONTACTS OR 44 POSITION HIGH DENSITY CONTACTS).

-ø.522 [13.26]

1.857±.015 _ [47.17±0.38]

- 3) JACKET INSERTS ARE DESIGNED FOR A CABLE DIAMETER RANGE OF .230 [5.84] TO .450 [11.43]. REMOVE THE SUITABLE INSERT FROM THE TREE AND INSTALL IT INTO THE CABLE CLAMP PORTION OF THE BACKSHELL.
- 4) MATERIALS ALL MATERIALS ARE ROHS COMPLIANT SHELL - THERMOPLASTIC, UL FLAMMABILITY RATING UL94V-0, BLACK, TOLERANCE: ±.015 [0.38] INSERT TREE - POLYPROPYLENE HOMOPOLYMER, BLACK, TOLERANCE: ±.010 [0.25] HARDWARE - STEEL, ZINC PLATED, TRIVALENT CHROMATE FINISH

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.



	DRAWN DAVIE.W	DATE JAN14/09	Amphenol Canada Cor			
	DESIGNED				•	
	CHECKED L. CHAN	JAN15/09	17E SERIES D-SUB CONNECTOR BACKSHELL,			
	I. E. APPRD.		B SIZE SHELL (25 STD OR 44 HD CONTACTS)			
	Q. A. APPRD.			PIECE, PLASTIC, STRAIGHT EXIT,		
	DWG. APPRD.		#4-40 THREAD, ROHS COMPLIANT			
)	ENG. REL. NO. <i>EAR</i> 13448		DWG	DRAWING NO.	REV.	
	REF.		C	P-17E-1726-1		
		DE ID. NO. 13554	SCALE	1/1 WT SURF SHEET 1 OF 1	1	

С