
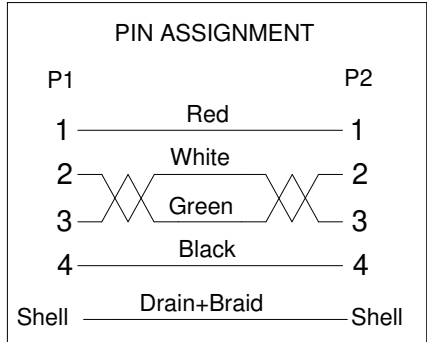


① Cable White print
 AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
 ---c AWM I/II A 80°C 30V FT1 USB CABLE

- Electrical test:
- 100% short, open, miss wire test
 - Conduct resistance: 2 Ohm max.
 - Insulator resistance: 5Mohm min.
 - Dielectric test: DC 300V

| WSW P/N | Jacket color | Length(mm) |
|--------------------|--------------|------------|
| ③ AK669/2-03-BLACK | Black | 300±15 |
| ② AK669/2-05-BLACK | Black | 500±15 |
| ③ AK669/2-10-BLACK | Black | 1000±30 |
| ③ AK669/2-15-BLACK | Black | 1500±40 |

| WSW P/N | Jacket color | Length(mm) |
|------------------|--------------|------------|
| AK669/2-18-BLACK | Black | 1800±50 |
| AK669/2-30-BLACK | Black | 3000±50 |
| AK669/2-50-BLACK | Black | 5000±50 |

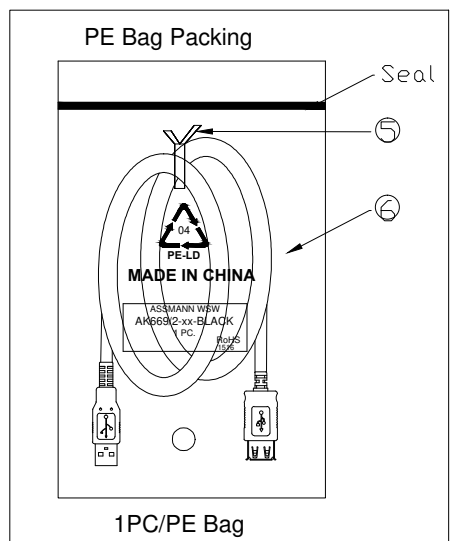

| NO. | NAME. | Q'TY | SPECIFICATION |
|-----|--------------|------|---|
| ⑦ | Inner Jacket | NA | LD-PE |
| ⑥ | PE Bag | 1 | Clear Print black "MADE IN CHINA"+ "1PC" |
| ⑤ | TIE | 1 | Black |
| ④ | Out Jacket | NA | Black PVC-45P |
| ③ | CONN | 1 | USB A Female Shell:Nickel Pin:G/F Insulator color:White, short type |
| ② | CONN | 1 | USB A Male Shell:Nickel Pin:G/F Insulator color:White |
| ① | Cable | 1 | USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Black |

RoHS compliant
 Unit: mm

| Scale | Free | Date | Name | Customer-No. |
|-----------|------|------------------------|--------------------|--------------|
| TOLERANCE | | Drawn | 18.11.2014 | Joanna |
| | ③ | Add new length version | 05.05.2019 | Xavier |
| | ② | Add new length version | 20.01.2017 | Amy |
| DIM | TOL | ① | Update the drawing | 09.05.2016 |
| | | ① | Drawn | 18.11.2014 |
| Angle | TOL | Id. | Modification | Date |



| | |
|--|-------------|
| ASSMANN WSW-No. AK669/2-xx-BLACK | |
| Drawing-No. | ASS 7241 CA |
| Replace | rev03 |
| Sheet | 1/1 |