© 2005 TE Connectivity. All Rights Reserved.

| REVISIONS 変更 | | | | | |
|---|---|---|---|---|---|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | B1 | REVISED PER ECR-21-115447 | 25FEB2022 | RR | SZ |






72P ONLY







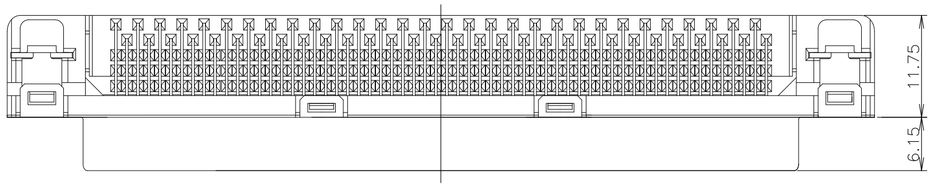


1. 材料及び表面処理
   - ·コンタクト：銅合金
     ニッケル下地めっきに接触部金めっき(表参照)
     タイン部すずめっき。
   - ·ハウジング：液晶ポリマー
   - ·タイン プレート：液晶ポリマー
   - ·シェル：銅，ニッケルめっき
   - ·リテンション レグ：黄銅，すずめっき
   - ·ガイド ソケット ：銅，ニッケルめっき
2. かん合相手コネクター ：X-5179139-X, X-5179140-X.
3. 製品規格：108-78233
4. 本寸法は点線内(左側4箇所，右側4箇所，計8箇所)に適用。
5. 4 を除く箇所に適用。
6. ガイド ソケットの締め付け最大トルク値：49Nm(5kgf-cm)

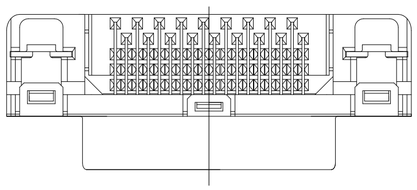1. MATERIAL & FINISH
   - ·CONTACT: COPPER ALLOY
     Au PL. AT CONTACT AREA(SEE TABLE)
     TIN PL. AT TINE OVER Ni PL.
   - ·HOUSING: LIQUID CRYSTAL POLYMERS
   - ·TINE PLATE: LIQUID CRYSTAL POLYMERS
   - ·SHELL: STEEL, Ni PL.
   - ·RETENTION LEG: BRASS, TIN PL.
   - ·GUIDE SOCKET : STEEL, Ni PL.
2. CONNECTOR TO BE MATED : X-5179139-X, X-5179140-X.
3. PRODUCT SPECIFICATION: 108-78233
4. APPLICABLE TO THE DOTTEP LINE SECTION. (8 TOTAL, 4 ON THE LEFT, 4 ON THE RIGHT)
5. EXCEPT NOTE 4
6. GUIDE SOCKET ON TORQUE: 49Nm(5kgf-cm) MAX.

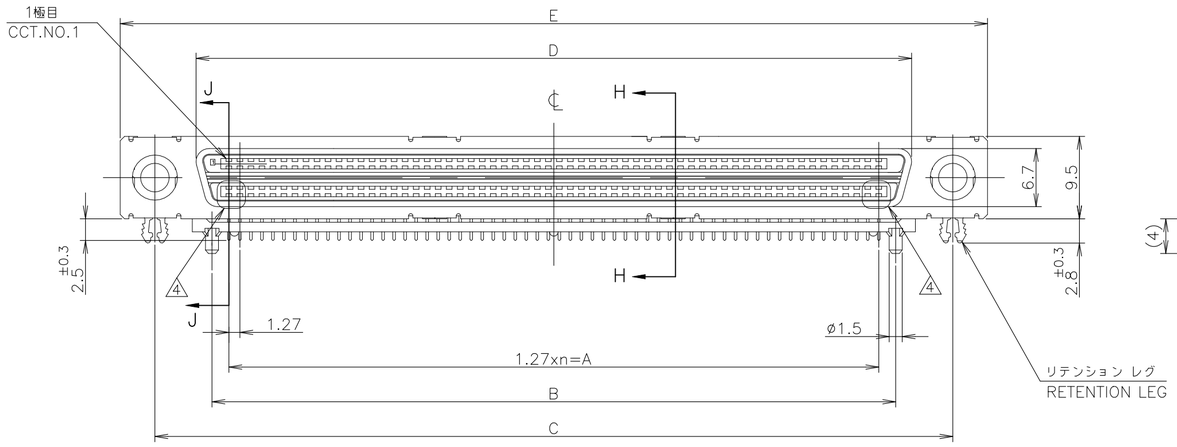

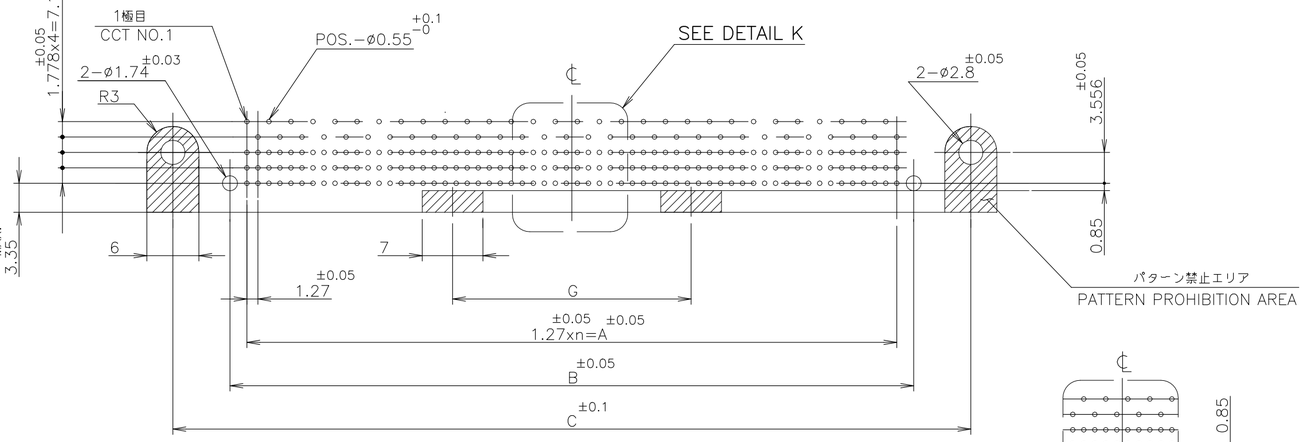


推奨基板穴あけ寸法 (コネクタ搭載面) RECOMMENDED PC BOARD MOUNTING DIMMENSIONS (COMPONENT SIDE)




DETAIL K
(72P ONLY)

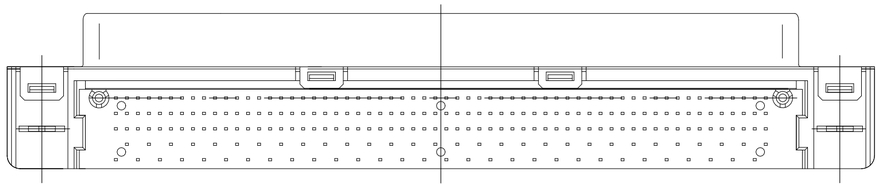


パネル カット寸法 (厚さ 0.55~1.2mm最大) RECOMMENDED PANEL CUTOUT (PANEL THICKNESS 0.55~1.2mm MAXIMUM)




J-J

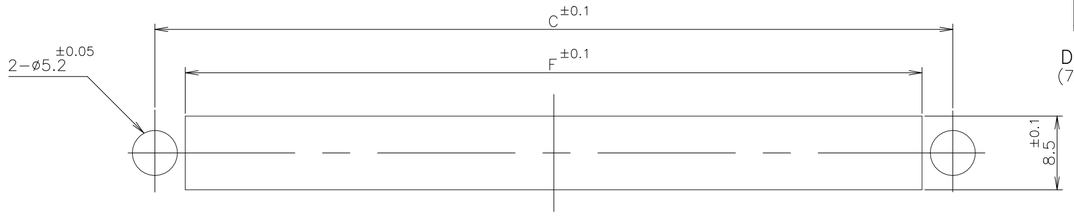


H-H

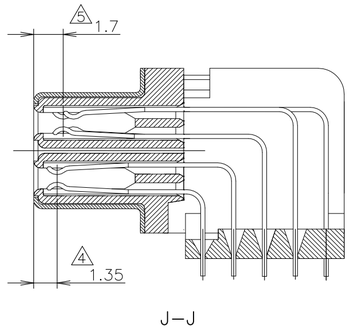


パネル取付図
PANEL MOUNT DWG

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| B1 OBSOLETE | | | | | | | | | | 0.76 μ | 4-5179135-4 |
| | 27.50 | 59.60 | 74.60 | 57.10 | 66.60 | 53.43 | 49.53 | 39 | 160P | 0.2 μ | 5179135-4 |
| | | 31.66 | 46.66 | 29.16 | 38.66 | 25.49 | 21.59 | 17 | 72P | 0.2 μ | 5179135-1 |
| | G | F | E | D | C | B | A | n | POS. | Aμ | P/N |

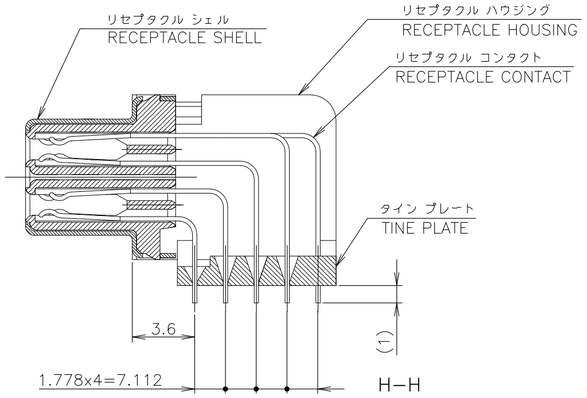THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: 単位：耗 mm

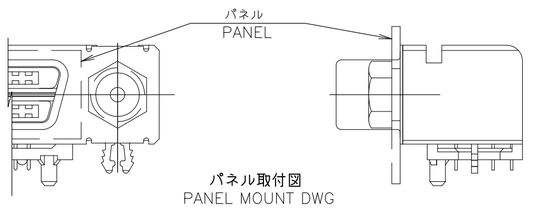TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差

| | |
|---|---|
| 0 PLC | ± – |
| 1 PLC | ± – |
| 2 PLC | ± – |
| 3 PLC | ± – |
| 4 PLC | ± – |
| ANGLES | ± – |

GENERAL TOLERANCE 一般公差
10 ≧ : ±0.2
30 ≧ > 10: ±0.25
100 ≧ > 30: ±0.3
ANGLES: ±3°

MATERIAL 材料 -1

FINISH 仕上 -1

| | | |
|---|---|---|
| DWN | A.KUBO | 20APR05 |
| CHK | Y.YAMAMOTO | 20APR05 |
| APVD | Y.YAMAMOTO | 20APR05 |
| PRODUCT SPEC 製品規格 | — | |
| APPLICATION SPEC 取付適用規格 | — | |
| WEIGHT | 0.000000 | |

TE Connectivity

NAME 名称: AMP DOCKING CONNECTOR
REC ASSY KIT (HORIZONTAL TYPE)
—

| SIZE | CAGE CODE | DRAWING NO 番号 | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-5179135 | — |

CUSTOMER DRAWING

| SCALE 尺度 | SHEET | REV |
|---|---|---|
| 2:1 | 1 OF 1 | B1 |

5179135