

5



4

3



2

1

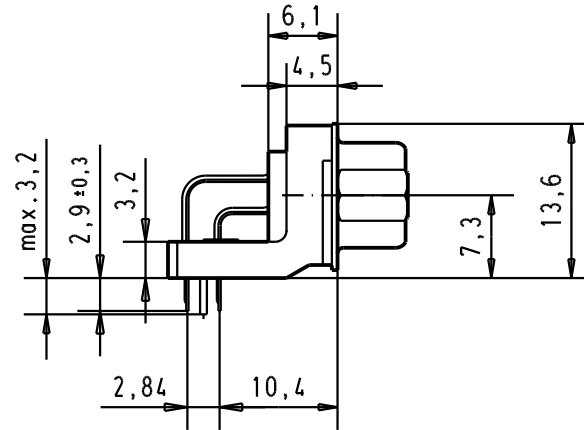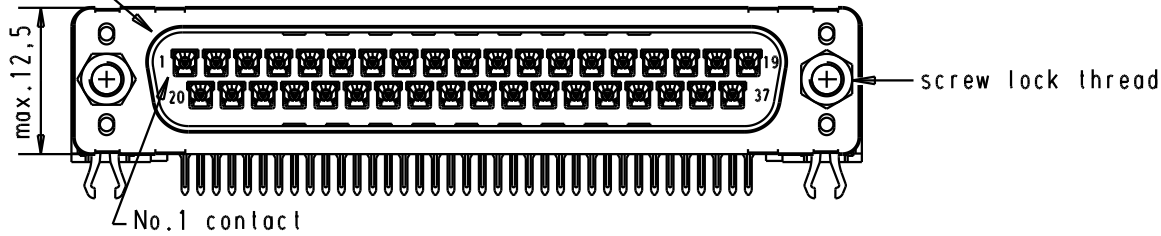

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

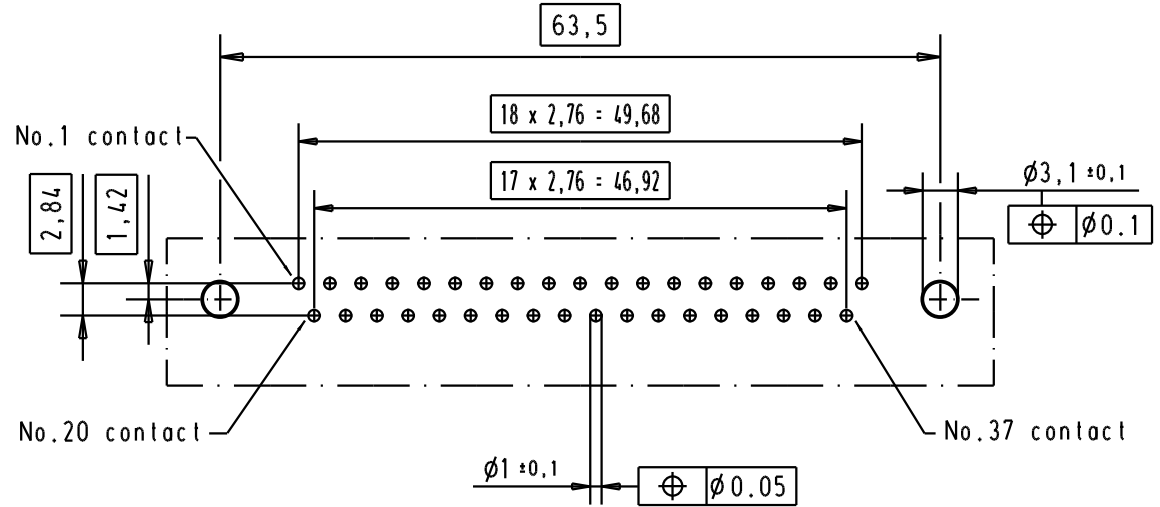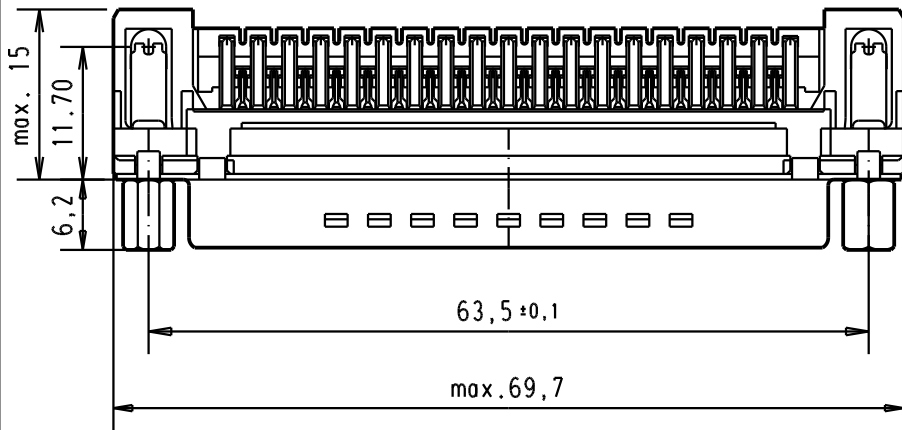

PCB layout hole component side



Connector retention and insertion forces on the PCB = 25 / 80 newtons

| | | | | | | | | | | | | |
|---|----------------|-------------------|-------------------|-------|-----------|------|-------------------------------|--|--|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------|
| A | 09 65 463 3833 | M3 | 1 | | | | | | |  All Dim. in mm Orig. Size DIN A 4 | D-Sub, male, standard angle, 37 poles, with solder pin, screw lock, grounding board lock | Maßstab/ Scale 1.5:1 |
| | 09 65 463 6833 | M3 | 2 | | | | | | | | | |
| | 09 65 463 7833 | M3 | 3 | | | | | | | | | |
| | 09 65 463 3813 | 4-40 UNC | 1 | | | | | | | | | |
| | 09 65 463 6813 | 4-40 UNC | 2 | | | | | | | | | |
| | 09 65 463 7813 | 4-40 UNC | 3 | 31084 | 04/SEP/02 | YT | | | | | | |
| | Part number | Screw lock thread | Performance level | Mod. | Dat. | Name | HARTING EURL F-95972 Paris | | |  | TB 0965463x8x3 | Blatt/ Page 1 / |
| | | | | | | | Sub. | | | | | |