

Pomona[®]

Model 4005 Insulated Banana Jack With Wire Wrapped Terminal

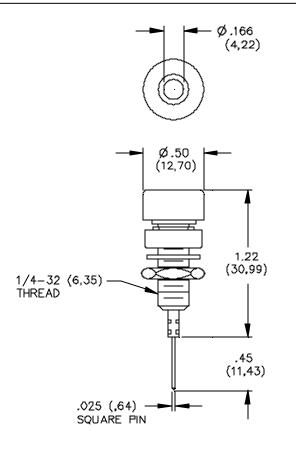



FEATURES:

Mounts in panels from 1.60 (.063) to 9.53 • (.375) thick.

MATERIALS:

Banana Jack: Nickel Plated Brass Terminal: Gold Plated Phosphor Bronze Insulation: Polycarbonate Mounting Base: Polycarbonate Lockwasher: Steel Hex Nut: Brass

RATINGS:

Voltage: Hand-held testing: 30VAC/60VDC Max. Hands free testing in controlled voltage environments: 2500 WVDC Max. Operating Temperature: +115°C (+239°F) Max. Current: 3 Amperes

ORDERING INFORMATION: Model 4005-*

*=Color, -0 Black, -1 Brown, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White Ordering Example: 4005-2 Color is Red Sold in packages of 10

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02^{\circ}$ (,51 mm), $.xxx = \pm .005^{\circ}$ (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/EH/LS

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 S:\Engineering\Release\DataSheets\FlukeDataSheet\d4005_1_01.doc

PomonaACCESS 90222 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com Page 1 of 1