




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	MAR15/18	L.CHAN

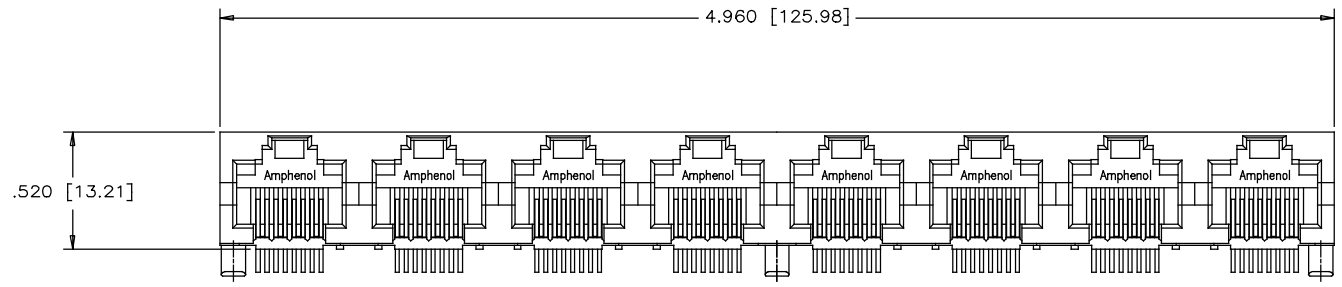

FRONT VIEW

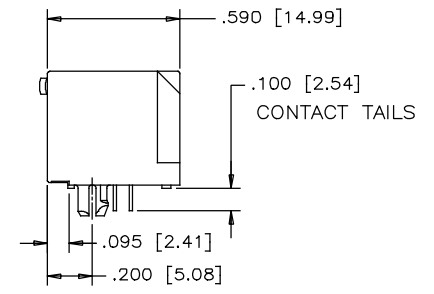

SIDE VIEW

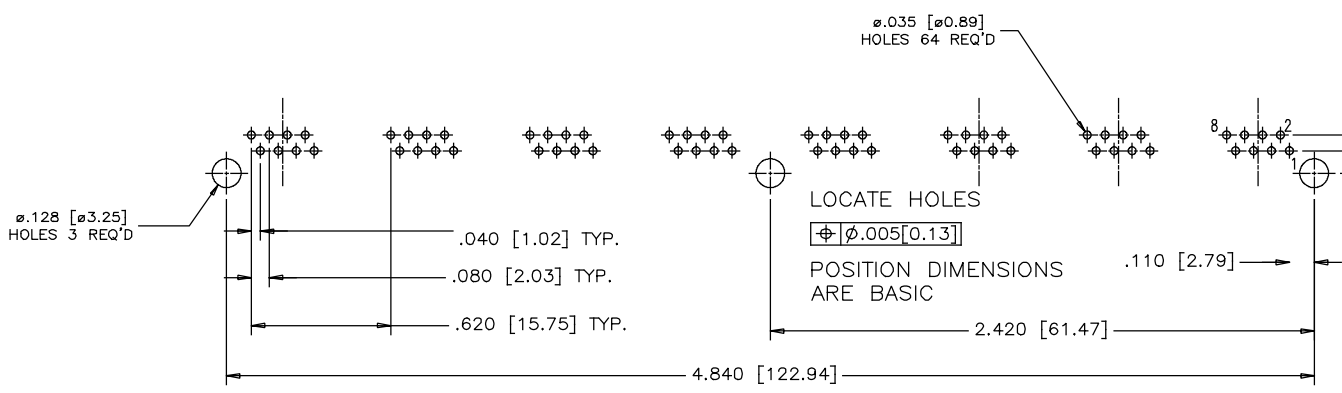

RECOMMENDED P.C.B. LAYOUT  
(COMPONENT SIDE OF BOARD)


PART NUMBER: RJHSE-X080-08

GOLD PLATING

- E=RJ45 FLAT CONTACT 6u"
- G=RJ45 FLAT CONTACT 15u"
- J=RJ45 FLAT CONTACT 30u"
- 5=RJ45 FLAT CONTACT 50u"

**MATERIALS:**  
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0, COLOR BLACK

**CONTACTS:** PHOSPHOR BRONZE  
 PLATING: GOLD PLATING ON MATING SURFACE.  
 [SEE PART NUMBER FOR THICKNESS]  
 50 μ" [1.27 MICRONS]  
 MIN. NICKEL UNDERPLATE  
 100 μ" [2.54 MICRONS]  
 MIN. MATTE TIN ON CONTACT TAILS.

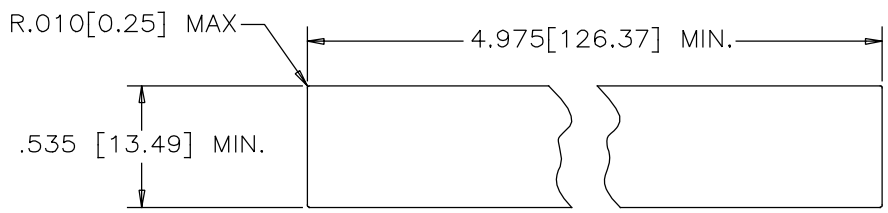

RECOMMENDED PANEL CUTOUT



THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE		DRAWN <i>W.QIU</i>	DATE <i>MAR15/18</i>	<b>Amphenol Canada Corp.</b> www.amphenolcanada.com
PRIMARY UNITS INCH		CHECKED <i>L.CHAN</i>	DATE <i>MAR15/18</i>	
SECONDARY MILLIMETER		M.E. APP'D		TITLE
REFERENCE IN PARENTHESES		Q.A. APP'D		EIGHT-PORT HIGH SPEED MODULAR JACK, 8 POSITIONS, 8 CONTACTS, UNSHIELD WITHOUT LEDS -RoHS COMPLIANT
GENERAL TOLERANCES		DWG APPR.		DWG. NO.
1 DECIMAL PLACE ±0.025		ENG. REL. NO.		P-RJHSE-X080-08
2 DECIMAL PLACES ±0.020		REF.		REV <i>A</i>
3 DECIMAL PLACES ±0.015		THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554   DWG SIZE: C   SCALE: N/A   SHEET 1 OF 1
ANGULAR DEGREES ±1.0°				