


PC board drilling dimensions  
(after plating - thickness: 1.60 to 3.20 mm)

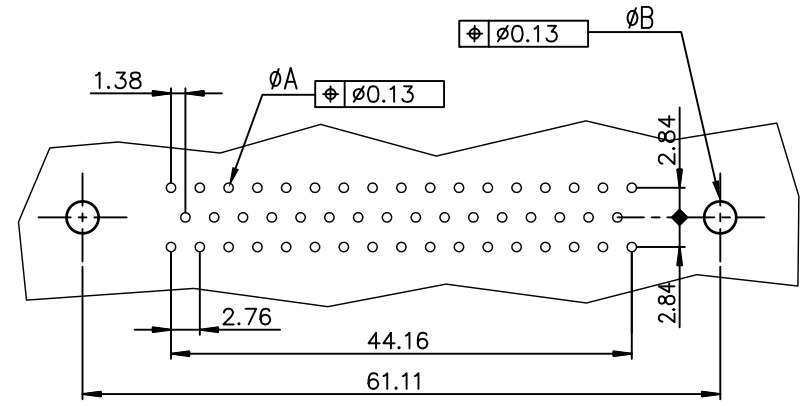

ROHS PART NUMBER

PART NUMBER	
Flash gold	D50S91C4GV00LF
0.76» gold	D50S91C6GV00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0001

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family D-SUB	
Ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
D	-	LEN	1996-07-25	angles	linear	mm		FEMALE CRS DELTA D	
E	LS05-004	MPE	2005-02-08			scale 2:1		50 EUROPE STRAIGHT PF 4-40 SCREW	
F	LS06-0095	LGO	2006-06-28	0°±2'				dwg no	
G	LS06-0140	LGO	2006-29-03	dr	LENOIR	1994-06-24		sheet 1 of 1 size	
H	ELX-I-24020	AAB	2016-06-06	eng	MITHUN PAUL	2016-06-06		C01-8646-0258 A3	
				chr	ATHUL A.B	2016-06-06		type Product Customer Drawing	
				appd	BIJU K PAUL	2016-06-06			
sheet index	revision sheet	H							
	1								