

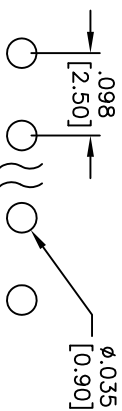
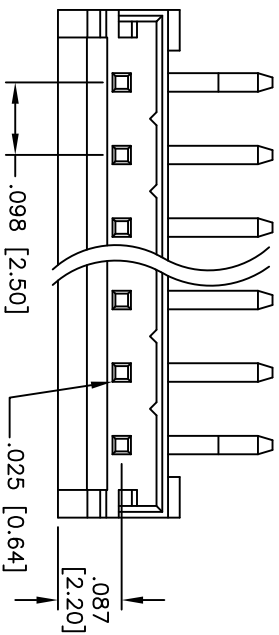


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-	7741	RELEASED	04/24/07	
A		REDRAWN	4/13/09	

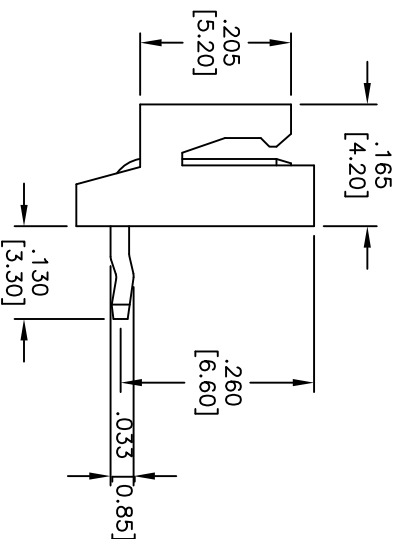

RECOMMENDED PCB LAYOUT

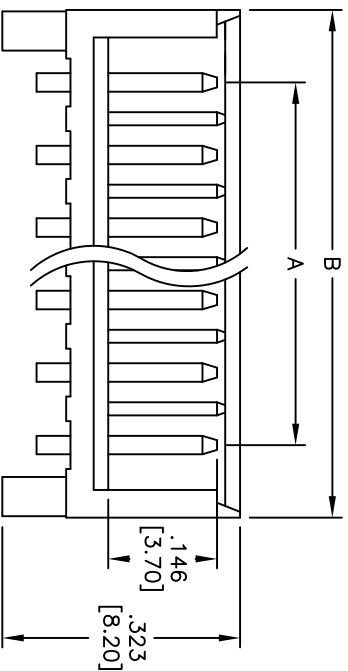

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: White

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 800 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Positions: 2 thru 15
 A = No. of Spaces x .098 [2.50]
 B = No. of Positions x .098 [2.50] + .098 [2.50]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 2.5mm WAFER, RIGHT ANGLE 2P TO 15P



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]			
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	BW	04/24/07	
CHECKED			
APPROVED			

SIZE	PART NO.	REV.
X	25SH-C-XX-TR	A
REF: S00016T	SCALE: NTS	SHEET 1 OF 1