




Dimensions mm[inch]

tolerances acc. to DIN ISO 2768-m
Toleranzen gem. DIN ISO 2768-m


Isometric

Scale 1:2
Maßstab 1:2

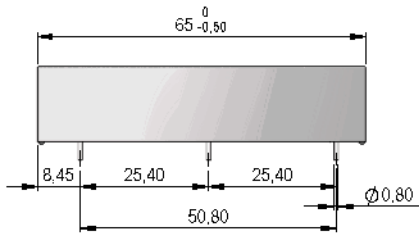

Layout

Top view
Draufsicht



Marking

according to EN60062/Factory code
gem. EN60062/Fertigungsstätte



| Coil Data at 20 °C | Conditions | Min | Typ | Max | Unit |
|--------------------|--|-----|-------|-------|------|
| Coil resistance | | 945 | 1.050 | 1.155 | Ohm |
| Coil voltage | | | 24 | | VDC |
| Rated power | | | 554 | | mW |
| Coil current | | | 22,8 | | mA |
| Thermal resistance | max. Relay temperature = operating temperature + self heating | | 26 | | K/W |
| Pull-In voltage | | | | 18 | VDC |
| Drop-Out voltage | | 2 | | | VDC |

| Contact data 83 | Conditions | Min | Typ | Max | Unit |
|---------------------------|--|-----|-----|-------|-------|
| Contact rating | Any DC combination of V & A not to exceed their individual max.'s | | | 50 | W |
| Switching voltage | DC or Peak AC | | | 7.500 | V |
| Switching current | DC or Peak AC | | | 3 | A |
| Carry current | DC or Peak AC | | | 5 | A |
| Contact resistance static | Measured with 40% overdrive Start Value | | | 150 | mOhm |
| Insulation resistance | RH <45 %, 100 V test voltage | 1 | | | TOhm |
| Breakdown voltage | according to EN 60255-5 | 10 | | | kV DC |
| Operate time incl. bounce | measured with 40% overdrive | | | 3,2 | ms |
| Release time | measured with no coil excitation | | | 1,5 | ms |
| Capacitance | @ 10 kHz across open switch | | 1 | | pF |

| Special Product Data | Conditions | Min | Typ | Max | Unit |
|------------------------------------|-------------------------------|-----|-----|-------------------------|-------|
| Number of contacts | | | | 1 | |
| Contact - form | | | | A - NO | |
| Dielectric Strength Coil/Contact | according to EN 60255-5 | 10 | | | kV DC |
| Insulation resistance Coil/Contact | RH <45%, 200 VDC test voltage | 1 | | | TOhm |
| Case colour | | | | grey | |
| Housing material | | | | Polycarbonat | |
| Sealing compound | | | | Polyurethan | |
| Connection pins | | | | Copper alloy tin plated | |
| Magnetic Shield | | | | no | |
| Reach / RoHS conformity | | | | yes | |



Europe: +49 / 7731 8399 0

| Email: info@standexmeder.com

Item No.:

USA: +1 / 508 295 0771

| Email: salesusa@standexmeder.com

8524183002

Asia: +852 / 2955 1682

| Email: salesasia@standexmeder.com

Item:

HE24-1A83-02

| Environmental data | Conditions | Min | Typ | Max | Unit |
|-----------------------|-----------------------------|-----|-----|-----|--------------|
| Shock | 1/2 sine wave duration 11ms | | | 50 | g |
| Vibration | from 10 - 2000 Hz | | | 20 | g |
| Operating temperature | | -20 | | 70 | °C |
| Storage temperature | | -25 | | 85 | °C |
| Soldering temperature | wave soldering max. 5 sec. | | | 260 | °C |
| Washability | | | | | fully sealed |

Modifications in the sense of technical progress are reserved

Designed at: 27.11.07 Designed by:

Approval at: 12.03.08 Approval by: RRIPPL

Last Change at: 08.04.14 Last Change by: WKOVACS

Approval at: 16.04.14 Approval by: DSTASTNY

Version: 06