

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 24 AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: Ø0.16 x 11
 Resistance at 20 °C: 94.2 Ω /km max



Outer jacket

Material: PVC
 Color: black
 Diameter: 3 ±0.15 mm
 Nominal thickness: 0.42 mm
 Resistance at 20 °C: 10 MΩ /km min

Wire marking: E339579 UL AWM STYLE 2468 24 AWG 80°C
 300V VW-1 - - - cUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ±2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ±1 °C /1 hour, no observed degradation
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ±2 °C /1 hour, no observed cracking

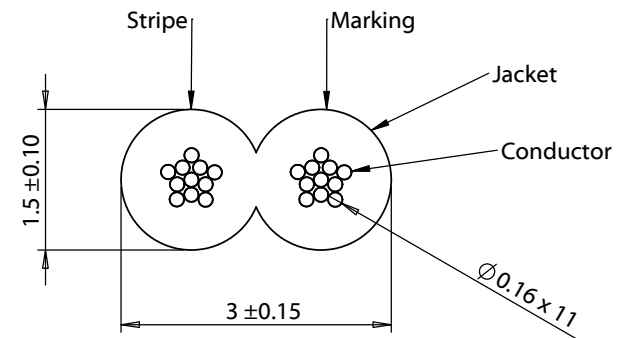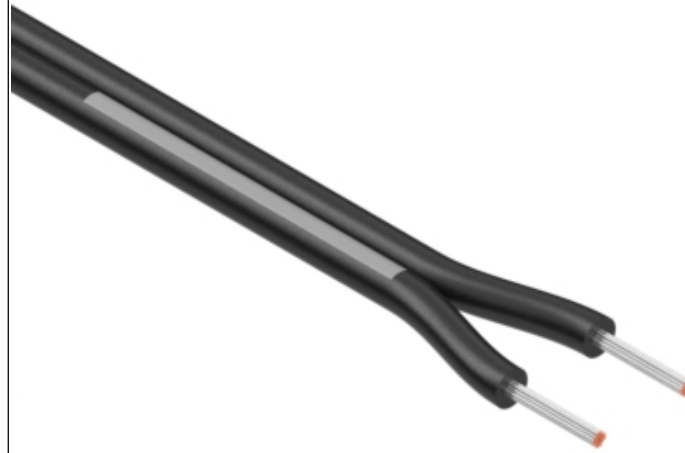

Revision:	Date:	Description:
A	07/08/2014	Initial release
A1	01/08/2016	Corrected tolerances
A2	09/06/2018	Increased operating temperature range

Prepared: AW <small>Digitally signed by AW Date: 2018.09.06 11:34:25 -07'00'</small>
Verified: PS <small>Digitally signed by PS Date: 2018.09.06 12:26:36 -07'00'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS and REACH compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 2C TS, 24 AWG, UL2468, 300V, 80C, 3.0 mm, VW-1, PVC

<h1>TENSILITY</h1>		
<small>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</small>		
Size: A	Part number: 30-00404	
Scale: 12:1		Sheet 1 of 1

5

4

3

2

1