VIEW ON MATING SIDE

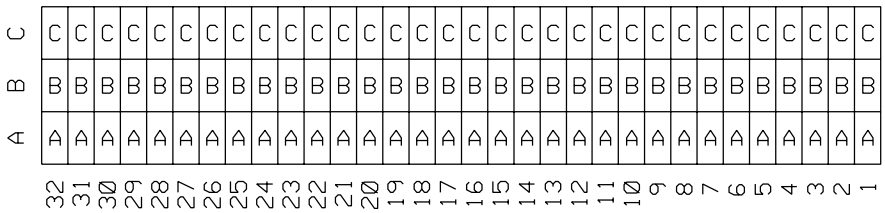

A = 32 CONTACTS L=3,4
B = 32 CONTACTS L=3,4
C = 32 CONTACTS L=3,4

S = 96 TOTAL NUMBER OF CONTACTS

Marking	Standard
Performance level	G2/0 = Contact area level2 / Termination tin
Flux proof	yes
Fixing clip	no
Dimensions	SDA-85052-0001 sht.1
Technical Data	PS-85052-0001

Contact symbol	Perform. level	Contact position number
C	G2/0	c1-32
B	G2/0	b1-32
A	G2/0	a1-32

first release
see ECN No. 2154

REVISIONS

LTR	FOR PREVIOUS REVISIONS SEE MRI LIST
A	

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°

	INCH	METRIC
3 PLACE	± .	±
2 PLACE	± .	±
1 PLACE	± .	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☐ MM ☐ IN.

EQUIVALENT DIMENSION ☐ MM ☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY	Ca	SIGN
CHK'D BY	KN	SIGN
APP'D BY		SIGN
SCALE		

REVISE ONLY ON CAD SYSTEM | SH. | REV.

CADCAM PROJECT NAME s8505200 s71

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
96 pos. female connector acc. DIN 41612 style R contacts arrangement

MOLEX EUROPE

SHEET NO. 1 OF 1

DATE 96/06/13

PART NO. 85052-0074

DWG NO. SDA-85052-0074

SIZE A