


LOC	DIST	REVISIONS				
CM	0	REV	DESCRIPTION	DATE	BY	APPV
B		1	REVISED PER ECO-12-007810	28JUL12	KH	SM

- 1 UNIT ACCEPTS 1.14[.045] SQUARE OR ROUND POST.
- 2 UNIT ACCEPTS STANDARD SL-156 CONTACTS.
- 3 UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
- 4 IDENTIFICATION NUMBER FOR ALL POSITIONS, OR FOR POSITION 1 ONLY, WILL BE LOCATED AS SHOWN.
- 5 OPTIONAL CONSTRUCTION, BOTH ENDS.
- 6 DIMENSIONS IN BRACKETS ARE IN INCHES.

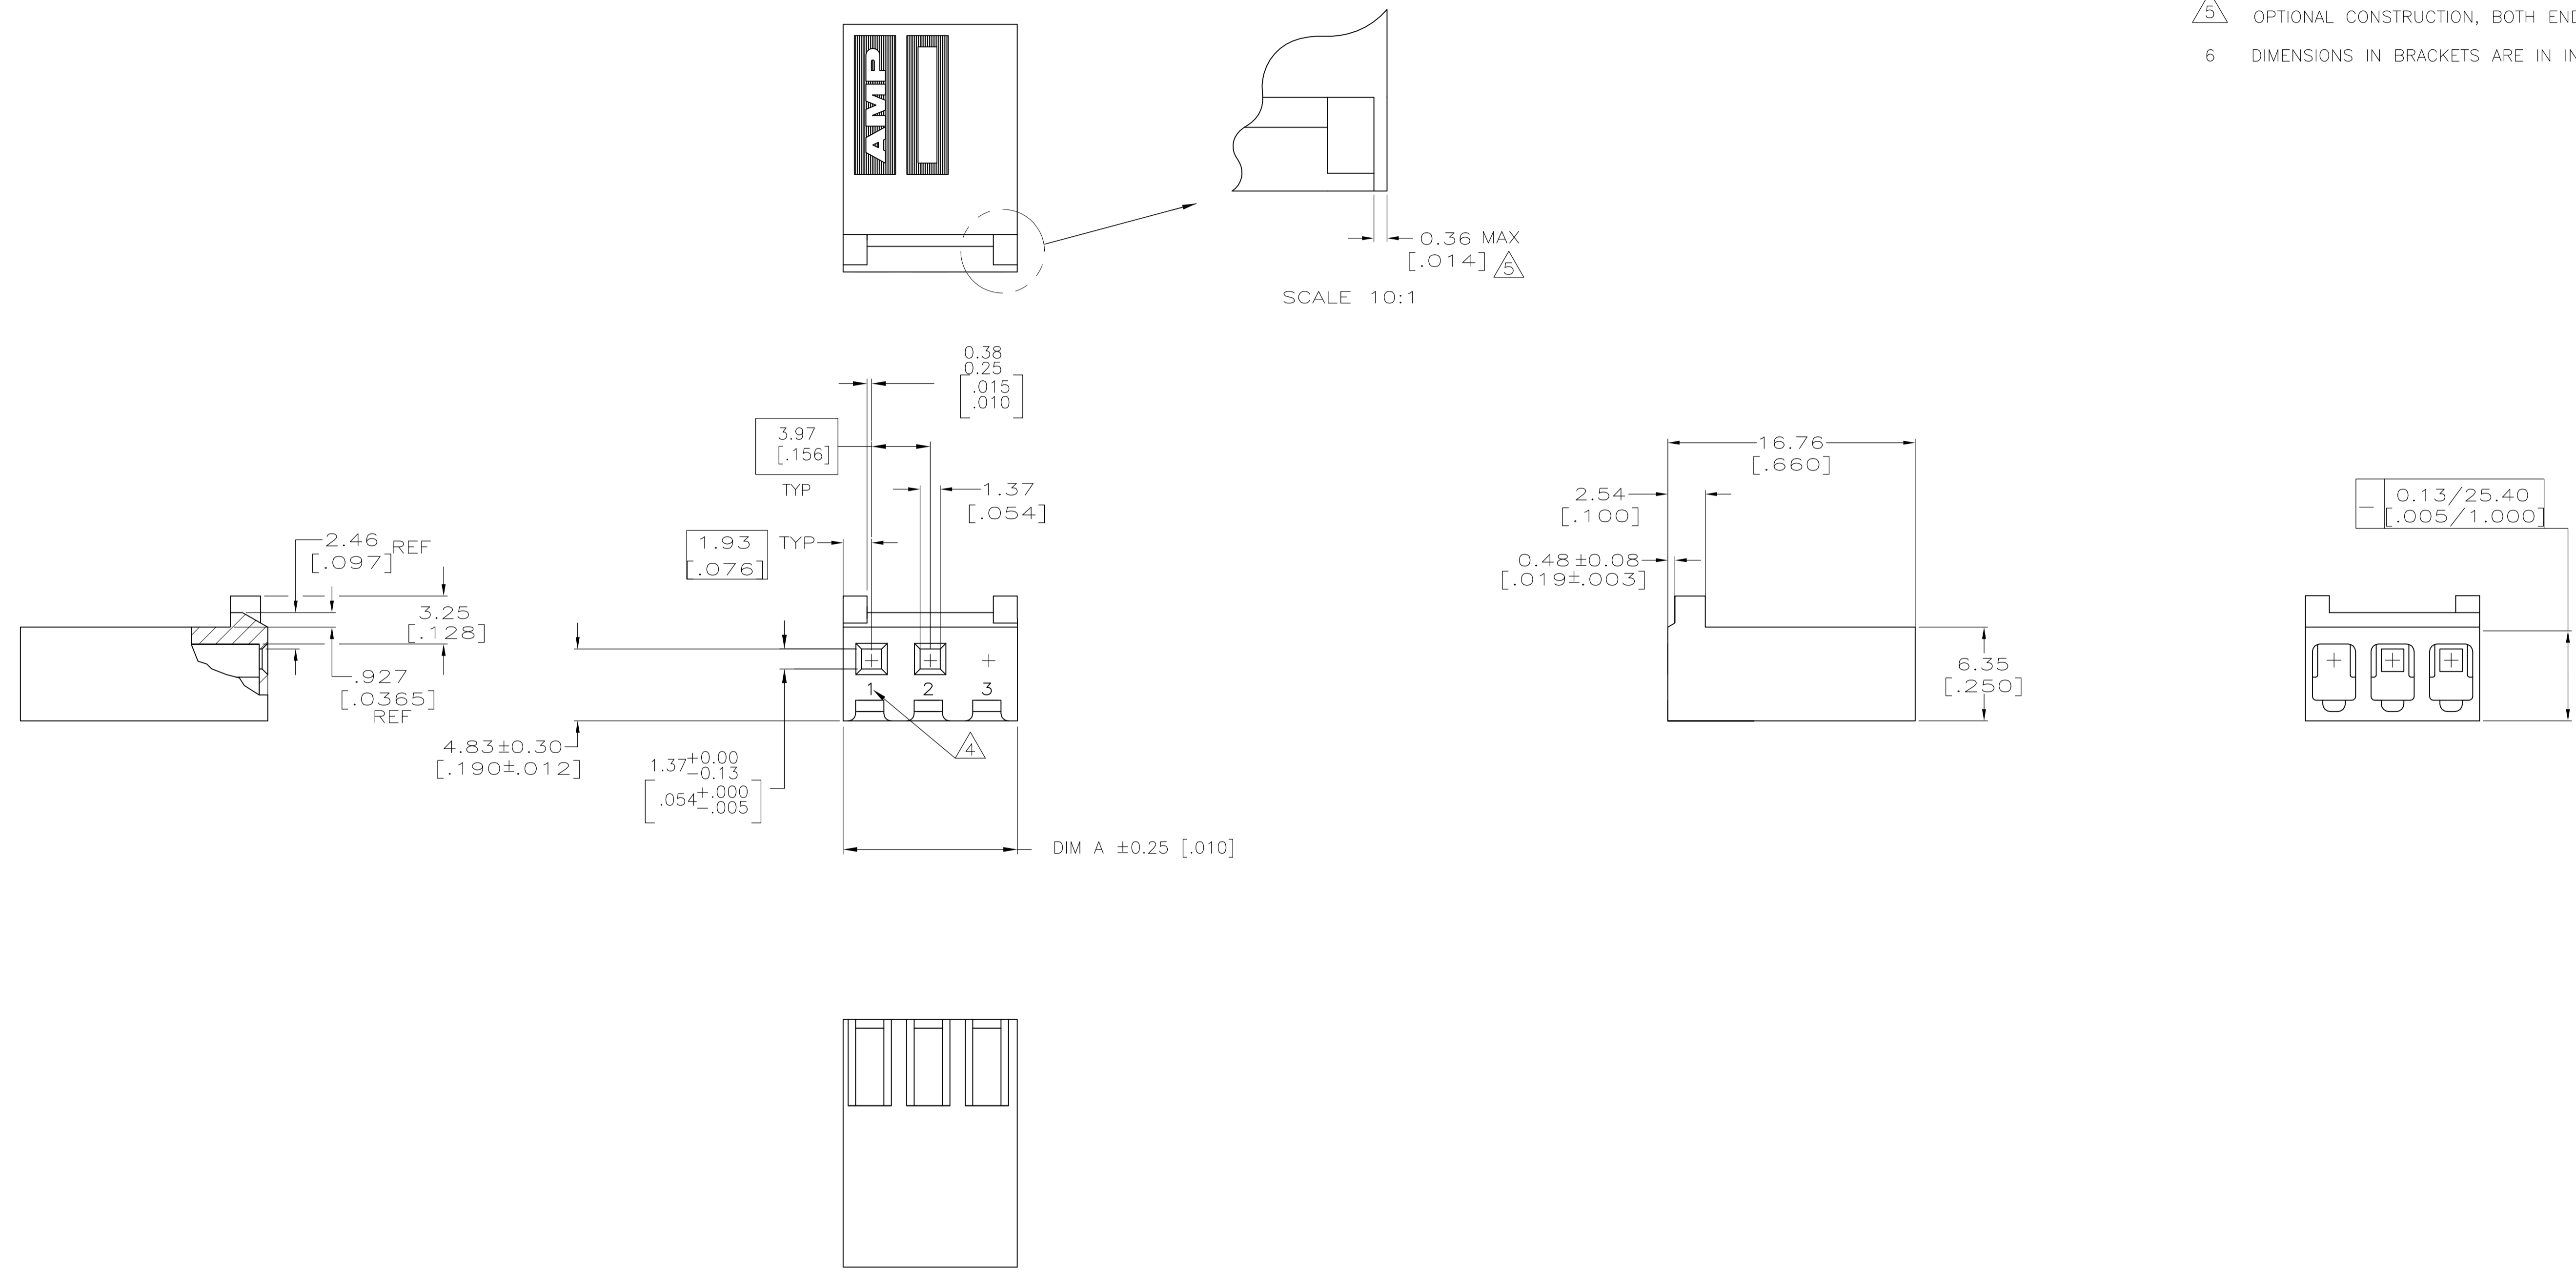

DIM A	NO OF POSN	PART NUMBER
27.69 [1.090]	7	647344-7
19.74 [.777]	5	647344-5
11.81 [.465]	3	647344-3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG K. WHITAKER 04NOV2005	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. ROSSI 04NOV2005	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPV D. ROSSI 04NOV2005	HOUSING WITH LOCKING RAMP AND POLARIZING TABS, POSITION 3 BLOCKED, SL-156	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	SIZE	
2 PLC ± -	3 PLC ± 0.13 [.005]	APPLICATION SPEC	CAGE CODE	
4 PLC ± -	ANGLES ± -	WEIGHT	DRAWING NO	
MATERIAL NYLON, UL 94V-0		FINISH	RESTRICTED TO	
METRIC		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV B	