



IOLAN DS1 and TS2 Serial to Ethernet Device Servers



- 1 or 2 serial Ports
- Software selectable RS232/422/485 or fixed RS232 serial port interface
- 10/100 Ethernet
- Extended temperature model available


The **IOLAN DS/TS Device Server** is the best choice for simple **serial to Ethernet** connectivity applications.

Delivering a cost effective solution in a compact size, the IOLAN DS/TS offers flexibility and advanced [TrueSerial®](#) technology making it ideal for applications that require an authentic serial connection across an Ethernet network.

IOLAN DS1 Device Servers are also available with support for [Extended Temperature Ranges](#).

Features and Benefits

- [TrueSerial®](#) delivers the most authentic serial connections across Ethernet
- 66 Mhz, 87 MIPS processor for the best performance on the market
- Indicators for network and serial interfaces for easy troubleshooting
- Plug & Play installation utility eliminates configuration hassles for all IOLANs on you IP network
- TruePort software provides true remote serial ports over an Ethernet LAN
- [Share a serial port with multiple TCP or UDP servers](#)
- [Software Development Kit](#) available to develop powerful custom applications
- Power over serial cable models eliminate costs of a separate power installation
- Next Generation IP support (IPv6) for investment protection and network compatibility
- Compact and protective solid steel enclosure for tabletop, wall mount or DIN rail mounting



Flexible and Reliable Serial to Ethernet Connections

The IOLAN DS/TS is ideal for connecting serial-based COM port, UDP or TCP socket based applications to remote devices. Perle's [TruePort re-director](#) provides fixed TTY or COM ports to server based applications enabling communication with remote devices connected to Perle device servers. You can also tunnel serial data between devices across an IP network.

Easy to set up and manage, the IOLAN DS1 has a software selectable RS-232/422/485 interface capability which simplifies setup and eliminates mechanical tampering associated with DIP switch based products.

Perle's Device Management software, shipped as standard with the IOLAN DS/TS, provides better centralised control and management of multiple units resulting in maximum uptime for your remote equipment. Protection against electrostatic discharges and power surges is provided on the IOLAN DS/TS with its robust 15Kv ESD protection circuitry enabling organisations to utilise this solution with confidence.

IOLAN Plug-ins

Backed with the experience of connecting hundreds of thousands of different devices to Ethernet over the years, using a Perle Device Server you can rest assured that virtually any device with a serial COM port will operate in conjunction with your desired application exactly as it did when you had it directly connected. If the unlikely event occurs that the Perle Device Server does not enable this out of the box, *Perle will make it work*.

Perle IOLAN Device Servers utilize customer installable "Device Plug-ins" to successfully network devices where other solutions have failed. [Request a free engineering consultation now](#).

Advanced IP Technology

With support for Next Generation IP (IPv6) the IOLAN range provides organizations with investment protection to



meet this rapidly growing standard.

Demand for IPv6, which is compatible with IPv4 addressing schemes, is driven by the need for more IP address. With the implementation and rollout of 3G cellular networks, a robust method is needed to handle the huge influx of new IP addressable devices on the Internet. In fact, the US Department of Defense has mandated that all equipment purchased from 2005 be IPv6 compatible with full implementation by 2008. In addition, all major Operating Systems such as Windows, Linux, Unix and Solaris, as well as routers, have built-in support for IPv6.

It is therefore important for end users and integrators to select networking equipment that incorporates the IPv6 standard. The IOLAN line with support for IPv6 already built in, is the best choice in serial to Ethernet technology.

Lifetime Warranty

The **Perle IOLAN DS/TS Device Server** is backed by the best service and support in the industry including Perle's unique lifetime warranty. Since 1976 Perle has been providing its customers with networking products that have the highest levels of performance, flexibility and quality.

Serial Port Access	
	Connect directly using Telnet and Reverse Telnet
	Multihost access enables multiple hosts/servers to share serial ports
Accessibility	
	In-band (ethernet) and out-of-band (dial-up modem) support
	IPV6 and IPV4 addressing support
Availability	
	Primary/Backup host functionality enables automatic connections to alternate host(s)
Security	
	Local database USERID/PASSWORD
	Disable unused daemons
Terminal Server	
	Telnet
	Auto session login
	MOTD - Message of the day
Serial machine to Ethernet	
	Tunnel raw serial data across Ethernet
	Raw serial data over TCP/IP
	Raw serial data over UDP
	Serial data control of packetized data
	Share serial ports with multiple hosts/servers
	Virtual modem simulates a modem connection - assign IP address by AT phone number
	TruePort com/tty redirector for serial based applications on Windows, Vista, Linux, Solaris, SCO and HP UX. For latest drivers click here
	
	
	" TrueSerial packet technology provides the most authentic serial connections across Ethernet ensuring serial protocol integrity"
	RFC 2217 standard for transport of serial data and RS232 control signals
	Customizable or fixed serial baud rates
	Plug-ins allow customer or Perle provided plug-ins for special applications
	Software Development Kit (SDK) available
	Serial encapsulation of industrial protocols such as ModBus, DNP3 and IEC-870-5-101
	ModBus TCP gateway enables serial Modbus ASCII/RTU device connection to ModBus TCP
	Data logging will store serial data received when no active TCP session and forward to network peer once session re-established - 4K bytes circular per port
Console Management	
	Sun Break Safe
	Reverse Telnet
OA&M (Operations, Administration and Management)	
	SNMP V3* - read and write, Perle MIB

Syslog
Perle Device Manager - Windows based utility for large scale deployments
Configurable default configuration
Installation Wizard
Set a Personalized Factory Default for your IOLANs

Protocols

IPv6, IPv4, TCP/IP, ARP, RARP, UDP, UDP Multicast, ICMP, BOOTP, DHCP, TFTP, Telnet, raw, reverse Telnet, WINS, HTTP, SNMPV3*, RFC2217

* No SNMPV3 encryption. For full SNMPV3 support see [IOLAN SDS Device Servers](#).

Hardware Specifications - IOLAN DS1 - TS2

	IOLAN DS1	IOLAN TS2
Processor	MPC852T, 66 Mhz, 87 MIPS	
Memory		
RAM MB	16	16
Flash MB	4	4
Interface Ports		
Number of Serial Ports	1	2
Serial Port Interface	Software selectable RS-232/422/485 on DB25M, DB25F, DB9M or RJ45	RS-232 on RJ45 - 10 pin
Sun / Solaris	Sun break safe	
Serial Port Speeds	50bps to 230Kbps with customizable baud rate support	
Data Bits	5,6,7,8, 9-bit protocol support	
Parity	Odd, even, Mark, Space, None	
Flow Control	Hardware, Software, Both, None	
Serial Port Protection	15Kv Electrostatic Discharge Protection (ESD)	
Local Console Port	RS232 on Serial Port	
Network	10-base T / 100-base TX ethernet RJ45	
	Software selectable Ethernet speed 10/100 Auto	
	Software selectable Half/Full/Auto duplex	
Ethernet Isolation	1.5Kv Magnetic Isolation	
Power		
Power Supply	120 V AC (USA), 230V AC (International) Wall Power Adaptor included	
Power Supply Options	Power via External power 9-30v DC, 4.8 Watts uses standard 5.5mm x 9.5mm x 2.1mm barrel socket, Power IN over serial cable.	
Nominal Input Voltage	12v DC	
Input Voltage Range	9-30v DC	
Power IOLAN over Serial	9 - 30v DC with DB25 and RJ45 models	N/A
Typical Power Consumption @ 12v DC (Watts)	1.7	
Indicators		
LEDs	Power / Ready	
	Network Link	
	Network Link activity	
	Serial: Transmit and Receive data per port	
Environmental Specifications		
Heat Output (BTU/HR)	5.8	
MTBF (Hours)	124,004	299,680
Operating Temperature	0°C to 55°C, 32°F to 131°F	0°C to 55°C, 32°F to 131°F
Storage Temperature	-40°C to 66°C, -40°F to 150°F	-40°C to 66°C, -40°F to 150°F
Humidity	5 to 95% (non condensing) for both storage and operation.	
Case	SECC Zinc plated sheet metal (1 mm)	
Ingress Protection Rating	IP40	

Mounting Wall or Panel mounting . DIN Rail mounting kit optional

Product Weight and Dimensions

Weight	230 Grams
Dimensions	91 x 64 x 24 (mm), 3.6 x 2.5 x 0.92 (in) case dimensions not including mounting tabs, 91 x 89 x 24 (mm), 3.6 x 3.5 x 0.92 (in) includes mounting tabs.

Packaging

Shipping Dimensions	25.5 x 16.5 x 6.5 (cm), 10 x 6.5 x 2.6 (in)
Shipping Weight	0.75 KG including Power Adaptor

Regulatory Approvals

Emissions	FCC Part 15, Subpart B, Class A
	CFR47:2003, Chapter 1, Part 15 Subpart B,(USA) Class A
	ICES-003, Issue 4, February 2004 (Canada)
	EN55022:1998 + A1:2000 + A2:2003 Class A
	EN61000-3-2 : 1995, Limits for Harmonic Current Emissions
	EN61000-3-3 : 1995, Limits of Voltage Fluctuations and Flicker
Immunity	EN55024:1998 + A1:2001 + A2:2003
	EN61000-4-2: Electrostatic Discharge
	EN61000-4-3: RF Electromagnetic Field Modulated
	EN61000-4-4: Fast Transients
	EN61000-4-5: Surge
	EN61000-4-6: RF Continuous Conducted
	EN61000-4-8: Power-Frequency Magnetic Field
	EN61000-4-11: Voltage Dips and Voltage Interruptions
Safety	IEC 60950-1 : 2005 (2nd Edition) + A1 : 2009 and EN 60950-1 : 2006 + A11 : 2009
	CAN/CSA-C22.2 No. 60950-1-03 and ANSI/UL 60950-1, First Edition April 1st 2003 (Recognized Component)
Other	RoHS - 2002/95/EC Directive
	WEEE - 2002/96/EC Directive
	ECCN - 5A991A
	HTSUS Number: 8471.80.1000
	Perle Lifetime warranty

Serial Connector Pinout

IOLAN DB9M Socket	Direction	RS232	RS485 Full Duplex	RS485 Half Duplex	RS422
1	←	DCD	-	-	-
2	←	RxD	RxD+	-	RxD+
3	→	TxD	TxD+	DATA+	TxD+
4	→	DTR	-	-	-
5	—	GND	GND	GND	GND
6	←	DSR	RxD-	-	RxD-
7	—	RTS	-	-	-
8	←	CTS	-	-	-
9	—	-	TxD-	DATA-	TxD-

IOLAN RJ45 Socket	Direction	RS232	RS485 Full Duplex	RS485 Half Duplex	RS422
1	—	Power In	Power In	Power In	Power In
2	←	DCD	-	-	-
3	→	RTS	TxD+	DATA+	TxD+
4	←	DSR	-	-	-
5	→	TxD	TxD-	DATA-	TxD-
6	←	RxD	RxD+	-	RxD+
7	—	GND	GND	GND	GND
8	←	CTS	RxD-	-	RxD-
9	→	DTR	-	-	-
10	—	-	-	-	-

IOLAN DB25M Socket	Direction	RS232	RS485 Full Duplex	RS485 Half Duplex	RS422
1	—	Shield	Shield	Shield	Shield
2	→	TxD	-	-	-
3	←	RxD	-	-	-
4	→	RTS	-	-	-
5	←	CTS	-	-	-
6	←	DSR	-	-	-
7	—	GND	GND	GND	GND
8	←	DCD	-	-	-
9	—	-	-	-	-
12	—	Power In	Power In	Power In	Power In
13	—	-	-	-	CTS-
14	—	-	TxD+	DATA+	TxD+
15	—	-	TxD-	DATA-	TxD-
18	—	-	-	-	RTS+
19	—	-	-	-	RTS-
20	→	DTR	-	-	-
21	—	-	RxD+	-	RxD+
22	—	-	RxD-	-	RxD-
25	—	-	-	-	CTS+


IOLAN DB25F Socket	Direction	RS232	RS485 Full Duplex	RS485 Half Duplex	RS422
1	—	Shield	Shield	Shield	Shield
2	←	RxD	-	-	-
3	→	TxD	-	-	-
4	←	CTS	-	-	-
5	→	RTS	-	-	-
6	→	DTR	-	-	-
7	—	GND	GND	GND	GND
8	←	DCD	-	-	-
9	—	-	-	-	-
12	—	Power In	Power In	Power In	Power In
13	—	-	-	-	RTS-
14	—	-	RxD+	-	RxD+
15	—	-	RxD-	-	RxD-
18	—	-	-	-	CTS+
19	—	-	-	-	CTS-
20	←	DSR	-	-	-
21	—	-	TxD+	DATA+	TxD+
22	—	-	TxD-	DATA-	TxD-
25	—	-	-	-	RTS+

[Optional Perle adapters for use with straight thru CAT5 cabling](#)

TCP

Using RAW TCP Sockets


A raw TCP socket connection which can be initiated from the serial-Ethernet device or from the remote host/server. This can either be on a point to point or shared basis where a serial device can be shared amongst multiple devices. TCP sessions can be initiated either from the TCP server application or from the Perle IOLAN **serial-Ethernet** adapter.

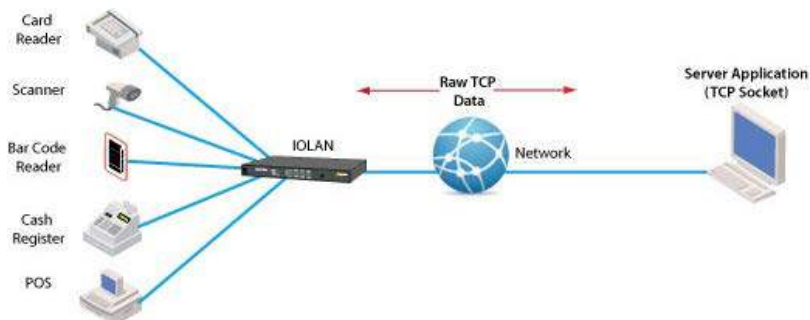

UDP

Using Raw UDP Sockets

For use with UDP based applications, Perle IOLANs can convert serial equipment data for transport across UDP packets either on a point to point basis or shared across multiple devices.

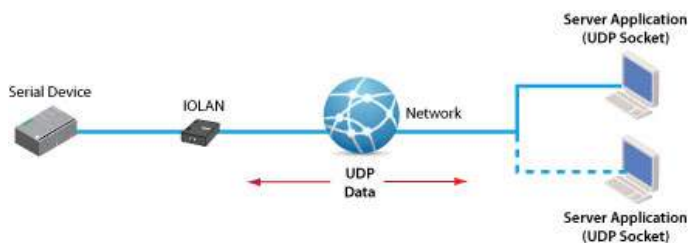

Console Server

Console Management


For access to remote console ports on routers, switches, etc, Perle IOLAN's enable administrators secure access to these RS232 ports via inband Reverse Telnet or out of band with dial-up modems. Perle IOLAN models with integrated modems are available.



COM/TTY

Connect Serial-based Applications with a COM/TTY Port Driver

Serial ports can be connected to network servers or workstations running Perle's TruePort software operating as a virtual COM port. Sessions can be initiated either from the Perle IOLAN or from TruePort.

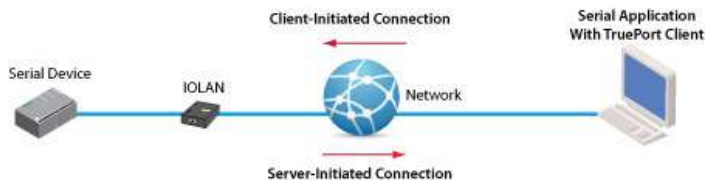

Tunneling

Serial Tunneling between two Serial Devices

Serial Tunneling enables you to establish a link across Ethernet to a serial port on another IOLAN. Both IOLAN serial

ports must be configured for Serial Tunneling (typically one serial port is configured as a Tunnel Server and the other serial port as a Tunnel Client).



Virtual Modem

Virtual Modem


Enables the serial-Ethernet adapter to simulate a modem connection. When connected to the IOLAN and initiates a modem connection, the IOLAN starts up a TCP connection to another IOLAN serial-Ethernet adapter configured with a Virtual Modem serial port or to a host running a TCP application.



	Description	Power Cord	Product Part Number
	IOLAN DS1 - 1 x DB9M serial port, software selectable RS232/422/485 interface,10/100 Ethernet	USA	04030124
		UK	04030121
		EU	04030122
	IOLAN DS1 - 1 x RJ45 serial port, software selectable RS232/422/485 interface,10/100 Ethernet	USA	04030114
		UK	04030111
		EU	04030112
	IOLAN DS1 - 1 x DB25M serial port, software selectable RS232/422/485 interface,10/100 Ethernet	USA	04030004
		UK	04030001
		EU	04030002
	IOLAN DS1 - 1 x DB25F serial port, software selectable RS232/422/485 interface,10/100 Ethernet	USA	04030134
		UK	04030131
		EU	04030132
	IOLAN DS1 - 1 x DB25M serial port, no AC adapter, software selectable RS232/422/485 interface,10/100 Ethernet	None	04030000
	IOLAN DS1 (BULK PACK) - 1 x DB25M serial port, pack of 20 units, no AC adapters, 1 CD included, software selectable RS232/422/485 interface,10/100 Ethernet	None	04030010
	IOLAN DS1T DB9M Device Server - 1 x DB9M connector, Extended Temperature, pigtail power connector included, software selectable, EIA-232/422/485 interface,10/100 Ethernet, IPv6,COM port redirector, 15kv ESD.	None	04030960
	IOLAN DS1T DB9M TB Device Server - 1 x DB9M connector, Extended Temperature, terminal block power connector, software selectable RS232/422/485 interface,10/100 Ethernet, IPv6,COM port redirector, 15kv ESD.	None	04030980
	IOLAN TS2 - 2 x RJ45 serial ports RS232 interface,10/100 Ethernet	US	04030644
		UK	04030641
		EU	04030642
		SA	04030645
		AUS	04030646

Accessories:

Accessories			
	3m Cbl-Straighthru	3 meter RJ45 to RJ45 CAT5 Straight-thru cable # 1100360-10	04005120
	DIN Rail Mount Kit	DIN Rail Mounting Kit for 1 or 2 port IOLAN DS, TS, SDS	04030030
	Ext. Temp Power Adapter AUS	Extended Temperature AUS power adapter for 12 volt Extended Temperature Terminal Servers, Media Converters and Ethernet Extenders	04030676
	Ext. Temp Power Adapter EU	Extended Temperature EU power adapter for 12 volt Extended Temperature Terminal Servers, Media Converters and Ethernet Extenders	04030672
	Ext. Temp Power Adapter SA	Extended Temperature SA power adapter for 12 volt Extended Temperature Terminal Servers, Media Converters and Ethernet Extenders	04030675
	Ext. Temp Power Adapter UK	Extended Temperature UK power adapter for 12 volt Extended Temperature Terminal Servers, Media Converters and Ethernet Extenders	04030671
	Ext. Temp Power Adapter USA	Extended Temperature USA power adapter for 12 volt Extended Temperature Terminal Servers, Media Converters and Ethernet Extenders	04030674

	Starter Kit (8-wire)	IOLAN Starter Kit (8-wire): 1x RJ-45 to DB-25 DTE Male adapter, 1x RJ-45 to DB-25 DCE Male adapter, 1x RJ-45 to DB-25 DTE Female adapter, 1x RJ-45 to DB-9 Male DTE adapter, 1x RJ-45 to DB-9 Female DTE adapter and 1x RJ45M-RJ45F Sun/Cisco crossover adapter	 04007000
Cable Accessories Please click here to see what adapters you may need			
	3m Cbl-Sun/Cisco Prl	3m Cbl-Sun/Cisco Prl - RJ45-RJ45 IOLAN DS to Sun/Cisco 3m Cable	 04030070
	DBA0010	DBA0010 - RJ-45F to DB-25F crossover (DTE) adapter for console port # 1100220-10	 04006950
	DBA0010 8pck	DBA0010 8pck - 8 pack of # 04006950 IOLAN-RJ45F to DB25F (DTE) crossover adapter	 04031240
	DBA0011	DBA0011 - RJ-45F to DB-25M crossover (DTE) adapter for console ports. # 1100230-10	 04006960
	DBA0011 8pck	DBA0011 8pck - 8 pack of # 04006960 IOLAN-RJ45F to DB25M (DTE) crossover adapter	 04031250
	DBA0013	DBA0013 - RJ-45F to DB-25M straight-thru (DCE) adapter for modems # 1100260-10	 04006990
	DBA0013 8pck	DBA0013 8pck - 8 pack of # 04006990 IOLAN-RJ45F to DB25M Straight-thru adapter for modems	 04031280
	DBA0020	DBA0020 - RJ-45F to DB-9F crossover (DTE) adapter for console ports. # 1100240-10	 04006970
	DBA0020 8pck	DBA0020 8pck - 8 pack of # 04006970 IOLAN-RJ45F to DB9F (DTE) crossover adapter	 04031260
	DBA0021	DBA0021 - RJ-45F to DB-9M crossover (DTE) adapter for console ports. # 1100250-10	 04006980
	DBA0021 8pck	DBA0021 8pck - 8 pack of # 04006980 IOLAN-RJ45F to DB9M (DTE) crossover adapter	 04031270
	DBA0023	DBA0023 - RJ-45F to DB-9M straight-thru (DCE) adapter for modems # 1100340-10	 04007200
	DBA0031	DBA0031 - IOLAN - RJ45M to RJ45F Sun/Cisco crossover adapter # 1100219-10	 04030080
	DBA0031 8pck	DBA0031 8pck - 8 pack of # 04030080 IOLAN-RJ45M to RJ45F Sun/Cisco crossover adapter	 04031230
Maintenance agreements - Console Server / Device Server / Terminal Server Please click here to check for maintenance availability in your region			
	NSS- 1 PortXPRESSREP	1 Port Terminal/Device/Console Server - Express Replacement	 SERNSS01
	NSS- 2 PortXPRESSREP	2 Port Terminal/Device/Console Server - Express Replacement	 SERNSS02
	NSS- 2 PortXPRESSREPF	2 Port Terminal/Device/Console Server - Express Replacement French	 SERNSS02F